



- **EC2 Instances list**

Shows two EC2 instances (mywebserver-1 and mywebserver-2) both Running in us-east-1b — these are the two backend web servers launched with a User Data script to auto-install Apache on startup.

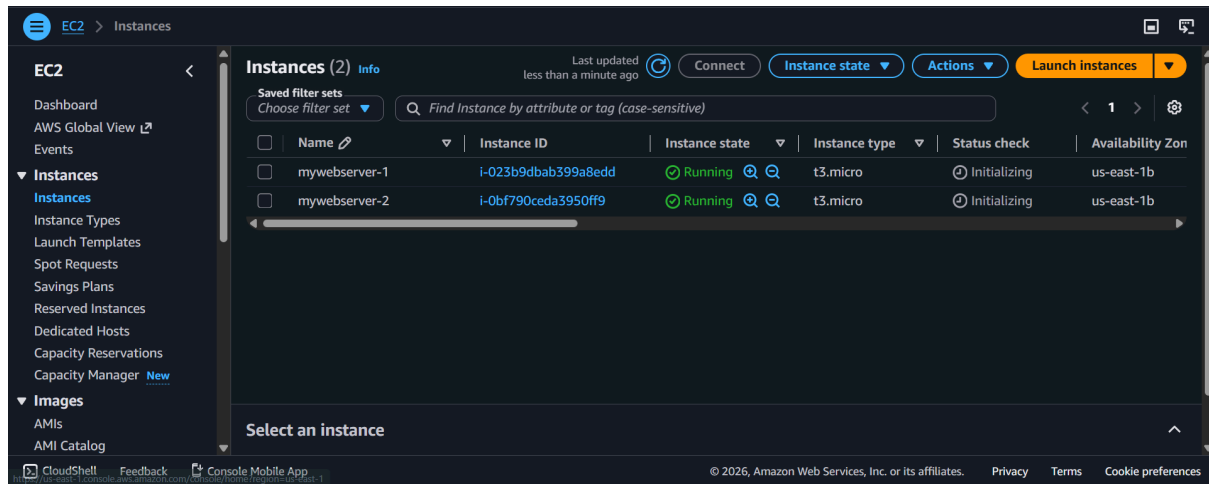


- **Target Group — myserver-Tg**

Shows the Target Group myserver-Tg with 2 total targets, both Healthy on HTTP port 80 — confirming both web servers are registered and ready to receive traffic from the Load Balancer.

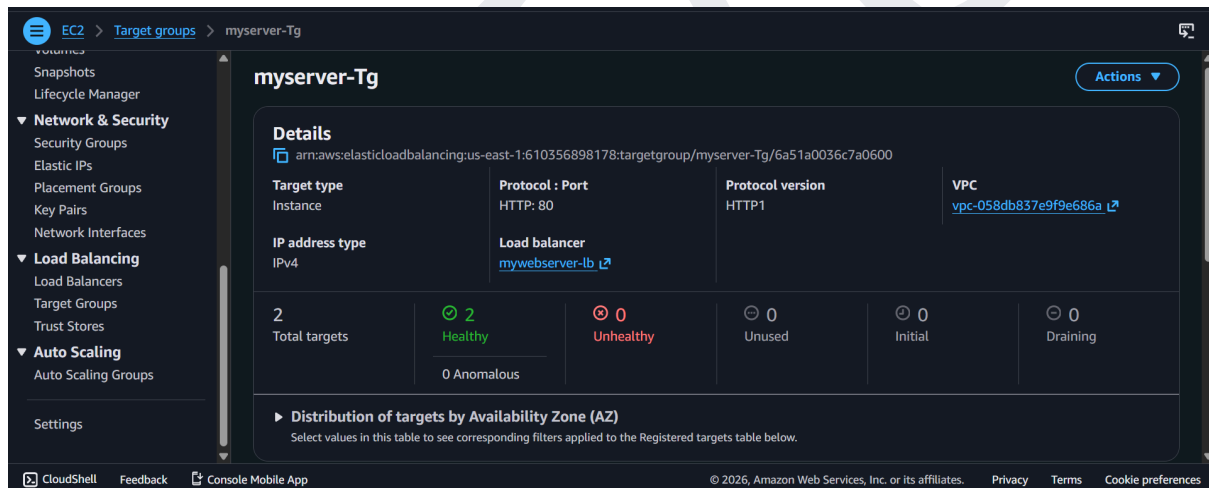


- **Security Group — mywebserver-lb-sg**

Shows the dedicated Security Group created for the Load Balancer, with one inbound rule allowing HTTP traffic on port 80 from anywhere — this ensures public traffic can reach the ALB before hitting the backend servers.

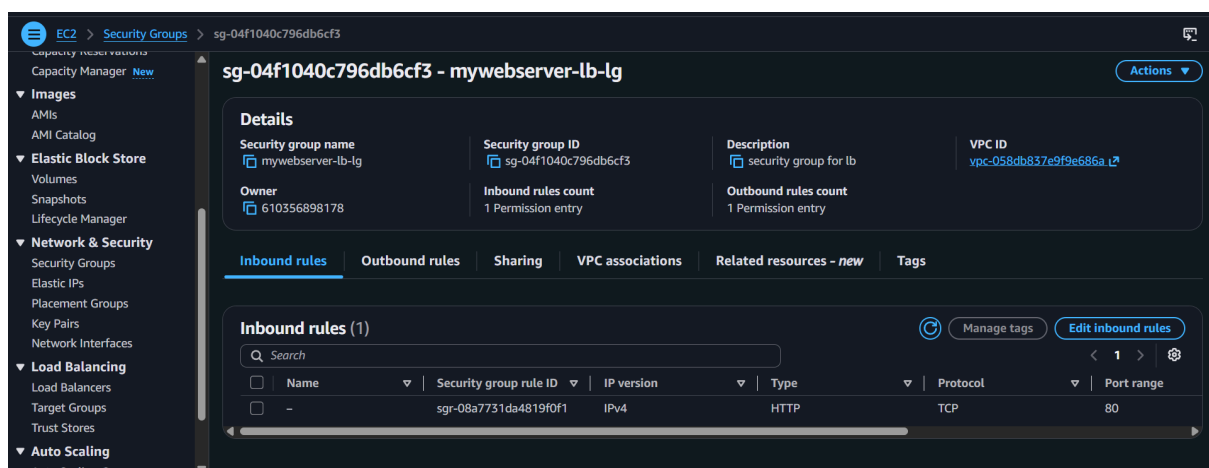


- **Browser test — two hostnames**

Shows the same ALB DNS URL refreshed twice, returning two different server hostnames — proving the Load Balancer is actively distributing requests across both EC2 instances.

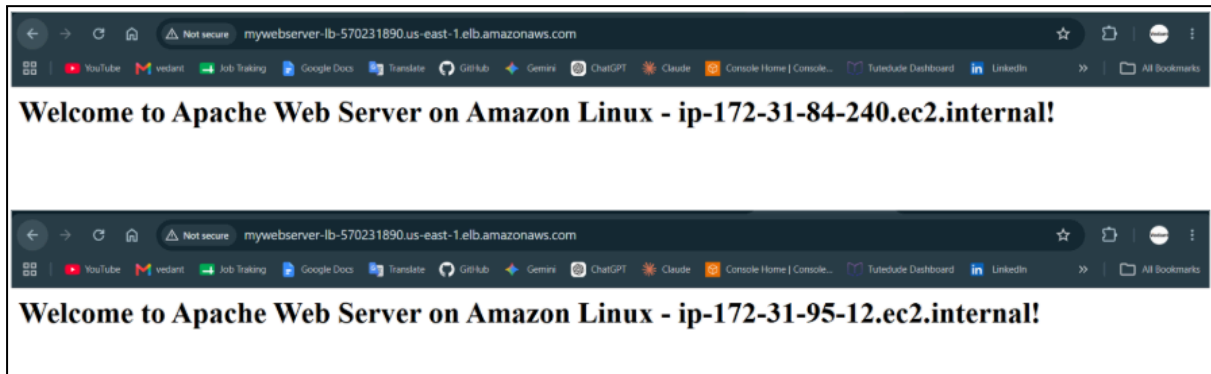


- **ALB Resource Map — both healthy**

Shows the full ALB architecture — 1 listener (HTTP:80), 1 rule forwarding to target group myserver-Tg, and both targets (i-023b9dbab399a8edd and i-0bf790ceda3950ff9) showing Healthy on port 80 — confirming the complete Load Balancer setup is working correctly with traffic distributed across both servers.

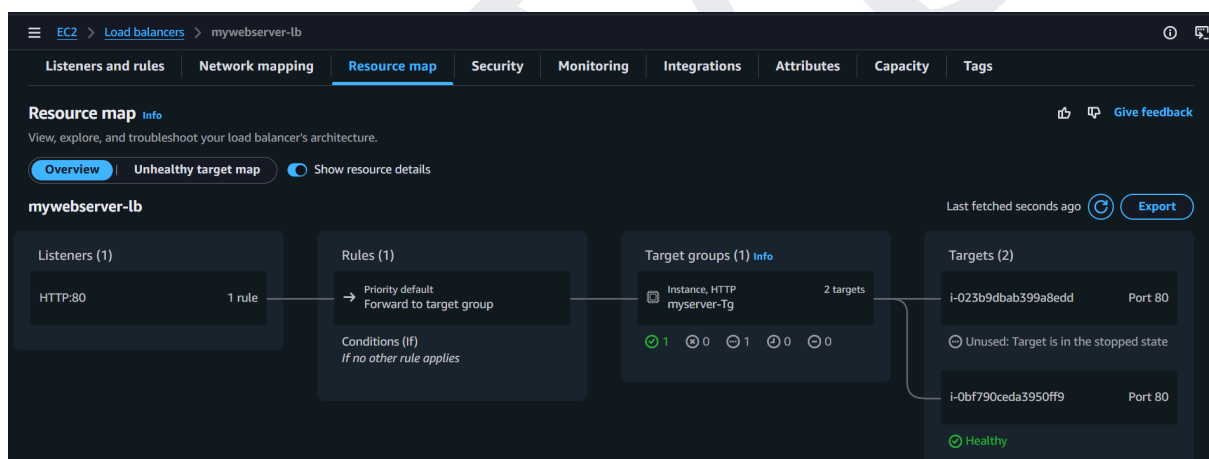

- **ALB Resource Map — one stopped**

Shows the same resource map after one instance was stopped — `i-023b9dbab399a8edd` now shows "Unused: Target is in the stopped state" while `i-0bf790ceda3950ff9` remains Healthy — confirming the ALB automatically detected the stopped server and is routing all traffic to the remaining healthy instance only.

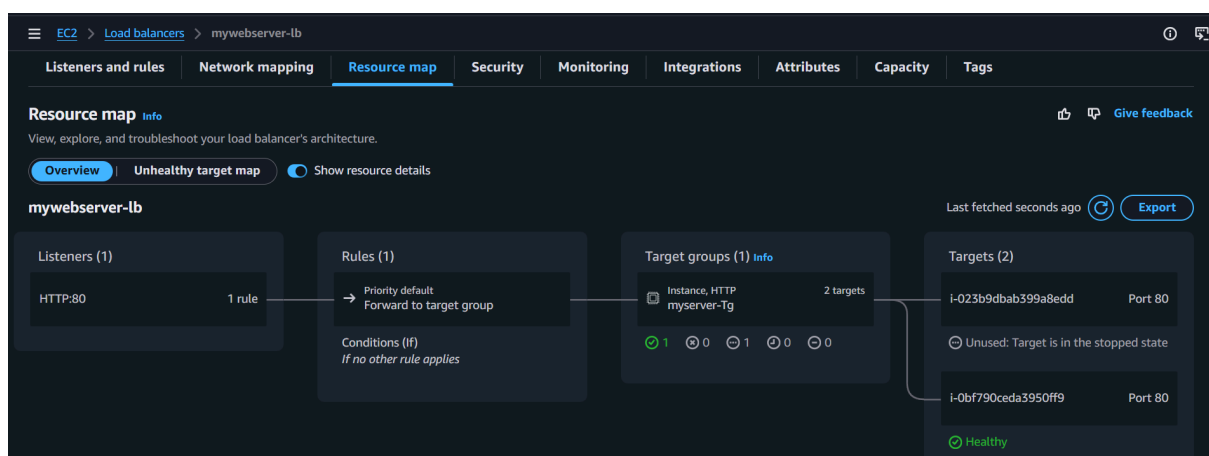

- **Browser test — single hostname**

Shows the ALB DNS URL now returning only one server's hostname consistently — confirming traffic is being routed to the remaining healthy instance only.

