

Question **1**

Correct

Marked out of 3.00

 [Flag question](#)

Objective

This is a simple challenge to help you practice printing to stdout.

We're starting out by printing the most famous computing phrase of all time! In the editor below, use either `printf` or `cout` to print the string ***Hello, World!*** to stdout.

Input Format

You do not need to read any input in this challenge.

Output Format



You do not need to read any input in this challenge.

Output Format

Print ***Hello, World!*** to stdout.

Sample Output

Hello, World!

Answer: (penalty regime: 0 %)

```
1  #include<stdio.h>
2  int main()
3  {
4      printf("Hello, World!")
5  }
```




Answer: (penalty regime: 0 %)

```
1  #include<stdio.h>
2  int main()
3  {
4      printf("Hello, World!")
5  }
```

	Expected	Got
✓	Hello, World!	Hello, World

Passed all tests! ✓

Question **2**

Correct

Marked out of 5.00

 [Flag question](#)**Objective**

This challenge will help you to learn how to take a character, a string and a sentence as input in C.

To take a single character **ch** as input, you can use `scanf("%c", &ch);` and `printf("%c", ch)` writes a character specified by the argument `char` to `stdout`:

```
char ch;  
scanf("%c", &ch);  
printf("%c", ch);
```

This piece of code prints the character **ch**.



Task

You have to print the character, ***ch***.

Input Format

Take a character, ***ch*** as input.

Output Format

Print the character, ***ch***.

Answer: (penalty regime: 0 %)

```
1  #include<stdio.h>
2  int main()
3  {
4      char ch;
5      scanf("%c",&ch);
6      printf("%c",ch);
7  }
```




```
1 #include<stdio.h>
2 int main()
3 {
4     char ch;
5     scanf("%c",&ch);
6     printf("%c",ch);
7 }
```

	Input	Expected	Got	
✓	C	C	C	✓

Passed all tests! ✓

Question **3**

Correct



Question **3**

Correct

Marked out of 7.00

[Flag question](#)**Objective**

The fundamental data types in c are int, float and char. Today, we're discussing int and float data types.

The printf() function prints the given statement to the console. The syntax is printf("format string",argument_list);. In the function, if we are using an integer, character, string or float as argument, then in the format string we have to write %d (integer), %c (character), %s (string), %f (float) respectively.

The scanf() function reads the input data from the console. The syntax is scanf("format string",argument_list);. For ex:

The scanf("%d",&number) statement reads integer number from the console and stores the given value in



reads integer number from the console and stores the given value in variable ***number***.

To input two integers separated by a space on a single line, the command is `scanf("%d %d", &n, &m)`, where ***n*** and ***m*** are the two integers.

Task

Your task is to take two numbers of **int data type**, two numbers of float data type as input and output their sum:

1. Declare **4** variables: two of type int and two of type float.
2. Read **2** lines of input from stdin (according to the sequence given in the 'Input Format' section below) and initialize your **4** variables.
3. Use the **+** and **-** operator to perform the following operations:
 - o Print the sum and difference of two int variable on a new line.
 - o Print the sum and difference of two float variable rounded to one decimal



'Input Format' section below) and initialize your **4** variables.

3. Use the **+** and **-** operator to perform the following operations:

- o Print the sum and difference of two int variable on a new line.
- o Print the sum and difference of two float variable rounded to one decimal place on a new line.

Input Format

The first line contains two integers.

The second line contains two floating point numbers.

Constraints

- $1 \leq \text{integer variables} \leq 10^4$
- $1 \leq \text{float variables} \leq 10^4$

Output Format

Print the sum and difference of both integers separated by a space on the



Output Format

Print the sum and difference of both integers separated by a space on the first line, and the sum and difference of both float (scaled to **1** decimal place) separated by a space on the second line.

Sample Input

10 4

4.0 2.0

Sample Output

14 6

6.0 2.0

Explanation

When we sum the integers **10** and **4**, we get the integer **14**. When we subtract the




Answer: (penalty regime: 0 %)

```
1  #include<stdio.h>
2  int main()
3  {
4      int a,b;
5      float c,d;
6      scanf("%d %d",&a,&b);
7      scanf("%f %f",&c,&d);
8      printf("%d %d\n",a+b,
9      printf("%.1f %.1f\n",
10     return 0;
11 }
```

	Input	Expected	Got
✓	10 4 4.0 2.0	14 6 6.0 2.0	14 6 6.0 2.0
✓	20 8 8.0 4.0	28 12 12.0 4.0	28 12 12.0 4.0

Passed all tests! ✓

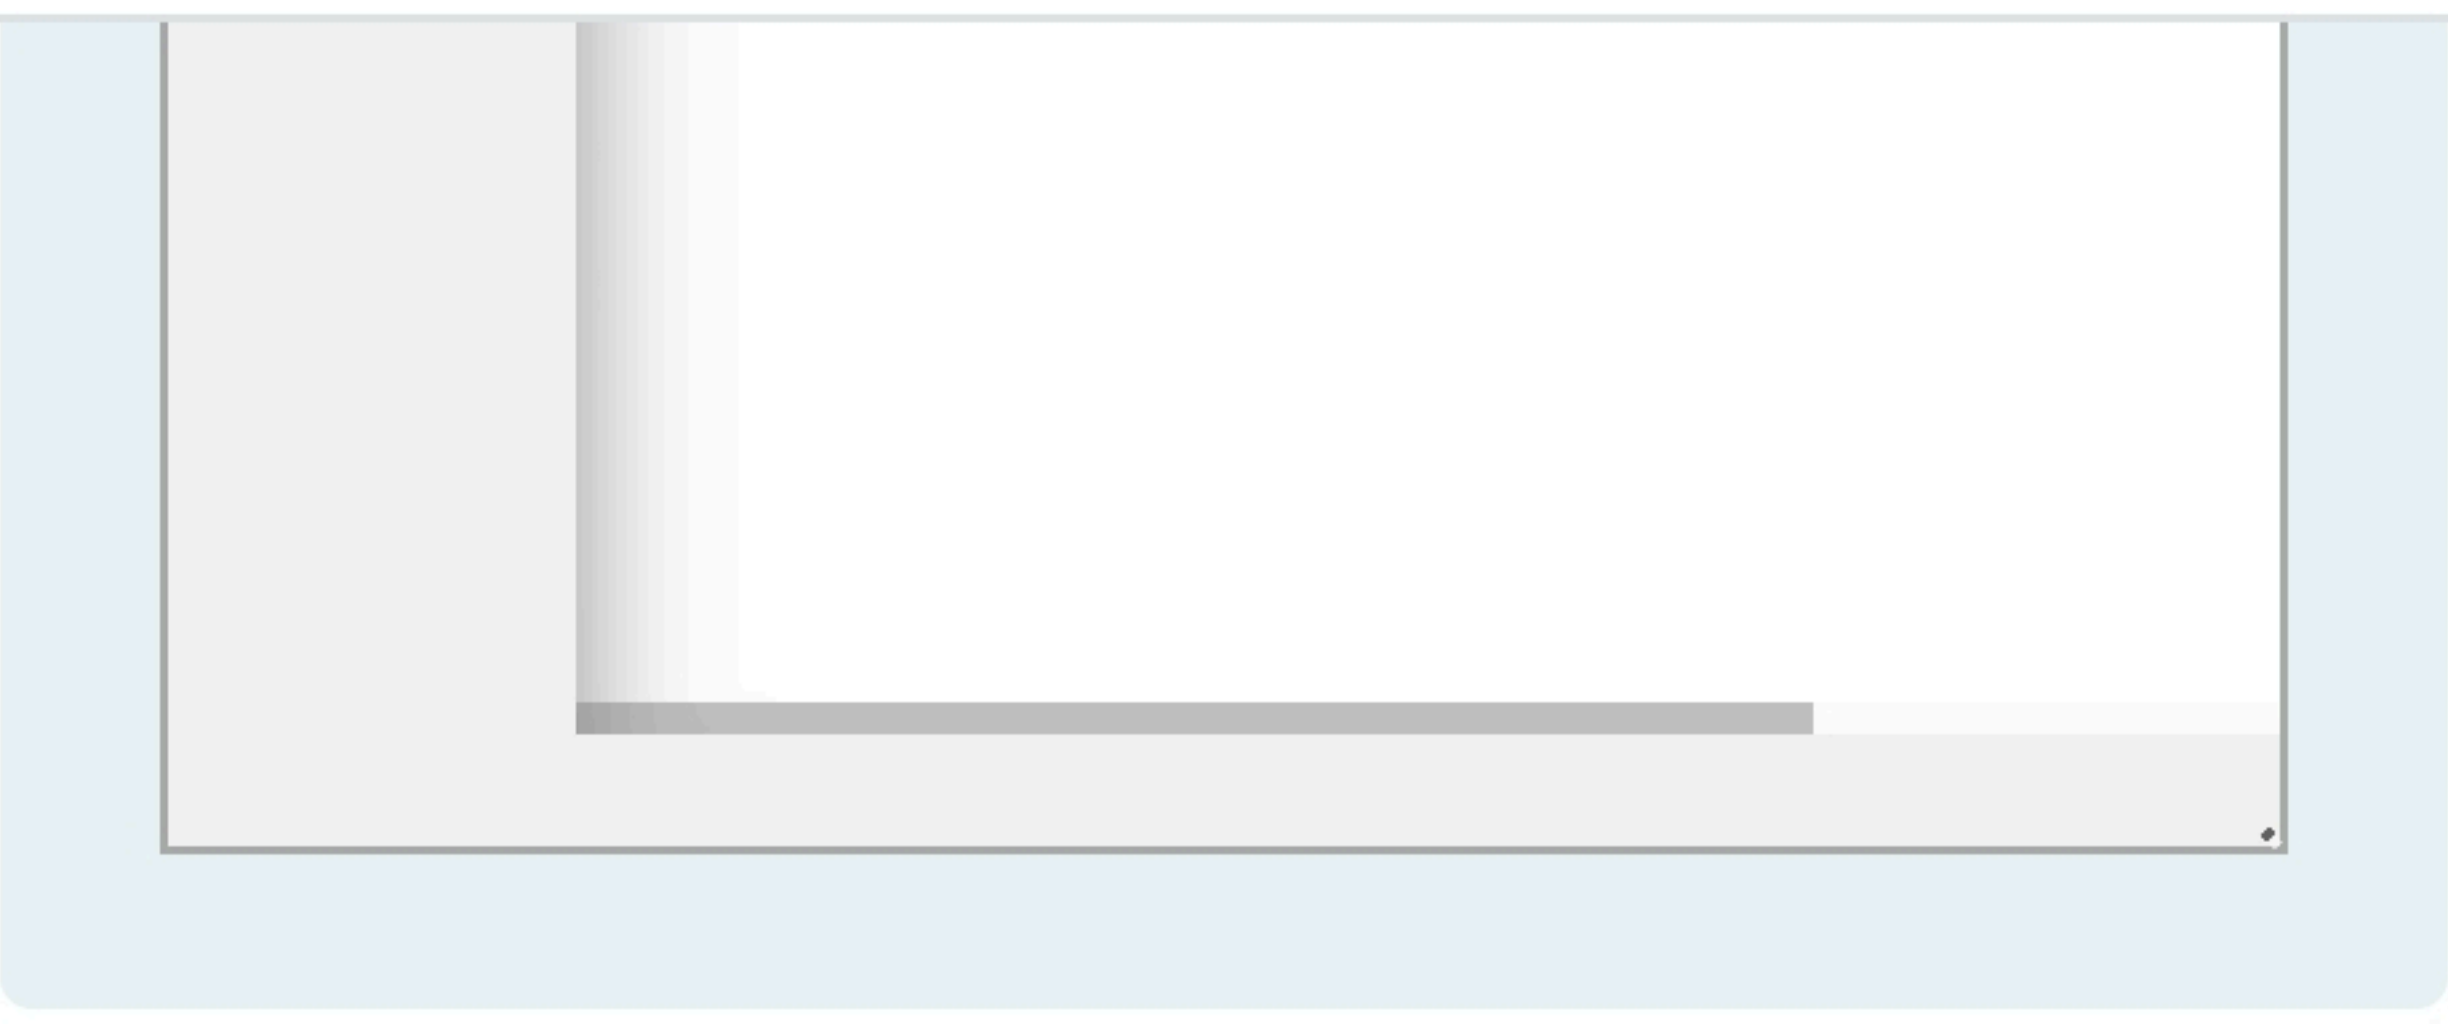

	Input	Expected	Got
✓	10 4 4.0 2.0	14 6 6.0 2.0	14 6 6.0 2.0
✓	20 8 8.0 4.0	28 12 12.0 4.0	28 12 12.0 4.0

Passed all tests! ✓

Finish review

Quiz navigation

- 1
- 2
- 3

Show one page at a time

Finish review

Quiz navigation

1

2

3

Show one page at a time

Finish review

Status	Finished
Started	Monday, 23 December 2024, 5:33 PM
Completed	Saturday, 26 October 2024, 11:40 AM
Duration	58 days 5 hours

Question 1

Correct

Marked out of 3.00

Flag question

Write a program to input a name (as a single character) and marks of three tests as m1, m2, and m3 of a student considering all the three marks have been given in integer format.

Now, you need to calculate the average of the given marks and print it along with the name as mentioned in the output format section.

All the test marks are in integers and hence calculate the average in integer as well. That is, you need to print the integer part of the average only and neglect the decimal part.

Input format :

Line 1 : Name(Single character)

Line 2 : Marks scored in the 3 tests separated by single space.

Output format :

First line of output prints the name of the student.

Second line of the output prints the average mark.

Constraints

Marks for each student lie in the range 0 to 100 (both inclusive)

Sample Input 1 :

A
3 4 6

Sample Output 1 :

A
4

Sample Input 2 :

T
7 3 8

Sample Output 2 :

T
6

Answer: (penalty regime: 0 %)

```
1 #include<stdio.h>
2 int main()
3 {
4     char a;
5     scanf("%c",&a);
6     printf("%c\n",a);
7     int x,y,z;
8     scanf("%d %d %d",&x,&y,&z);
9     printf("%d",(x+y+z)/3);
10    return 0;
11 }
```

Answer: (penalty regime: 0 %)

```
1 #include<stdio.h>
2 int main()
3 {
4     char a;
5     scanf("%c",&a);
6     printf("%c\n",a);
7     int x,y,z;
8     scanf("%d %d %d",&x,&y,&z);
9     printf("%d",(x+y+z)/3);
10    return 0;
11 }
```

	Input	Expected	Got	
✓	A 3 4 6	A 4	A 4	✓
✓	T 7 3 8	T 6	T 6	✓
✓	R 0 100 99	R 66	R 66	✓

Passed all tests! ✓

Question **2**

Correct

Marked out of 5.00

Flag question

Some C data types, their format specifiers, and their most common bit widths are as follows:

- *Int* ("%d"): 32 Bit integer
- *Long* ("%ld"): 64 bit integer
- *Char* ("%c"): Character type
- *Float* ("%f"): 32 bit real value
- *Double* ("%lf"): 64 bit real value

Reading

To read a data type, use the following syntax:

scanf("`format\_specifier`, &val)

For example, to read a *character* followed by a *double*:

```
char ch;
double d;
scanf("%c %lf", &ch, &d);
```

For the moment, we can ignore the spacing between format specifiers.

Printing

To print a data type, use the following syntax:

printf("`format\_specifier`, val)

For example, to print a *character* followed by a *double*:

```
char ch = 'd';
double d = 234.432;
printf("%c %lf", ch, d);
```

Note: You can also use *cin* and *cout* instead of *scanf* and *printf*, however, if you are taking a million numbers as input and printing a million lines, it is faster to use *scanf* and *printf*.

Input Format

Input consists of the following space-separated values: *int*, *long*, *char*, *float*, and *double*, respectively.

Output Format

Print each element on a new line in the same order it was received as input. Note that the floating point value should be correct up to 3 decimal places and the double to 9 decimal places.

Sample Input

3 12345678912345 a 334.23 14049.30493

Sample Output

3

followed by *double 14049.30493*.

Answer: (penalty regime: 0 %)

```
1 #include<stdio.h>
2 int main()
3 {
4     int a;
5     long b;
6     char c;
7     float d;
8     double e;
9     scanf("%d %ld %c %f %lf",&a,&b,&c,&d,&e);
10    printf("%d\n%ld\n%c\n%.3f\n%.9lf\n",a,b,c,d,e);
11
12 }
```

	Input	Expected Output
✓	3 12345678912345 a 334.23 14049.30493	3 12345678912345 a 334.23 14049.30493

Passed all tests! ✓

Question **3**
Correct
Marked out of 7.00
[Flag question](#)

Write a program to print the **ASCII value** and the two adjacent characters of the given character.

Input

E

Output

69

D F

Answer: (penalty regime: 0 %)

```
1 #include<stdio.h>
2 int main()
3 {
4     char c;
5
6     scanf("%c",&c);
7     printf("%d\n",c);
8     printf("%c %c",c-1,c+1);
9     return 0;;
10
11 }
```

	Input	Expected	Got	
✓	E	69 D F	69 D F	✓

Passed all tests! ✓

Finish review



GE23131-Programming Using C-2024

Quiz navigation

- 1
- 2
- 3

Show one page at a time

Finish review

Question 1

Correct

Marked out of 3.00

Flag question

Status	Finished
Started	Monday, 23 December 2024, 5:33 PM
Completed	Wednesday, 6 November 2024, 11:29 AM
Duration	47 days 6 hours

Goki recently had a breakup, so he wants to have some more friends in his life. Goki has N people who he can be friends with, so he decides to choose among them according to their skills set $Y_i (1 \leq i \leq n)$. He wants atleast X skills in his friends. Help Goki find his friends.

INPUT

First line contains a single integer X - denoting the minimum skill required to be Goki's friend. Next line contains one integer Y - denoting the skill of the person

OUTPUT

Print if he can be friend with Goki. 'YES' (without quotes) if he can be friends with Goki else 'NO' (without quotes).

CONSTRAINTS

$1 \leq N \leq 1000000$

$1 \leq X, Y \leq 1000000$

SAMPLE INPUT 1

100 110

SAMPLE OUTPUT 1

YES

SAMPLE INPUT 2

100 90

SAMPLE OUTPUT 2

NO

Answer: (penalty regime: 0 %)

```
1 #include<stdio.h>
2 int main()
3 {
4     int X,Y;
5     scanf("%d",&X);
6     scanf("%d",&Y);
7     if(X<=Y){
8         printf("YES");
9     }
10    else{
11        printf("NO");
12    }
13    return 0;
14 }
15
```

	Input	Expected	Got	
✓	100 110	YES	YES	✓
✓	100 90	NO	NO	✓

Passed all tests! ✓

Question 2

Before the outbreak of corona virus to the world, a meeting

Question 2

Correct

Marked out of 5.00

Flag question

Before the outbreak of corona virus to the world, a meeting happened in a room in Wuhan. A person who attended that meeting had COVID-19 and no one in the room knew about it! So everyone started shaking hands with everyone else in the room as a gesture of respect and after meeting unfortunately everyone got infected! Given the fact that any two persons shake hand exactly once, Can you tell the total count of handshakes happened in that meeting? Say no to shakehands. Regularly wash your hands. Stay Safe.

Input Format

Read an integer N,the total number of people attended that meeting.

Output Format

Print the number of handshakes.

Constraints

0 < N < 106

SAMPLE INPUT 1

1

SAMPLE OUTPUT

0

SAMPLE INPUT 2

2

SAMPLE OUTPUT 2

1

Explanation Case 1: The lonely board member shakes no hands, hence 0. Case 2: There are 2 board members, 1 handshake takes place.

Answer: (penalty regime: 0 %)

```
1 #include<stdio.h>
2 int main()
3 {
4     int N;
5     scanf("%d",&N);
6     printf("%d",(N*(N-1)/2));
7     return 0;
8 }
```

	Input	Expected	Got	
✓	1	0	0	✓
✓	2	1	1	✓

Passed all tests! ✓

Question 3

Correct

Marked out of 7.00

Flag question

In our school days, all of us have enjoyed the Games period. Raghav loves to play cricket and is Captain of his team. He always wanted to win all cricket matches. But only one last Games period is left in school now. After that he will pass out from school. So, this match is very important to him. He does not want to lose it. So he has done a lot of planning to make sure his teams wins. He is worried about only one opponent - Jatin, who is very good batsman. Raghav has figured out 3 types of bowling techniques, that could be most beneficial for dismissing Jatin. He has given points to each of the 3 techniques. You need to tell him which is the maximum point value, so that Raghav can select best technique. 3 numbers are given in input. Output the maximum of these numbers.

Input:

Three space separated integers.

Output:

Maximum integer value

```
7 | return 0;  
8 | }
```

	Input	Expected	Got	
✓	1	0	0	✓
✓	2	1	1	✓

Passed all tests! ✓

Question 3

Correct

Marked out of 7.00

Flag question

In our school days, all of us have enjoyed the Games period. Raghav loves to play cricket and is Captain of his team. He always wanted to win all cricket matches. But only one last Games period is left in school now. After that he will pass out from school. So, this match is very important to him. He does not want to lose it. So he has done a lot of planning to make sure his teams wins. He is worried about only one opponent - Jatin, who is very good batsman. Raghav has figured out 3 types of bowling techniques, that could be most beneficial for dismissing Jatin. He has given points to each of the 3 techniques. You need to tell him which is the maximum point value, so that Raghav can select best technique. 3 numbers are given in input. Output the maximum of these numbers.

Input:

Three space separated integers.

Output:

Maximum integer value

SAMPLE INPUT

8 6 1

SAMPLE OUTPUT

8

Explanation Out of given numbers, 8 is maximum.

Answer: (penalty regime: 0 %)

```
1 | #include<stdio.h>  
2 | int main()  
3 | {  
4 |     int a,b,c;  
5 |     scanf("%d%d%d",&a,&b,&c);  
6 |     if((a>b)&&(a>c))  
7 |         printf("%d",a);  
8 |     else if((b>a)&&(b>c))  
9 |         printf("%d",b);  
10 |    else  
11 |        printf("%d",c);  
12 |    return 0;  
13 | }  
14 |
```

	Input	Expected	Got	
✓	81 26 15	81	81	✓

Passed all tests! ✓

Finish review

REC-CIS

GE23131-Programming Using C-2024

Quiz navigation

1

2

3

Show one page at a time

Finish review

Status	Finished
Started	Monday, 23 December 2024, 5:33 PM
Completed	Saturday, 9 November 2024, 12:48 PM
Duration	44 days 4 hours

Question **1**

Correct

Marked out of 3.00

 Flag question

Many people think about their height in feet and inches, even in some countries that primarily use the metric system. Write a program that reads a number of feet from the user, followed by a number of inches. Once these values are read, your program should compute and display the equivalent number of centimeters.

Hint:

One foot is 12 inches.

One inch is 2.54 centimeters.

Input Format

First line,read the number of feet.

Second line, read the number of inches.

Output Format

In one line print the height in centimeters.

Note: All of the values should be displayed using two decimal places.

Sample Input 1

5 6

Sample Output 1

167.64

Answer: (penalty regime: 0 %)

```
1 #include<stdio.h>
2 int main()
3 {
4     int a,b;
5     float c;
6     scanf("%d%d",&a,&b);
7     c=(12*a*2.54)+(b*2.54);
8     printf("%.2f",c);
9     return 0;
10 }
```

	Input	Expected	Got	
✓	5 6	167.64	167.64	✓

Passed all tests! ✓

Question **2**

Correct

Marked out of 5.00

 Flag question

Create a program that reads two integers, a and b, from the user. Your program should compute and display: • The sum of a and b • The difference when b is subtracted from a • The product of a and b • The quotient when a is divided by b • The remainder when a is divided by b

Input Format

First line, read the first number.

Second line, read the second number.

Output Format



	Input	Expected	Got	
✓	5	167.64	167.64	✓
	6			

Passed all tests! ✓

Question 2

Correct

Marked out of 5.00

Flag question

Create a program that reads two integers, a and b, from the user. Your program should compute and display:

- The sum of a and b
- The difference when b is subtracted from a
- The product of a and b
- The quotient when a is divided by b
- The remainder when a is divided by b

Input Format

First line, read the first number.

Second line, read the second number.

Output Format

First line, print the sum of a and b

Second line, print the difference when b is subtracted from a

Third line, print the product of a and b

Fourth line, print the quotient when a is divided by b

Fifth line, print the remainder when a is divided by b

Sample

Input 1 100 6

Sample Output

106 94 600 16 4

Answer: (penalty regime: 0 %)

```
1 #include<stdio.h>
2 int main()
3 {
4     int a,b;
5     scanf("%d%d",&a,&b);
6     printf("%d\n%d\n%d\n%d\n%d",a+b,a-b,a*
7         return 0;
8 }
```

	Input	Expected	Got	
✓	100	106	106	✓
	6	94	94	
		600	600	
		16	16	
		4	4	

Passed all tests! ✓

Question 3

Incorrect

Marked out of 7.00

Flag question

A bakery sells loaves of bread for \$3.49 each. Day old bread is discounted by 60 percent. Write a program that begins by reading the number of loaves of day old bread being purchased from the user. Then your program should display the regular price for the bread, the discount because it is a day old, and the total price. Each of these amounts should be displayed on its own line with an appropriate label. All of the values should be displayed using two decimal places.

Input Format

Read the number of day old loaves.

Output Format

First line, print Regular price: price

Second line, print Discount: discount

Third line, print Total: total

Note: All of the values should be displayed using two