

## สิ่งที่ทำสำเร็จ

สิ่งที่ทำสำเร็จก็จะมีระบบการทำlogin และ logout โดยระบบ login

นั้นจะมีการตรวจสอบว่าใครเป็นAdmin หรือสมาชิก และบุคคลทั่วไปที่มาดูหน้าwebpage โดยจะมีการมองเห็นMenu ที่ต่างกันออกไป และการทำให้ สิทธิ์ของAdmin โดยที่Adminจะสามารถ insert,delete, update : User ได้ และUserก็สามารถแก้ไขข้อมูลตัวเองได้นั่นเอง

มีการใส่ข้อมูลส่วนตัว แนะนำสถานที่ท่องเที่ยว มีการทำระบบ Northwind ที่เชื่อมตารางทั้ง 8 ไว้

มีการกำหนดheader และ footer ในทุกๆหน้าเพื่อเพิ่มความสวยงาม และเป็นระเบียบ

มีการใช้Css ในการออกแบบหน้าเว็บให้มีความสวยงาม และน่าชม มีการใส่รูปภาพและเขียนบรรยายในหน้าต่างๆสุดท้ายนี้มีการใส่ ผลงาน pyramid ที่ข้าพเจ้าได้จัดทำในภาคการศึกษานี้ด้วย

โดยในเมนูที่ข้าพเจ้าได้จัดทำมีการใช้รูปแบบDropDownButton

## Code หน้า Login

```
<?php include("header1.php"); ?>
```

```
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
```

```
<form action="check_login.php" name="frmAdd" method="post">
```

```
<br>
```

```
<br>
```

```
<center><table width="284" border="1" >
```

```
<tr>
```

```
<th colspan="2" align="center">Login Form</th>
```

```
</tr>
```

```
<tr>
```

```
<th width="120">Username</th>
```

```
<td><input type="text" name="txtname" size="20"></td>
```

```
</tr>
```

```
<tr>
```

```
<th width="120">Password</th>
```

```
<td><input type="text" name="txtpass" size="20"></td>
```

```
</tr>
```

```
<tr>
```

```
<td colspan="2" align="center"> <input type="submit" name="submit" value="submit"></td>
```

```
</tr>
```

```
</table></center>
```

```
</form>
```

```
<?php include("footer1.php"); ?>
```

## Code Logout

```
<?php
```

```
    session_start();
```

```
    session_destroy();
```

```
    header("location:login.php");
```

```
?>
```

|         |           |          |                    |              |               |               |               |        |            |
|---------|-----------|----------|--------------------|--------------|---------------|---------------|---------------|--------|------------|
| Aboutme | northwind | Add User | สถานที่ท่องเที่ยว▼ | Pyramid1-10▼ | Pyramid11-20▼ | Pyramid21-30▼ | Pyramid31-36▼ | Logout | แสดงข้อมูล |
|---------|-----------|----------|--------------------|--------------|---------------|---------------|---------------|--------|------------|

| ตารางข้อมูล   |         |        |                |      |           |               |                       |        |      |        |
|---------------|---------|--------|----------------|------|-----------|---------------|-----------------------|--------|------|--------|
| Table1 Member |         |        |                |      |           |               |                       |        |      |        |
| ID            | User    | Pass   | เลขบัตรประชาชน | เพศ  | ชื่อ-สกุล | เบอร์โทรศัพท์ | อีเมล                 | Status | Edit | Delete |
| 9             | fearn89 | 123456 | 1509966002999  | หญิง | suwatjane | 0987646992    | fearn@hotmail.com     | 2      | Edit | Delete |
| 8             | root    | 123456 | 1509966002999  | หญิง | suwatjane | 0987646992    | Fearn-a27@hotmail.com | 1      | Edit | Delete |
| 10            | aaaa    | 111111 | 1509966002999  | ชาย  | fearnnn   | 0987646992    | fearn@hotmail.com     | 1      | Edit | Delete |

| Table2 Address |            |         |              |     |      |          |         |              |
|----------------|------------|---------|--------------|-----|------|----------|---------|--------------|
| ID             | บ้านเลขที่ | หมู่ที่ | ชื่อหมู่บ้าน | ถนน | ตำบล | อำเภอ    | จังหวัด | รหัสไปรษณีย์ |
| 9              | 11         | 1       | -            | -   | ป่า  | ป่า      | น่าน    | 55120        |
| 8              | 111        | 2       | -            | aa  | ป่า  | ไชยวัฒนา | น่าน    | 55120        |
| 10             | 1          | 1       | 2            |     |      |          |         |              |

Code insert

```

<?php

$servername = "localhost";

$username = "root";

$password = "";

$dbname = " f-products";

$conn = mysqli_connect($servername, $username, $password, $dbname);

mysqli_set_charset($conn,'UTF8');

$sql1 = "INSERT INTO member(id,user, pass, pin, sex, fname, phone, email,status)

VALUES

('",".$_POST["txtuser"].",".$_POST["txtpass"].",".$_POST["txtpin"].",".$_POST["txtsex"].",".$_
POST["txtname"].",".$_POST["txtphone"].",".$_POST["txtemail"].",".$_POST["txtsex"].",".$_

```

```
$sql2 = "INSERT INTO address (aid, ahouse_nb, agroup, anvillage, aroad, adistrict, acanton,
aprovince, apostal_code)
```

```
VALUES
```

```
(",$_POST["txthouse_nb"].",".$_POST["txtgroup"].",".$_POST["txtnvillage"].",".$_POST["txtroad"].",".
".$_POST["txtdistrict"].",
".$_POST["txtcanton"].",".$_POST["txtprovince"].",".$_POST["txtpostal_code"].")";
```

```
$objQuery = mysqli_query($conn,$sql1);
```

```
$objQuery = mysqli_query($conn,$sql2);
```

```
include("select.php");
```

```
?>
```

## Code Delete

```
<?php ?>
```

```
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
```

```
<TABLE align="center" width="624" height="800" border="1">
```

```
<?php
```


```
ini_set('display_errors', 1);
```

```
error_reporting(~0);
```

```
$serverName = "127.0.0.1";
```

```
$userName = "root";
```

```
$userPassword = "";
```

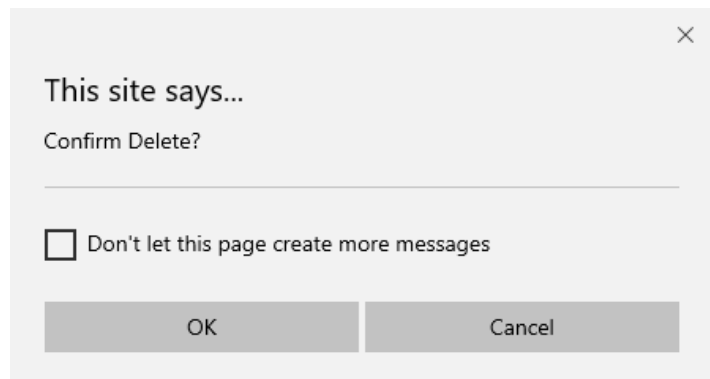

```
$dbName = " f-products ";

$conn = mysqli_connect($serverName,$userName,$userPassword,$dbName);

mysqli_set_charset($conn,'UTF8');

$deletetb = $_GET["id"];

$sql = "DELETE FROM member

        WHERE id = '". $deletetb. "' ";

$deletetb2 = $_GET["id"];

$sql2 = "DELETE FROM address

        WHERE aid = '". $deletetb2. "' ";

$query = mysqli_query($conn,$sql);

$query2 = mysqli_query($conn,$sql2);

mysqli_close($conn);

{

include ("select.php");

}

?>
```

## Code Edit

```
<?php include("header1.php"); ?>
```

```
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
```

```
<TABLE align="center" width="624"
```

```
height="100" border="1">
```

```
<?php
```

```
$serverName = "127.0.0.1";
```

```
$userName = "root";
```

```
$userPassword = "123456";
```

```
$dbName = "tom";
```

```
$conn = mysqli_connect($serverName,$userName,$userPassword,$dbName);
```

```
$sql1 = "SELECT * FROM member WHERE id=".$_GET['id'];
```

```
$sql2 = "SELECT * FROM address WHERE aid=".$_GET['id'];
```

```
mysqli_set_charset($conn,'UTF8');
```


```
$query1 = mysqli_query($conn,$sql1);
```

```
$query2 = mysqli_query($conn,$sql2);
```

```
$result1=mysqli_fetch_array($query1,MYSQLI_ASSOC);
```

```
$result2=mysqli_fetch_array($query2,MYSQLI_ASSOC);
```

```
?>
```

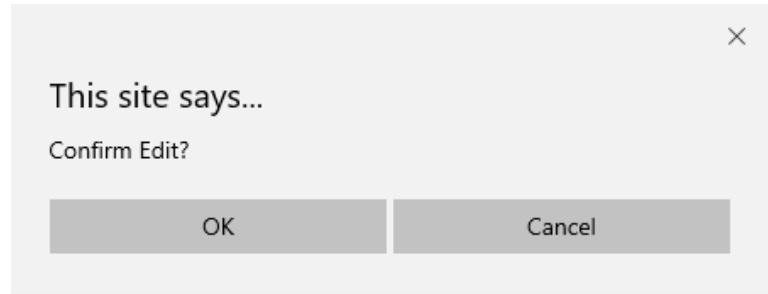

```
<form action="Sedit.php" name="sedit" method="post">
```

```
<Center><h1> ព័ត៌មានអ្នកប្រើ </h1></Center>
```

```
<tr><th width="120">ID</th>
```

```
<td><input type="hidden" name="txtid" size="5" value="<?php echo $result1["id"];?>"><?php echo  
$result1["id"];?></td></tr>
```

```
<tr><th width="120">Status</th>
```

```
<td align="left" colspan="2">
```

```
<p><input class="w3-radio" type="radio" name="status" value="2" <?php if($result1["status"]=="2"){ echo  
"checked"; } ?>>
```

```
<label>Admin</label></p>
```

```
<p><input class="w3-radio" type="radio" name="status" value="1" <?php if($result1["status"]=="1"){ echo  
"checked"; } ?>>
```

```
<label>User</label></p>
```

```
</td>
```

```
</tr>
```

```
<tr><th width="120">Username</th>
```

```
<td><input type="text" name="txtuser" size="50" value="<?php echo $result1["user"];?>"></td></tr>
```

```
<tr><th width="120">Password</th>
```

```
<td><input type="text" name="txtpass" size="50" value="<?php echo $result1["pass"];?>"></td></tr>
```



```
<tr><th width="120">Pin</th>
```

```
<td><input type="text" name="txtpin" size="50" minlength="13" maxlength="13" value="<?php echo  
$result1["pin"];?>"></td></tr>
```

```
<tr><th width="120">Sex</
```

```
<tr>
```

```
<td align="left" colspan="2">
```

```
<p><input class="w3-radio" type="radio" name="sex" value="ชาย" <?php if($result1["sex"]=="ชาย"){ echo  
"checked"; } ?>>
```

```
<label>ชาย</label></p>
```

```
<p><input class="w3-radio" type="radio" name="sex" value="หญิง" <?php if($result1["sex"]=="หญิง"){  
echo "checked"; } ?>>
```

```
<label>หญิง</label></p>
```

```
</td>
```

```
</tr>
```

```
<tr> <th width="120">Name</th>
```

```
<td><input type="text" name="txtname" size="50" value="<?php echo $result1["fname"];?>"></td></tr>
```

```
<tr><th width="120">Phone</th>
```

```
<td><input type="text" name="txtphone" size="50" maxlength="10" value="<?php echo  
$result1["phone"];?>"></td></tr>
```

```
<tr><th width="120">Email</th>

<td><input type="Email" name="txtemail" size="50" value="<?php echo $result1["email"];?>"></td></tr>

<tr><th width="120">บ้านเลขที่</th>

<td><input type="text" name="txthouse_nb" size="50" value="<?php echo
$result2["ahouse_nb"];?>"></td></tr>

<tr> <th width="120">หมู่ที่</th>

<td><input type="text" name="txtgroup" size="50" value="<?php echo $result2["agroup"];?>"></td></tr>

<tr><th width="120">หมู่บ้าน</th>

<td><input type="text" name="txtnvillage" size="50" value="<?php echo
$result2["anvillage"];?>"></td></tr>

<tr><th width="120">ถนน</th>

<td><input type="text" name="txtroad" size="50" value="<?php echo $result2["aroad"];?>"></td></tr>

<tr><th width="120">อำเภอ</th>

<td><input type="text" name="txtdistrict" size="50" value="<?php echo
$result2["adistrict"];?>"></td></tr>

<tr><th width="120">ตำบล</th>

<td><input type="text" name="txtcanton" size="50" value="<?php echo
$result2["acanton"];?>"></td></tr>

<tr><th width="120">จังหวัด</th>
```

```
<td><input type="text" name="txtprovince" size="50" value="<?php echo  
$result2["aprovince"];?>"></td></tr>
```

```
<tr><th width="120">รหัสไปรษณีย์</th>
```

```
<td><input type="text" name="txtpostal_code" size="50" value="<?php echo  
$result2["apostal_code"];?>"></td></tr>
```

```
</TABLE>
```

```
<center><input type="submit" name="submit" value="Submit"> </center>
```

```
<?php include("footer1.php"); ?>
```

| Table                                 | Action                                      | Rows | Type   | Collation         | Size     | Overhead |
|---------------------------------------|---|------|--------|-------------------|----------|----------|
| <input type="checkbox"/> address      | ★ Browse Structure Search Insert Empty Drop | 4    | InnoDB | latin1_swedish_ci | 16 KiB   | -        |
| <input type="checkbox"/> categories   | ★ Browse Structure Search Insert Empty Drop | 2    | MyISAM | latin1_swedish_ci | 1.2 KiB  | -        |
| <input type="checkbox"/> customers    | ★ Browse Structure Search Insert Empty Drop | 2    | MyISAM | latin1_swedish_ci | 1.3 KiB  | -        |
| <input type="checkbox"/> employees    | ★ Browse Structure Search Insert Empty Drop | 2    | MyISAM | latin1_swedish_ci | 1.3 KiB  | -        |
| <input type="checkbox"/> member       | ★ Browse Structure Search Insert Empty Drop | 4    | InnoDB | latin1_swedish_ci | 16 KiB   | -        |
| <input type="checkbox"/> orderdetails | ★ Browse Structure Search Insert Empty Drop | 2    | MyISAM | latin1_swedish_ci | 1.3 KiB  | -        |
| <input type="checkbox"/> orders       | ★ Browse Structure Search Insert Empty Drop | 2    | MyISAM | latin1_swedish_ci | 1.3 KiB  | -        |
| <input type="checkbox"/> producttest  | ★ Browse Structure Search Insert Empty Drop | 2    | MyISAM | latin1_swedish_ci | 1.3 KiB  | -        |
| <input type="checkbox"/> shippers     | ★ Browse Structure Search Insert Empty Drop | 2    | MyISAM | latin1_swedish_ci | 1.2 KiB  | -        |
| <input type="checkbox"/> suppliers    | ★ Browse Structure Search Insert Empty Drop | 2    | MyISAM | latin1_swedish_ci | 1.3 KiB  | -        |
| 10 tables                             | Sum   | 24   | InnoDB | latin1_swedish_ci | 42.3 KiB | 0 B      |

## Products

### Create

```
<?php include("header1.php"); ?>
```

```
<?php
```

```
if(file_exists("pro_slconnect.php"))
```

```
    require("pro_slconnect.php");
```

```
else
```

```
    die("File not found");
```

```
if ($dbstatus == 0) dbWork("create database $db");
```

```
qWork("create table $tb (PID char(4),Pname char(40),SupID char(40),QPU char(40),UP char(40))");
```

```
if((int)phpversion() >= 7) $connect->close(); else mysql_close($connect);
```

```
echo '<a href="pro_s0index.php">back</a>';
```

```

function dbWork($sql) {

    global $db,$host,$uname,$upass,$connect;

    if((int)phpversion() >= 7) {

        if ($connect->query($sql) === FALSE)

            echo "$sql : failed ". $conn->error . "<br/>";

        else {

            echo "$sql : succeeded<br/>";

            $connect = new mysqli($host, $uname, $upass, $db);

        }

    } else {

        if (!$result=mysqli_query($sql,$connect))

            echo "$sql : failed<br/>";

        else

            echo "$sql : succeeded<br/>";

    }

}

function qWork($sql) {

    global $connect,$db;

```

```

if((int)phpversion() >= 7) {

    if ($connect->query($sql) === FALSE)

        echo "$sql : failed ". $conn->error . "<br/>";

    else

        echo "$sql : succeeded<br/>";

} else {

    if (!$result=mysql_db_query($db,$sql))

        echo "$sql : failed<br/>";

    else

        echo "$sql : succeeded<br/>";

}

}

?>

<?php include("footer1.php"); ?>

```

## Select

```

<?php

require("pro_slconnect.php");

$sql="select * from productsTest";

```

```

if((int)phpversion() >= 7) {

    $result = $connect->query($sql);

    if ($result->num_rows > 0) {

        while($row = $result->fetch_assoc()) {

            echo "<center> id: " . $row["PID"]. "- PName: " . $row["Pname"]. "- SupID: " .
$row["SupID"]."- QPU: " . $row["QPU"]."- UP: " . $row["UP"]. "<br/>";

        }

    } else {

        echo "no results";

    }

    $connect->close();

} else {

    if (!$result=mysql_db_query($db,$sql)) die("Query : failed");

    echo "Display all records : <br/>";

    while ($object = mysql_fetch_object($result)) {

        echo $object->PID . " " . $object->Pname . "<br/>";

    }

    echo "Total " . mysql_num_rows($result) . " records";

    mysql_close($connect);

```

```
}
```

```
echo "<center><a href=pro_s0index.php>back</a>";
```

```
?>
```

## Insert

```
<?php include("header1.php"); ?>
```

```
<form action=pro_s4insert.php>
```

```
<input name=nid value=>
```

```
<input name=nname value=>
```

```
<input name=sup value=>
```

```
<input name=qpu value=>
```

```
<input name=up value=>
```

```
<input type=submit value=s4insert.php>
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['nid']) || !isset($_GET['nname'])) exit;
```

```
require("pro_s1connect.php");
```

```
$sql="insert into $tb
```

```
values('".$_GET['nid']."','".$_GET['nname']."','".$_GET['sup']."','".$_GET['qpu']."','".$_GET['up']."')";
```

```
if((int)phpversion() >= 7) {
```



```
if($connect->query($sql) === FALSE)

    echo "$sql : failed";

else

    echo "$sql : succeeded";

$connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : failed";

    else

        echo "$sql : succeeded";

    mysql_close($connect);

}

?>
```

```
<?php include("footer1.php"); ?>
```

## **Delete**

```
<?php include("header1.php"); ?>
```

```
<?php
```

```
$myForm = '<body>

<form action="pro_s5delete.php">

<input name="delid" value="1001">

<input type="submit" value="pro_s5delete.php">

</form>';

if (!isset($_GET['delid'])) {

    echo $myForm;

    exit;

}

require("pro_s1connect.php");

$sql="delete from $tb ";

$sql.="where PID='".$_GET['delid']."'";

if((int)phpversion() >= 7) {

    if($connect->query($sql) === FALSE)

        echo "$sql : failed";

    else

        header("location: pro_s0index.php");

    $connect->close();
```

```
} else {  
  
    if(!$result=mysql_db_query($db,$sql))  
  
        echo "$sql : failed";  
  
    else  
  
        header("location: pro_s0index.php");  
  
    mysql_close($connect);  
  
}  
  
?>
```

```
<?php include("footer1.php"); ?>
```

## Update

```
<?php include("header1.php"); ?>
```

```
<form action="pro_s6update.php">
```

```
<input name="id" value="">
```

```
<input name="name" value="">
```

```
<input name="sup" value="">
```

```
<input name="qpu" value="">
```

```
<input name="up" value="">
```

```
<input type="submit" value="s6update.php">
```

</form>

<?php

if (!isset(\$\_GET['id'])) { exit; }

require("pro\_slconnect.php");

\$sql.="update productsTest set ";

\$sql.="PID =". \$\_GET['id'] .", ";

\$sql.="Pname =". \$\_GET['name'] .", ";

\$sql.="SupID =". \$\_GET['sup'] .", ";

\$sql.="QPU =". \$\_GET['qpu'] .", ";

\$sql.="UP =". \$\_GET['up'] .", ";

\$sql.="where PID =". \$\_GET['id'] ."";

if((int)phpversion() >= 7) {

if(\$connect->query(\$sql) === FALSE)

echo "\$sql : failed";

else

echo "<meta http-equiv='refresh' content='0; url=pro\_s0index.php'/>";

\$connect->close();

} else {

```

        if(!$result=mysql_db_query($db,$sql))

            echo "$sql : True";

        else

            echo "<meta http-equiv='refresh' content='0; url=pro_s0index.php'/>";

        mysql_close($connect);

    }

?>

<?php include("footer1.php"); ?>

```

## Drop

```

<?php include("header1.php"); ?>

<?php

require("s1connect.php");

$sql = "drop database $db";

if((int)phpversion() >= 7) {

    $connect->close();

    $connect = mysqli_connect($host, $uname, $upass);

    if (mysqli_query($connect, $sql))

        echo "Drop database : succeeded";

```

```
else

    echo "Drop database : failed " . mysqli_error($connect);

    $connect->close();

} else {

    if (!$result=mysqli_query($sql,$connect))

        echo "Drop database : failed";

    else

        echo "Drop database : succeeded";

    mysqli_close($connect);

}

?>

<input type='button' onclick="location.href='s0index.php'" value='back'>

<?php include("footer1.php"); ?>
```

## Customers

### Create

```
<?php include("header1.php"); ?>

<?php

if(file_exists("cus_slconnect.php"))

    require("cus_slconnect.php");

else

    die("File not found");

if ($dbstatus == 0) dbWork("create database $db");

qWork("create table $tb (cus char(4),company char(40),contact char(40),address char(40),phone char(40))");

if((int)phpversion() >= 7) $connect->close(); else mysql_close($connect);

echo '<a href="index.php">back</a>';

function dbWork($sql) {

    global $db,$host,$uname,$upass,$connect;

    if((int)phpversion() >= 7) {

        if ($connect->query($sql) === FALSE)

            echo "$sql : failed ". $conn->error . "<br/>";

        else {
```

```

        echo "$sql : succeeded<br/>";

        $connect = new mysqli($host, $uname, $upass, $db);

    }

} else {

    if (!$result=mysqli_query($sql,$connect))

        echo "$sql : failed<br/>";

    else

        echo "$sql : succeeded<br/>";

}

}

function qWork($sql) {

    global $connect,$db;

    if((int)phpversion() >= 7) {

        if ($connect->query($sql) === FALSE)

            echo "$sql : failed ". $conn->error . "<br/>";

        else

            echo "$sql : succeeded<br/>";

    } else {

```



```

        if (!$result=mysql_db_query($db,$sql))

            echo "$sql : failed<br/>";

        else

            echo "$sql : succeeded<br/>";

    }

}

?>

```

```

<?php include("footer1.php"); ?>

```

## Select

```

<?php

require("cus_slconnect.php");

$sql="select * from Customers";

if((int)phpversion() >= 7) {

    $result = $connect->query($sql);

    if ($result->num_rows > 0) {

        while($row = $result->fetch_assoc()) {

            echo "<center> id: " . $row["cusid"]. "- comName: " . $row["company"]. "- contact: " . $row["contact"]. "- address: " . $row["address"]. "- Phone: " . $row["phone"]. "<br/>";

```

```

        }

    } else {

        echo "no results";

    }

    $connect->close();

} else {

    if (!$result=mysql_db_query($db,$sql)) die("Query : failed");

    echo "Display all records : <br/>";

    while ($object = mysql_fetch_object($result)) {

        echo $object->PID . " " . $object->Pname . "<br/>";

    }

    echo "Total " . mysql_num_rows($result) . " records";

    mysql_close($connect);

}

echo "<center><a href=index.php>back</a>";

?>

```

## Insert

```
<?php include("header1.php"); ?>
```

```
<form action=cus_s4insert.php>
```

```
<input name=cusid value=>
```

```
<input name=comname value=>
```

```
<input name=con value=>
```

```
<input name=add value=>
```

```
<input name=phone value=>
```

```
<input type=submit value=cus_s4insert.php>
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['cusid']) || !isset($_GET['comname'])) exit;
```

```
require("cus_s1connect.php");
```

```
$sql="insert into $tb
```

```
values('".$_GET['cusid']."','".$_GET['comname']."','".$_GET['con']."','".$_GET['add']."','".$_GET['phone']."')
```

```
;
```

```
if((int)phpversion() >= 7) {
```

```
    if($connect->query($sql) === FALSE)
```

```
        echo "$sql : failed";
```

```
    else
```

```

        echo "$sql : succeeded";

        $connect->close();

    } else {

        if(!$result=mysql_db_query($db,$sql))

            echo "$sql : failed";

        else

            echo "$sql : succeeded";

        mysql_close($connect);

    }

?>

<?php include("footer1.php"); ?>

```

## Delete

```

<?php include("header1.php"); ?>

<?php

$myForm = '<body>

<form action="cus_s5delete.php">

<input name="delid" value=".....">

<input type="submit" value="cus_s5delete.php">

```

```
</form>';

if (!isset($_GET['delid'])) {

    echo $myForm;

    exit;

}

require("cus_slconnect.php");

$sql="delete from $tb ";

$sql.="where cus='".$_GET['delid']."'";

if((int)phpversion() >= 7) {

    if($connect->query($sql) === FALSE)

        echo "$sql : failed";

    else

        header("location: index.php");

    $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : failed";

    else
```

```
        header("location: index.php");

        mysql_close($connect);

    }

?>
```

```
<?php include("footer1.php"); ?>
```

## Update

```
<?php include("header1.php"); ?>
```

```
<form action="cus_s6update.php">
```

```
<input name="cusid" value="">
```

```
<input name="com" value="">
```

```
<input name="con" value="">
```

```
<input name="add" value="">
```

```
<input name="ph" value="">
```

```
<input type="submit" value="cus_s6update.php">
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['cusid'])) { exit; }
```

```
require("cus_slconnect.php");
```

```
$sql.="update Customers set ";
```

```
$sql.="cus='". $_GET['cusid'] ."', ";
```

```
$sql.="company='". $_GET['com'] ."', ";
```

```
$sql.="contact='". $_GET['con'] ."', ";
```

```
$sql.="address='". $_GET['add'] ."', ";
```

```
$sql.="phone='". $_GET['ph'] ."' ";
```

```
$sql.="where cus='". $_GET['cusid'] .'"''";
```

```
if((int)phpversion() >= 7) {
```

```
    if($connect->query($sql) === FALSE)
```

```
        echo "$sql : failed";
```

```
    else
```

```
        echo "<meta http-equiv='refresh' content='0; url=index.php'/>";
```

```
    $connect->close();
```

```
} else {
```

```
    if(!$result=mysql_db_query($db,$sql))
```

```
        echo "$sql : True";
```

```
    else
```

```
        echo "<meta http-equiv='refresh' content='0; url=index.php'/>";
```

```
mysql_close($connect);
```

```
}
```

```
?>
```

```
<?php include("footer1.php"); ?>
```

## **Drop**

```
<?php include("header1.php"); ?>
```

```
<?php
```

```
require("cus_slconnect.php");
```

```
$sql = "drop database $db";
```

```
if((int)phpversion() >= 7) {
```

```
    $connect->close();
```

```
    $connect = mysqli_connect($host, $uname, $upass);
```

```
    if (mysqli_query($connect, $sql))
```

```
        echo "Drop database : succeeded";
```

```
    else
```

```
        echo "Drop database : failed " . mysqli_error($connect);
```

```
    $connect->close();
```

```
} else {
```



```
if (!$result=mysql_query($sql,$connect))

    echo "Drop database : failed";

else

    echo "Drop database : succeeded";

mysql_close($connect);

}

?>

<input type='button' onclick="location.href='cus_s0index.php'" value='back'>

<?php include("footer1.php"); ?>
```

## Employees

### Create

```
<?php include("header1.php"); ?>

<?php

if(file_exists("emp_slconnect.php"))

    require("emp_slconnect.php");

else

    die("File not found");

if ($dbstatus == 0) dbWork("create database $db");

qWork("create table $tb (empid char(4),empname char(40),empbd char(40),empaddress char(40),empphone
char(40))");

if((int)phpversion() >= 7) $connect->close(); else mysql_close($connect);

echo '<a href="index.php">back</a>';

function dbWork($sql) {

    global $db,$host,$uname,$upass,$connect;

    if((int)phpversion() >= 7) {

        if ($connect->query($sql) === FALSE)

            echo "$sql : failed ". $conn->error . "<br/>";

        else {
```

```

        echo "$sql : succeeded <br/>";

        $connect = new mysqli($host, $uname, $upass, $db);

    }

} else {

    if (!$result=mysqli_query($sql,$connect))

        echo "$sql : failed<br/>";

    else

        echo "$sql : succeeded<br/>";

}

}

function qWork($sql) {

    global $connect,$db;

    if((int)phpversion() >= 7) {

        if ($connect->query($sql) === FALSE)

            echo "$sql : failed ". $conn->error . "<br/>";

        else

            echo "$sql : succeeded<br/>";

    } else {

```

```

        if (!$result=mysql_db_query($db,$sql))

            echo "$sql : failed<br/>";

        else

            echo "$sql : succeeded<br/>";

    }

}

?>

```

```

<?php include("footer1.php"); ?>

```

## Select

```

<?php

require("emp_slconnect.php");

$sql="select * from Employees";

if((int)phpversion() >= 7) {

    $result = $connect->query($sql);

    if ($result->num_rows > 0) {

        while($row = $result->fetch_assoc()) {

            echo "<center> id: " . $row["empid"]. "- empName: " . $row["empname"]. "-
empBD: " . $row["empbd"]. "- empaddress: " . $row["empaddress"]. "- empphone: " . $row["empphone"].
"<br/>";

```

```

<?php

require("emp_slconnect.php");

$sql="select * from Employees";

if((int)phpversion() >= 7) {

    $result = $connect->query($sql);

    if ($result->num_rows > 0) {

        while($row = $result->fetch_assoc()) {

            echo "<center> id: " . $row["empid"]. "- empName: " . $row["empname"]. "-
empBD: " . $row["empbd"]. "- empaddress: " . $row["empaddress"]. "- empphone: " . $row["empphone"].
"<br/>";

        }

    } else {

        echo "no results";

    }

    $connect->close();

} else {

    if (!$result=mysql_db_query($db,$sql)) die("Query : failed");

    echo "Display all records : <br/>";

    while ($object = mysql_fetch_object($result)) {

```

```

        echo $object->PID . " " . $object->Pname . "<br/>";

    }

    echo "Total " . mysql_num_rows($result) . " records";

    mysql_close($connect);

}

echo "<center><a href=index.php>back</a>";

?>

```

## Insert

```

<?php include("header1.php"); ?>

<form action=emp_s4insert.php>

<input name=empid value=>

<input name=empname value=>

<input name=empbd value=>

<input name=empadd value=>

<input name=empph value=>

<input type=submit value=emp_s4insert.php>

</form>

<?php

```

```

if (!isset($_GET['empid']) || !isset($_GET['empname'])) exit;

require("emp_slconnect.php");

$sql="insert into $tb
values('".$_GET['empid']. "','".$_GET['empname']. "','".$_GET['empbd']. "','".$_GET['empadd']. "','".$_GET['w
mpth']. "')";

if((int)phpversion() >= 7) {

    if($connect->query($sql) === FALSE)

        echo "$sql : failed";

    else

        echo "$sql : succeeded";

    $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : failed";

    else

        echo "$sql : succeeded";

    mysql_close($connect);

}

```

?>

<?php include("footer1.php"); ?>

## Delete

<?php include("header1.php"); ?>

<?php

\$myForm = '<body>

<form action="emp\_s5delete.php">

<input name="delid" value=".....">

<input type="submit" value="emp\_s5delete.php">

</form>';

if (!isset(\$\_GET['delid'])) {

    echo \$myForm;

    exit;

}

require("emp\_s1connect.php");

\$sql="delete from \$tb ";

\$sql.="where empid ='".\$\_GET['delid'].\"";

if((int)phpversion() >= 7) {



```
if($connect->query($sql) === FALSE)

    echo "$sql : failed";

else

    header("location: index.php");

$connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : failed";

    else

        header("location: index.php");

    mysql_close($connect);

}

?>
```

```
<?php include("footer1.php"); ?>
```

## **Update**

```
<?php include("header1.php"); ?>
```

```
<form action="emp_s6update.php">
```

```
<input name="empid" value="">
```

```
<input name="empname" value="">
```

```
<input name="empbd" value="">
```

```
<input name="empadd" value="">
```

```
<input name="empph" value="">
```

```
<input type="submit" value="emp_s6update.php">
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['empid'])) { exit; }
```

```
require("emp_s1connect.php");
```

```
$sql.="update Employees set ";
```

```
$sql.="empid =". $_GET['empid'] .", ";
```

```
$sql.="empname =". $_GET['empname'] .", ";
```

```
$sql.="empbd =". $_GET['empbd'] .", ";
```

```
$sql.="empaddress =". $_GET['empadd'] .", ";
```

```
$sql.="empphone =". $_GET['empph'] ."";
```

```
$sql.="where empid =". $_GET['empid'] ."";
```

```
if((int)phpversion() >= 7) {
```

```
    if($connect->query($sql) === FALSE)
```

```

        echo "$sql : failed";

    else

        echo "<meta http-equiv='refresh' content='0; url=index.php'/>";

        $connect->close();

    } else {

        if(!$result=mysql_db_query($db,$sql))

            echo "$sql : True";

        else

            echo "<meta http-equiv='refresh' content='0; url=index.php'/>";

            mysql_close($connect);

    }

?>

```

```

<?php include("footer1.php"); ?>

```

## Drop

```

<?php include("header1.php"); ?>

```

```

<?php

```

```

require("emp_slconnect.php");

```

```

$sql = "drop database $db";

```

```

if((int)phpversion() >= 7) {

    $connect->close();

    $connect = mysqli_connect($host, $uname, $upass);

    if (mysqli_query($connect, $sql))

        echo "Drop database : succeeded";

    else

        echo "Drop database : failed " . mysqli_error($connect);

    $connect->close();

} else {

    if (!$result=mysqli_query($sql,$connect))

        echo "Drop database : failed";

    else

        echo "Drop database : succeeded";

    mysqli_close($connect);

}

?>

<input type='button' onclick="location.href='emp_s0index.php'" value='back'>

<?php include("footer1.php"); ?>

```

## Orders

### Craate

```
<?php include("header1.php"); ?>
```

```
<?php
```

```
if(file_exists("ord_slconnect.php"))
```

```
    require("ord_slconnect.php");
```

```
else
```

```
    die("File not found");
```

```
if ($dbstatus == 0) dbWork("create database $db");
```

```
qWork("create table $tb (ordid char(4),cusid char(40),empid char(40),orddate char(40),ship char(40))");
```

```
if((int)phpversion() >= 7) $connect->close(); else mysql_close($connect);
```

```
echo '<a href="ord_s0index.php">back</a>';
```

```
function dbWork($sql) {
```

```
    global $db,$host,$uname,$upass,$connect;
```

```
    if((int)phpversion() >= 7) {
```

```
        if ($connect->query($sql) === FALSE)
```

```
            echo "$sql : failed ". $conn->error . "<br/>";
```

```
        else {
```

```

        echo "$sql : succeeded<br/>";

        $connect = new mysqli($host, $uname, $upass, $db);

    }

} else {

    if (!$result=mysqli_query($sql,$connect))

        echo "$sql : failed<br/>";

    else

        echo "$sql : succeeded<br/>";

}

}

function qWork($sql) {

    global $connect,$db;

    if((int)phpversion() >= 7) {

        if ($connect->query($sql) === FALSE)

            echo "$sql : failed ". $conn->error . "<br/>";

        else

            echo "$sql : succeeded<br/>";

    } else {

```

```

        if (!$result=mysql_db_query($db,$sql))

            echo "$sql : failed<br/>";

        else

            echo "$sql : succeeded<br/>";

    }

}

?>

```

```

<?php include("footer1.php"); ?>

```

## Select

```

<?php

require("ord_slconnect.php");

$sql="select * from Orders";

if((int)phpversion() >= 7) {

    $result = $connect->query($sql);

    if ($result->num_rows > 0) {

        while($row = $result->fetch_assoc()) {

            echo "<center> idord: " . $row["ordid"]. "- cusid: " . $row["cusid"]. "- empid: " .
            $row["empid"]."- orddate: " . $row["orddate"]."- ship: " . $row["ship"]. "<br/>";

        }

    }

}

```

```

    } else {

        echo "no results";

    }

    $connect->close();

} else {

    if (!$result=mysql_db_query($db,$sql)) die("Query : failed");

    echo "Display all records : <br/>";

    while ($object = mysql_fetch_object($result)) {

        echo $object->PID . " " . $object->Pname . "<br/>";

    }

    echo "Total " . mysql_num_rows($result) . " records";

    mysql_close($connect);

}

echo "<center><a href=index.php>back</a>";

?>

```

## Insert

```
<?php include("header1.php"); ?>
```



```
<form action=ord_s4insert.php>
```

```
<input name=ordid value=>
```

```
<input name=cusid value=>
```

```
<input name=empid value=>
```

```
<input name=orddate value=>
```

```
<input name=ship value=>
```

```
<input type=submit value=ord_s4insert.php>
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['ordid']) || !isset($_GET['cusid'])) exit;
```

```
require("ord_s1connect.php");
```

```
$sql="insert into $tb
```

```
values('".$_GET['ordid']."','".$_GET['cusid']."','".$_GET['empid']."','".$_GET['orddate']."','".$_GET['ship']."")"
```

```
;
```

```
if((int)phpversion() >= 7) {
```

```
    if($connect->query($sql) === FALSE)
```

```
        echo "$sql : failed";
```

```
    else
```

```
        echo "$sql : succeeded";
```

```

        $connect->close();

    } else {

        if(!$result=mysql_db_query($db,$sql))

            echo "$sql : failed";

        else

            echo "$sql : succeeded";

        mysql_close($connect);

    }

?>

```

```

<?php include("footer1.php"); ?>

```

## Delete

```

<?php include("header1.php"); ?>

```

```

<?php

```

```

$myForm = '<body>

```

```

<form action="ord_s5delete.php">

```

```

<input name="delid" value=".....">

```

```

<input type="submit" value="ord_s5delete.php">

```

```

</form>';

```

```
if (!isset($_GET['delid'])) {

    echo $myForm;

    exit;

}

require("ord_slconnect.php");

$sql="delete from $tb ";

$sql.="where ordid='".$_GET['delid']."'";

if((int)phpversion() >= 7) {

    if($connect->query($sql) === FALSE)

        echo "$sql : failed";

    else

        header("location: index.php");

    $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : failed";

    else

        header("location: index.php");
```

```
mysql_close($connect);
```

```
}
```

```
?>
```

```
<?php include("footer1.php"); ?>
```

## Update

```
<?php include("header1.php"); ?>
```

```
<form action="ord_s6update.php">
```

```
<input name="ordide" value="">
```

```
<input name="cusid" value="">
```

```
<input name="empid" value="">
```

```
<input name="orddate" value="">
```

```
<input name="ship" value="">
```

```
<input type="submit" value="ord_s6update.php">
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['ordide'])) { exit; }
```

```
require("ord_slconnect.php");
```

```
$sql.="update Orders set ";
```

```

$sql.="ordid='". $_GET['ordide'] .'", ";

$sql.="cusid='". $_GET['cusid'] .'", ";

$sql.="empid='". $_GET['empid'] .'", ";

$sql.="orddate='". $_GET['orddate'] .'", ";

$sql.="ship='". $_GET['ship'] .'" ";

$sql.="where ordid='". $_GET['ordide'] .""";

if((int)phpversion() >= 7) {

    if($connect->query($sql) === FALSE)

        echo "$sql : failed";

    else

        echo "<meta http-equiv='refresh' content='0; url=index.php'/>";

    $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : True";

    else

        echo "<meta http-equiv='refresh' content='0; index.php'/>";

    mysql_close($connect);

```

```
}
```

```
?>
```

```
<?php include("footer1.php"); ?>
```

## **Drop**

```
<?php include("header1.php"); ?>
```

```
<?php
```

```
require("ord_slconnect.php");
```

```
$sql = "drop database $db";
```

```
if((int)phpversion() >= 7) {
```

```
    $connect->close();
```

```
    $connect = mysqli_connect($host, $uname, $upass);
```

```
    if (mysqli_query($connect, $sql))
```

```
        echo "Drop database : succeeded";
```

```
    else
```

```
        echo "Drop database : failed " . mysqli_error($connect);
```

```
    $connect->close();
```

```
} else {
```

```
    if (!$result=mysqli_query($sql,$connect))
```

```
        echo "Drop database : failed";
```

```
    else
```

```
        echo "Drop database : succeeded";
```

```
    mysql_close($connect);
```

```
}
```

```
?>
```

```
<input type='button' onclick="location.href='s0index.php'" value='back'>
```

```
<?php include("footer1.php"); ?>
```

## Orderdetails

### Create

```
<?php include("header1.php"); ?>

<?php

if(file_exists("orde_s1connect.php"))

    require("orde_s1connect.php");

else

    die("File not found");

if ($dbstatus == 0) dbWork("create database $db");

qWork("create table $tb (orderid char(5),productid char(40),unitprice char(40),quantity char(40),discount
char(40))");

if((int)phpversion() >= 7) $connect->close(); else mysql_close($connect);

echo '<a href="orde_s0index.php">back</a>';

function dbWork($sql) {

    global $db,$host,$uname,$upass,$connect;

    if((int)phpversion() >= 7) {

        if ($connect->query($sql) === FALSE)

            echo "$sql : failed ". $conn->error . "<br/>";

        else {
```



```

        echo "$sql : succeeded<br/>";

        $connect = new mysqli($host, $uname, $upass, $db);

    }

} else {

    if (!$result=mysqli_query($sql,$connect))

        echo "$sql : failed<br/>";

    else

        echo "$sql : succeeded<br/>";

}

}

function qWork($sql) {

    global $connect,$db;

    if((int)phpversion() >= 7) {

        if ($connect->query($sql) === FALSE)

            echo "$sql : failed ". $conn->error . "<br/>";

        else

            echo "$sql : succeeded<br/>";

    } else {

```

```

        if (!$result=mysql_db_query($db,$sql))

            echo "$sql : failed<br/>";

        else

            echo "$sql : succeeded<br/>";

    }

}

?>

```

```

<?php include("footer1.php"); ?>

```

## Select

```

<?php

require("orde_slconnect.php");

$sql="select * from Orderdetails";

if((int)phpversion() >= 7) {

    $result = $connect->query($sql);

    if ($result->num_rows > 0) {

        while($row = $result->fetch_assoc()) {

            echo "<center>orderid: " . $row["orderid"]. "- productid: " . $row["productid"]. "-
unitprice: " . $row["unitprice"]. "- quantity: " . $row["quantity"]. "- discount: " . $row["discount"]. "<br/>";

        }

    }

}

```

```

    } else {

        echo "no results";

    }

    $connect->close();

} else {

    if (!$result=mysql_db_query($db,$sql)) die("Query : failed");

    echo "Display all records : <br/>";

    while ($object = mysql_fetch_object($result)) {

        echo $object->PID . " " . $object->Pname . "<br/>";

    }

    echo "Total " . mysql_num_rows($result) . " records";

    mysql_close($connect);

}

echo "<center><a href=index.php>back</a>";

?>

```

## Insert

```

<?php include("header1.php"); ?>

<form action=orde_s4insert.php>

```

<input name=ordeid value=>

<input name=proid value=>

<input name=uni value=>

<input name=qua value=>

<input name=dis value=>

<input type=submit value=orde\_s4insert.php>

</form>

<?php

if (!isset(\$\_GET['ordeid']) || !isset(\$\_GET['proid'])) exit;

require("orde\_s1connect.php");

\$sql="insert into \$tb

values('".\$\_GET['ordeid']. "','".\$\_GET['proid']. "','".\$\_GET['uni']. "','".\$\_GET['qua']. "','".\$\_GET['dis']. "')";

if((int)phpversion() >= 7) {

    if(\$connect->query(\$sql) === FALSE)

        echo "\$sql : failed";

    else

        echo "\$sql : succeeded";

    \$connect->close();

} else {

```
        if(!$result=mysql_db_query($db,$sql))

            echo "$sql : failed";

        else

            echo "$sql : succeeded";

        mysql_close($connect);

    }

?>
```

```
<?php include("footer1.php"); ?>
```

## **Delete**

```
<?php include("header1.php"); ?>
```

```
<form action=orde_s4insert.php>
```

```
<input name=ordeid value=>
```

```
<input name=proid value=>
```

```
<input name=uni value=>
```

```
<input name=qua value=>
```

```
<input name=dis value=>
```

```
<input type=submit value=orde_s4insert.php>
```

```
</form>
```

```
<?php

if (!isset($_GET['ordeid']) || !isset($_GET['proid'])) exit;

require("orde_slconnect.php");

$sql="insert into $tb
values('".$_GET['ordeid']. "','".$_GET['proid']. "','".$_GET['uni']. "','".$_GET['qua']. "','".$_GET['dis']. "')";

if((int)phpversion() >= 7) {

    if($connect->query($sql) === FALSE)

        echo "$sql : failed";

    else

        echo "$sql : succeeded";

    $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : failed";

    else

        echo "$sql : succeeded";

    mysql_close($connect);

}

?>
```

```
<?php include("footer1.php"); ?>
```

## Update

```
<?php include("header1.php"); ?>
```

```
<form action="orde_s6update.php">
```

```
<input name="ordeid" value="">
```

```
<input name="prouid" value="">
```

```
<input name="unit" value="">
```

```
<input name="quan" value="">
```

```
<input name="disc" value="">
```

```
<input type="submit" value="orde_s6update.php">
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['ordeid'])) { exit; }
```

```
require("orde_s1connect.php");
```

```
$sql.="update Orderdetails set ";
```

```
$sql.="orderid='". $_GET['ordeid'] .'", ";
```

```
$sql.="productid='". $_GET['prouid'] .'", ";
```

```
$sql.="unitprice='". $_GET['unit'] .'", ";
```

```
$sql.="quantity='". $_GET['quan'] ."' , ";
```

```
$sql.="discount='". $_GET['disc'] ."' ";
```

```
$sql.="where orderid='". $_GET['ordeid'] ."'";
```

```
if((int)phpversion() >= 7) {
```

```
    if($connect->query($sql) === FALSE)
```

```
        echo "$sql : failed";
```

```
    else
```

```
        echo "<meta http-equiv='refresh' content='0; url=index.php'/>";
```

```
    $connect->close();
```

```
} else {
```

```
    if(!$result=mysql_db_query($db,$sql))
```

```
        echo "$sql : True";
```

```
    else
```

```
        echo "<meta http-equiv='refresh' content='0; url=index.php'/>";
```

```
    mysql_close($connect);
```

```
}
```

```
?>
```

```
<?php include("footer1.php"); ?>
```



## Drop

```
<?php include("header1.php"); ?>
```

```
<?php
```

```
require("orde_slconnect.php");
```

```
$sql = "drop database $db";
```

```
if((int)phpversion() >= 7) {
```

```
    $connect->close();
```

```
    $connect = mysqli_connect($host, $uname, $upass);
```

```
    if (mysqli_query($connect, $sql))
```

```
        echo "Drop database : succeeded";
```

```
    else
```

```
        echo "Drop database : failed " . mysqli_error($connect);
```

```
    $connect->close();
```

```
} else {
```

```
    if (!$result=mysqli_query($sql,$connect))
```

```
        echo "Drop database : failed";
```

```
    else
```

```
        echo "Drop database : succeeded";
```

```
        mysql_close($connect);

    }

?>

<input type='button' onclick="location.href='s0index.php'" value='back'>

<?php include("footer1.php"); ?>
```

## productsTest

### create

```
<?php include("header1.php"); ?>

<?php

if(file_exists("pro_slconnect.php"))

    require("pro_slconnect.php");

else

    die("File not found");

if ($dbstatus == 0) dbWork("create database $db");

qWork("create table $tb (PID char(4),Pname char(40),SupID char(40),QPU char(40),UP char(40))");

if((int)phpversion() >= 7) $connect->close(); else mysql_close($connect);

echo '<a href="pro_s0index.php">back</a>';

function dbWork($sql) {

    global $db,$host,$uname,$upass,$connect;

    if((int)phpversion() >= 7) {

        if ($connect->query($sql) === FALSE)

            echo "$sql : failed ". $conn->error . "<br/>";

        else {
```

```

        echo "$sql : succeeded<br/>";

        $connect = new mysqli($host, $uname, $upass, $db);

    }

} else {

    if (!$result=mysqli_query($sql,$connect))

        echo "$sql : failed<br/>";

    else

        echo "$sql : succeeded<br/>";

}

}

function qWork($sql) {

    global $connect,$db;

    if((int)phpversion() >= 7) {

        if ($connect->query($sql) === FALSE)

            echo "$sql : failed ". $conn->error . "<br/>";

        else

            echo "$sql : succeeded<br/>";

    } else {

```

```

        if (!$result=mysql_db_query($db,$sql))

            echo "$sql : failed<br/>";

        else

            echo "$sql : succeeded<br/>";

    }

}

?>

```

```

<?php include("footer1.php"); ?>

```

## Select

```

<?php

require("pro_slconnect.php");

$sql="select * from productsTest";

if((int)phpversion() >= 7) {

    $result = $connect->query($sql);

    if ($result->num_rows > 0) {

        while($row = $result->fetch_assoc()) {

            echo "<center> id: " . $row["PID"]. "- PName: " . $row["Pname"]. "- SupID: " .
            $row["SupID"]. "- QPU: " . $row["QPU"]. "- UP: " . $row["UP"]. "<br/>";

        }

    }

}

```

```

    } else {

        echo "no results";

    }

    $connect->close();

} else {

    if (!$result=mysql_db_query($db,$sql)) die("Query : failed");

    echo "Display all records : <br/>";

    while ($object = mysql_fetch_object($result)) {

        echo $object->PID . " " . $object->Pname . "<br/>";

    }

    echo "Total " . mysql_num_rows($result) . " records";

    mysql_close($connect);

}

echo "<center><a href=pro_s0index.php>back</a>";

?>

```

## Insert

```
<?php include("header1.php"); ?>
```

```
<form action=pro_s4insert.php>
```

```
<input name=nid value=>
```

```
<input name=nname value=>
```

```
<input name=sup value=>
```

```
<input name=qpu value=>
```

```
<input name=up value=>
```

```
<input type=submit value=s4insert.php>
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['nid']) || !isset($_GET['nname'])) exit;
```

```
require("pro_s1connect.php");
```

```
$sql="insert into $tb
```

```
values('".$_GET['nid'].",".$_GET['nname'].",".$_GET['sup'].",".$_GET['qpu'].",".$_GET['up'].")";
```

```
if((int)phpversion() >= 7) {
```

```
    if($connect->query($sql) === FALSE)
```

```
        echo "$sql : failed";
```

```
    else
```

```
        echo "$sql : succeeded";
```

```
    $connect->close();
```

```

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : failed";

    else

        echo "$sql : succeeded";

    mysql_close($connect);

}

?>

```

```

<?php include("footer1.php"); ?>

```

## Delete

```

<?php include("header1.php"); ?>

```

```

<?php

```

```

$myForm = '<body>

```

```

<form action="pro_s5delete.php">

```

```

<input name="delid" value="1001">

```

```

<input type="submit" value="pro_s5delete.php">

```

```

</form>';

```

```

if (!isset($_GET['delid'])) {

```



```

echo $myForm;

exit;

}

require("pro_slconnect.php");

$sql="delete from $tb ";

$sql.="where PID =".$_GET['delid']."";

if((int)phpversion() >= 7) {

    if($connect->query($sql) === FALSE)

        echo "$sql : failed";

    else

        header("location: pro_slindex.php");

    $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : failed";

    else

        header("location: pro_slindex.php");

    mysql_close($connect);

```

```
}
```

```
?>
```

```
<?php include("footer1.php"); ?>
```

## Update

```
<?php include("header1.php"); ?>
```

```
<form action="pro_s6update.php">
```

```
<input name="id" value="">
```

```
<input name="name" value="">
```

```
<input name="sup" value="">
```

```
<input name="qpu" value="">
```

```
<input name="up" value="">
```

```
<input type="submit" value="s6update.php">
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['id'])) { exit; }
```

```
require("pro_s1connect.php");
```

```
$sql.="update productsTest set ";
```

```
$sql.="PID =". $_GET['id'] .", ";
```

```

$sql.="Pname='". $_GET['name'] ."', ";

$sql.="SupID='". $_GET['sup'] ."', ";

$sql.="QPU='". $_GET['qpu'] ."', ";

$sql.="UP='". $_GET['up'] ."' ";

$sql.="where PID='". $_GET['id'] .'"';

if((int)phpversion() >= 7) {

    if($connect->query($sql) === FALSE)

        echo "$sql : failed";

    else

        echo "<meta http-equiv='refresh' content='0'; url=pro_s0index.php'/>";

    $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : True";

    else

        echo "<meta http-equiv='refresh' content='0'; url=pro_s0index.php'/>";

    mysql_close($connect);

}

```

?>

<?php include("footer1.php"); ?>

## **Drop**

<?php include("header1.php"); ?>

<?php

/\* updated for php7 and php 5 on 2560-09-13 \*/

require("s1connect.php");

\$sql = "drop database \$db";

if((int)phpversion() >= 7) {

    \$connect->close();

    \$connect = mysqli\_connect(\$host, \$uname, \$upass);

    if (mysqli\_query(\$connect, \$sql))

        echo "Drop database : succeeded";

    else

        echo "Drop database : failed " . mysqli\_error(\$connect);

    \$connect->close();

} else {

    if (!\$result=mysqli\_query(\$sql,\$connect))

```
        echo "Drop database : failed";
```

```
    else
```

```
        echo "Drop database : succeeded";
```

```
    mysql_close($connect);
```

```
}
```

```
?>
```

```
<input type='button' onclick="location.href='s0index.php'" value='back'>
```

```
<?php include("footer1.php"); ?>
```

## Shippers

### Create

```
<?php include("header1.php"); ?>

<?php

if(file_exists("sh_slconnect.php"))

    require("sh_slconnect.php");

else

    die("File not found");

if ($dbstatus == 0) dbWork("create database $db");

qWork("create table $tb (shid char(4),comname char(40),phone char(40))");

if((int)phpversion() >= 7) $connect->close(); else mysql_close($connect);

echo '<a href="index.php">back</a>';

function dbWork($sql) {

    global $db,$host,$uname,$upass,$connect;

    if((int)phpversion() >= 7) {

        if ($connect->query($sql) === FALSE)

            echo "$sql : failed ". $conn->error . "<br/>";

        else {
```

```

        echo "$sql : succeeded<br/>";

        $connect = new mysqli($host, $uname, $upass, $db);

    }

} else {

    if (!$result=mysqli_query($sql,$connect))

        echo "$sql : failed<br/>";

    else

        echo "$sql : succeeded<br/>";

}

}

function qWork($sql) {

    global $connect,$db;

    if((int)phpversion() >= 7) {

        if ($connect->query($sql) === FALSE)

            echo "$sql : failed ". $conn->error . "<br/>";

        else

            echo "$sql : succeeded<br/>";

    } else {

```

```

        if (!$result=mysql_db_query($db,$sql))

            echo "$sql : failed<br/>";

        else

            echo "$sql : succeeded<br/>";

    }

}

?>

```

```

<?php include("footer1.php"); ?>

```

## Select

```

<?php

require("sh_slconnect.php");

$sql="select * from Shippers";

if((int)phpversion() >= 7) {

    $result = $connect->query($sql);

    if ($result->num_rows > 0) {

        while($row = $result->fetch_assoc()) {

            echo "<center> id: " . $row["shid"]. "- Company: " . $row["comname"]. "- Phone: " .
            $row["phone"]. "<br/>";

        }

    }

}

```



```

    } else {

        echo "no results";

    }

    $connect->close();

} else {

    if (!$result=mysql_db_query($db,$sql)) die("Query : failed");

    echo "Display all records : <br/>";

    while ($object = mysql_fetch_object($result)) {

        echo $object->PID . " " . $object->Pname . "<br/>";

    }

    echo "Total " . mysql_num_rows($result) . " records";

    mysql_close($connect);

}

echo "<center><a href=index.php>back</a>";

?>

```

## Insert

```

<?php include("header1.php"); ?>

<form action=sh_s4insert.php>

```

```
<input name=shid value=>
```

```
<input name=comname value=>
```

```
<input name=phone value=>
```

```
<input type=submit value=sh_s4insert.php>
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['shid']) || !isset($_GET['comname'])) exit;
```

```
require("sh_s1connect.php");
```

```
$sql="insert into $tb values('".$_GET['shid']. "','".$_GET['comname']. "','".$_GET['phone']. "')";
```

```
if((int)phpversion() >= 7) {
```

```
    if($connect->query($sql) === FALSE)
```

```
        echo "$sql : failed";
```

```
    else
```

```
        echo "$sql : succeeded";
```

```
    $connect->close();
```

```
} else {
```

```
    if(!$result=mysql_db_query($db,$sql))
```

```
        echo "$sql : failed";
```

```
        else

            echo "$sql : succeeded";

            mysql_close($connect);

        }

    ?>
```

```
<?php include("footer1.php"); ?>
```

## Delete

```
<?php include("header1.php"); ?>
```

```
<?php
```

```
$myForm = '<body>
```

```
<form action="sh_s5delete.php">
```

```
<input name="delid" value=".....">
```

```
<input type="submit" value="sh_s5delete.php">
```

```
</form>';
```

```
if (!isset($_GET['delid'])) {
```

```
    echo $myForm;
```

```
    exit;
```

```
}

require("sh_slconnect.php");

$sql="delete from $tb ";

$sql.="where shid =".$_GET['delid']."";

if((int)phpversion() >= 7) {

    if($connect->query($sql) === FALSE)

        echo "$sql : failed";

    else

        header("location: index.php");

    $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : failed";

    else

        header("location: index.php");

    mysql_close($connect);

}

?>
```

```
<?php include("footer1.php"); ?>
```

## Update

```
<?php include("header1.php"); ?>
```

```
<form action="sh_s6update.php">
```

```
<input name="shid" value="">
```

```
<input name="commname" value="">
```

```
<input name="phh" value="">
```

```
<input type="submit" value="sh_s6update.php">
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['shid'])) { exit; }
```

```
require("sh_s1connect.php");
```

```
$sql.="update Shippers set ";
```

```
$sql.="shid =". $_GET['shid'] .", ";
```

```
$sql.="comname =". $_GET['commname'] .", ";
```

```
$sql.="phone =". $_GET['phh'] ."";
```

```
$sql.="where shid =". $_GET['shid'] ."";
```

```
if((int)phpversion() >= 7) {
```

```

        if($connect->query($sql) === FALSE)

            echo "$sql : failed";

        else

            echo "<meta http-equiv='refresh' content='0; url=index.php'/>";

        $connect->close();

    } else {

        if(!$result=mysql_db_query($db,$sql))

            echo "$sql : True";

        else

            echo "<meta http-equiv='refresh' content='0; url=index.php'/>";

        mysql_close($connect);

    }

?>

<?php include("footer1.php"); ?>

```

## Drop

```

<?php include("header1.php"); ?>

<?php

require("sh_slconnect.php");

```

```
$sql = "drop database $db";

if((int)phpversion() >= 7) {

    $connect->close();

    $connect = mysqli_connect($host, $uname, $upass);

    if (mysqli_query($connect, $sql))

        echo "Drop database : succeeded";

    else

        echo "Drop database : failed " . mysqli_error($connect);

    $connect->close();

} else {

    if (!$result=mysqli_query($sql,$connect))

        echo "Drop database : failed";

    else

        echo "Drop database : succeeded";

    mysqli_close($connect);

}

?>

<input type='button' onclick="location.href='s0index.php'" value='back'>
```

```
<?php include("footer1.php"); ?>
```



## Suppliers

### Create

```
<?php include("header1.php"); ?>
```

```
<?php
```

```
if(file_exists("sup_slconnect.php"))
```

```
    require("sup_slconnect.php");
```

```
else
```

```
    die("File not found");
```

```
if ($dbstatus == 0) dbWork("create database $db");
```

```
qWork("create table $tb (supid char(4),comname char(40),address char(40),post char(40),phone char(40))");
```

```
if((int)phpversion() >= 7) $connect->close(); else mysql_close($connect);
```

```
echo '<a href="index.php">back</a>';
```

```
function dbWork($sql) {
```

```
    global $db,$host,$uname,$upass,$connect;
```

```
    if((int)phpversion() >= 7) {
```

```
        if ($connect->query($sql) === FALSE)
```

```
            echo "$sql : failed ". $conn->error . "<br/>";
```

```
        else {
```

```

        echo "$sql : succeeded<br/>";

        $connect = new mysqli($host, $uname, $upass, $db);

    }

} else {

    if (!$result=mysqli_query($sql,$connect))

        echo "$sql : failed<br/>";

    else

        echo "$sql : succeeded<br/>";

}

}

function qWork($sql) {

    global $connect,$db;

    if((int)phpversion() >= 7) {

        if ($connect->query($sql) === FALSE)

            echo "$sql : failed ". $conn->error . "<br/>";

        else

            echo "$sql : succeeded<br/>";

    } else {

```

```

        if (!$result=mysql_db_query($db,$sql))

            echo "$sql : failed<br/>";

        else

            echo "$sql : succeeded<br/>";

    }

}

?>

```

```

<?php include("footer1.php"); ?>

```

## Select

```

<?php

require("sup_slconnect.php");

$sql="select * from Suppliers";

if((int)phpversion() >= 7) {

    $result = $connect->query($sql);

    if ($result->num_rows > 0) {

        while($row = $result->fetch_assoc()) {

            echo "<center> id: " . $row["supid"]. "- companyName: " . $row["comname"]. "-
address: " . $row["address"]. "- post: " . $row["post"]. "- phone: " . $row["phone"]. "<br/>";

        }

    }

}

```

```

    } else {

        echo "no results";

    }

    $connect->close();

} else {

    if (!$result=mysql_db_query($db,$sql)) die("Query : failed");

    echo "Display all records : <br/>";

    while ($object = mysql_fetch_object($result)) {

        echo $object->PID . " " . $object->Pname . "<br/>";

    }

    echo "Total " . mysql_num_rows($result) . " records";

    mysql_close($connect);

}

echo "<center><a href=index.php>back</a>";

?>

```

## Insert

```

<?php include("header1.php"); ?>

<form action=sup_s4insert.php>

```

```
<input name=supid value=>
```

```
<input name=comname value=>
```

```
<input name=add value=>
```

```
<input name=post value=>
```

```
<input name=ph value=>
```

```
<input type=submit value=sup_s4insert.php>
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['supid']) || !isset($_GET['comname'])) exit;
```

```
require("sup_s1connect.php");
```

```
$sql="insert into $tb
```

```
values('".$_GET['supid']."','".$_GET['comname']."','".$_GET['add']."','".$_GET['post']."','".$_GET['ph']."'");
```

```
if((int)phpversion() >= 7) {
```

```
    if($connect->query($sql) === FALSE)
```

```
        echo "$sql : failed";
```

```
    else
```

```
        echo "$sql : succeeded";
```

```
    $connect->close();
```

```
} else {
```

```
        if(!$result=mysql_db_query($db,$sql))

            echo "$sql : failed";

        else

            echo "$sql : succeeded";

        mysql_close($connect);

    }

?>
```

```
<?php include("footer1.php"); ?>
```

## Delete

```
<?php include("header1.php"); ?>
```

```
<?php
```

```
$myForm = '<body>
```

```
<form action="sup_s5delete.php">
```

```
<input name="delid" value=".....">
```

```
<input type="submit" value="sup_s5delete.php">
```

```
</form>';
```

```
if (!isset($_GET['delid'])) {
```

```
    echo $myForm;
```

```
        exit;

    }

    require("sup_slconnect.php");

    $sql="delete from $tb ";

    $sql.="where supid ='".$_GET['delid']. "'";

    if((int)phpversion() >= 7) {

        if($connect->query($sql) === FALSE)

            echo "$sql : failed";

        else

            header("location: index.php");

        $connect->close();

    } else {

        if(!$result=mysql_db_query($db,$sql))

            echo "$sql : failed";

        else

            header("location: index.php");

        mysql_close($connect);

    }
```

?>

<?php include("footer1.php"); ?>

## Update

<?php include("header1.php"); ?>

<form action="sup\_s6update.php">

<input name="supid" value="">

<input name="supcom" value="">

<input name="supadd" value="">

<input name="suppo" value="">

<input name="supph" value="">

<input type="submit" value="sup\_s6update.php">

</form>

<?php

if (!isset(\$\_GET['supid'])) { exit; }

require("sup\_s1connect.php");

\$sql.="update Suppliers set ";

\$sql.="supid='". \$\_GET['supid'] .'", ";

\$sql.="comname='". \$\_GET['supcom'] .'", ";



```
$sql.="address='". $_GET['supadd'] ."' , ";
```

```
$sql.="post='". $_GET['suppo'] ."' , ";
```

```
$sql.="phone='". $_GET['supph'] ."' ";
```

```
$sql.="where supid='". $_GET['supid'] ."'";
```

```
if((int)phpversion() >= 7) {
```

```
    if($connect->query($sql) === FALSE)
```

```
        echo "$sql : failed";
```

```
    else
```

```
        echo "<meta http-equiv='refresh' content='0'; url=index.php'/>";
```

```
    $connect->close();
```

```
} else {
```

```
    if(!$result=mysql_db_query($db,$sql))
```

```
        echo "$sql : True";
```

```
    else
```

```
        echo "<meta http-equiv='refresh' content='0'; url=index.php'/>";
```

```
    mysql_close($connect);
```

```
}
```

```
?>
```

```
<?php include("footer1.php"); ?>
```

## **Drop**

```
<?php include("header1.php"); ?>
```

```
<?php
```

```
require("sup_slconnect.php");
```

```
$sql = "drop database $db";
```

```
if((int)phpversion() >= 7) {
```

```
    $connect->close();
```

```
    $connect = mysqli_connect($host, $uname, $upass);
```

```
    if (mysqli_query($connect, $sql))
```

```
        echo "Drop database : succeeded";
```

```
    else
```

```
        echo "Drop database : failed " . mysqli_error($connect);
```

```
    $connect->close();
```

```
} else {
```

```
    if (!$result=mysqli_query($sql,$connect))
```

```
        echo "Drop database : failed";
```

```
    else
```

```
echo "Drop database : succeeded";
```

```
mysql_close($connect);
```

```
}
```

```
?>
```

```
<input type='button' onclick="location.href='s0index.php'" value='back'>
```

```
<?php include("footer1.php"); ?>
```

## ตัวอย่างการ insert

|            |  |  |  |  |
|------------|--|--|--|--|
|            |  |  |  |  |
| insert.php |  |  |  |  |

## ตัวอย่างการ Update

|            |  |  |  |  |
|------------|--|--|--|--|
|            |  |  |  |  |
| update.php |  |  |  |  |

## ตัวอย่างการ Delete

|   |   |            |
|---|---|------------|
| 1 | × | delete.php |
|---|---|------------|

## ตัวอย่างการ Drop

|                           |      |
|---------------------------|------|
| Drop database : succeeded | back |
|---------------------------|------|

## หน้าConnect ของแต่ละตัว

```
<?php
```

```
ini_set('display_errors', 0);
```

```
$host = "localhost";
```

```
$uname = "root";
```

```
$upass = "";
```

```
$db = "f-products";
```

```
$tb= "ใส่ชื่อตารางของแต่ละtable";
```

```
$dbstatus = 0;
```

```
myConnect();
```

```
function myConnect() {
```

```
    global $db,$host,$uname,$upass,$connect,$dbstatus;
```

```
    if((int)phpversion() >= 7) {
```

```
        $connect = new mysqli($host, $uname, $upass, $db);
```

```
        if ($connect->connect_error) $connect = new mysqli($host, $uname, $upass); else $dbstatus  
= 1;
```

```
        if ($connect->connect_error) die("Connection failed: " . $connect->connect_error);
```

```
    } else {
```

```
if(!$connect = mysql_connect($host,$uname,$upass)) die("Connect failed : ");
```

```
}
```

```
}
```

```
?>
```

## Code pyramid

```
11
2**2
3****3
4*****4
3****3
2**2
11
```

### Pyramid1

```
<?php include("header1.php"); ?>
```

```
<?php include ("font_f.php");?>
```

```
<center><h1>Pyramid1</h1></center>
```

```
<?php
```

```
for($fearn=1;$fearn<=4;$fearn++) {
```

```
    for($col=2;$col<=0+$fearn;$col++) {
```

```
        echo(" ");
```

```
    }
```

```
    for($col=$fearn;$col<=$fearn+1;$col++) {
```

```
        echo($fearn);
```

```
}
```

```
for($col=1;$col<=4-$fearn;$col++){
```

```
    echo("**");
```

```
}
```

```
for($col=$fearn;$col<=$fearn+1;$col++) {
```

```
    echo($fearn);
```

```
}
```

```
echo "<br/>";
```

```
}
```

```
?>
```

```
<?php include("footer1.php"); ?>
```

## **Pyramid2**

```
<?php include("header1.php"); ?>
```

```
<?php include ("font_f.php");?>
```

```
<center><h1>Pyramid2</h1></center>
```

```
<?php
```

```
for($fearn=1;$fearn<=4;$fearn++) {
```

```
    for($col=$fearn;$col<=$fearn+2;$col++) {
```



```

        echo($col);

    }

    for($col=0;$col<=1+$fearn;$col++){

        echo("*");

    }

echo "<br/>";

}

?>

```

```

<?php include("footer1.php"); ?>

```

### **Pyramid3**

```

<?php include("header1.php"); ?>

```

```

<?php include ("font_f.php");?>

```

```

<center><h1>Pyramid3</h1></center>

```

```

<?php

```

```

for($fearn=1;$fearn<=4;$fearn++) {

    for($col=$fearn;$col<=$fearn;$col++) {

        echo($col);

    }
}

```

```
for($col=$fearn;$col<=$fearn;$col++) {  
  
    echo($col+4);  
  
}
```

```
for($col=0;$col<=3+$fearn;$col++) {  
  
    echo("*");  
  
}
```

```
    echo "<br/>";  
  
}  
  
?>
```

```
<?php include("footer1.php"); ?>
```

## **Pyramid4**

```
<?php include("header1.php"); ?>
```

```
<?php include ("font_f.php");?>
```

```
<center><h1>Pyramid4</h1></center>
```

```
<?php
```

```

for($fearn=1;$fearn<=4;$fearn++) {

    for($col=1;$col<=$fearn;$col++) {

        echo("*");

    }

    for($col=$fearn;$col>=2;$col--){

        echo($col);

    }

    for($col=1;$col<=$fearn;$col++){

        echo($col);

    }

    echo "<br/>";

}

?>

```

```

<?php include("footer1.php"); ?>

```

## Pyramid5

```

<?php include("header1.php"); ?>

```

```

<?php include ("font_f.php");?>

```

```

<center><h1>Pyramid5</h1></center>

```

<?php

```
for($fearn=1;$fearn<=4;$fearn++) {
```

```
    for($col=1;$col<=4-$fearn;$col++) {
```

```
        /*ãÔèÁµé¹;ÊÔé¹ÊØ´;ïÔÃàÅ×èÍ'ä» (à³¼ÔèÁçÑé¹ / Å´Å§)*/
```

```
        echo(" ");
```

```
    }
```

```
    echo($fearn);
```

```
    for($col=2;$col<=$fearn;$col++){
```

```
        echo("**");
```

```
    }
```

```
    echo($fearn);
```

```
    echo "<br/>";
```

```
}
```

```
for($fearn=3;$fearn>=1;$fearn--) {
```

```
    for($col=1;$col<=4-$fearn;$col++) {
```

```
        echo(" ");
```

```
    }
```

```
        echo($fearn);

        for($col=2;$col<=$fearn;$col++){

            echo("**");

        }

        echo($fearn);

        echo "<br/>";

    }

?>
```

```
<?php include("footer1.php"); ?>
```

## **pyramid6**

```
<?php include("header1.php"); ?>
```

```
<?php include ("font_f.php");?>
```

```
<center><h1>Pyramid6</h1></center>
```

```
<?php
```

```
for($fearn=1;$fearn<=7;$fearn++) {

    for($col=2;$col<=1+$fearn;$col++) {

        echo(" ");
```

```
}

for($col=1;$col<=1;$col++){

    echo($col);

}

for($col=$fearn;$col<=6;$col++){

    echo("01");

}

echo "<br/>";

}

?>
```

```
<?php include("footer1.php"); ?>
```

## **pyramid7**

```
<?php include("header1.php"); ?>
```

```
<?php include ("font_f.php");?>
```

```
<center><h1>Pyramid7</h1></center>
```

```
<?php
```

```
for($fearn=1;$fearn<=7;$fearn++) {
```

```

for($col=0;$col<=7-$fearn;$col++) {

    echo(" ");

}

for($col=1;$col<=1;$col++){

    echo($col);

}

for($col=3;$col<=1+$fearn;$col++){

    echo($col-1);

}

    echo($fearn);

for($col=$fearn;$col>=1;$col--){

    echo($col);

}

    echo "<br/>";

}

?>

```

```

<?php include("footer1.php"); ?>

```

**pyramid8**

```
<?php include("header1.php");?>
```

```
<?php include ("font_f.php");?>
```

```
<center><h1>Pyramid8</h1></center>
```

```
<?php
```

```
for($fearn=1;$fearn<=7;$fearn++) {
```

```
    for($col=3;$col<=1+$fearn;$col++) {
```

```
        echo(" ");
```

```
    }
```

```
    for($col=$fearn;$col<=$fearn;$col++){
```

```
        echo($fearn);
```

```
        echo($fearn+1);
```

```
        echo($fearn+2);
```

```
    }
```

```
    for($col=2;$col<=2+$fearn;$col++){
```

```
        echo("*");
```

```
    }
```

```
    echo "<br/>";
```



```
}
```

```
?>
```

```
<?php include("footer1.php"); ?>
```

**pyramid9**

```
<?php include("header1.php");?>
```

```
<?php include ("font_f.php");?>
```

```
<center><h1>Pyramid9</h1></center>
```

```
<?php
```

```
for($fearn=1;$fearn<=5;$fearn++) {
```

```
    for($col=3;$col<=1+$fearn;$col++) {
```

```
        echo(" ");
```

```
    }
```

```
    for($col=0;$col<=5-$fearn;$col++){
```

```
        echo($fearn);
```

```
    }
```

```
    for($col=0;$col<=4-$fearn;$col++){
```

```
        echo($fearn);

    }

    echo "<br/>";

}

?>
```

```
<?php include("footer1.php"); ?>
```

## **pyramid10**

```
<?php include("header1.php");?>
```

```
<?php include ("font_f.php");?>
```

```
<center><h1>Pyramid10</h1></center>
```

```
<?php
```

```
for($fearn=1;$fearn<=5;$fearn++) {

    for($scol=1;$scol<=5-$fearn;$scol++) {

        echo(" ");

    }

    for($scol=1;$scol<=$fearn;$scol++){
```

```
        echo($col);

    }

    for($col=$fearn;$col<=$fearn;$col++){

        echo(6-$fearn);

    }

    for($col=$fearn;$col>=1;$col--){

        echo($col);

    }

    echo "<br/>";

}

?>
```

```
<?php include("footer1.php"); ?>
```

## **pyramid11**

```
<?php include("header1.php"); ?>
```

```
<?php include ("font_f.php");?>
```

```
<center><h1>Pyramid11</h1></center>
```

```
<?php
```

```
for($fearn=1;$fearn<=5;$fearn++) {
```

```
    for($col=1;$col<=5-$fearn;$col++) {
```

```
        echo(" ");
```

```
    }
```

```
    for($col=$fearn;$col<=$fearn;$col++){
```

```
        echo($fearn);
```

```
    }
```

```
    for($col=2;$col<=$fearn;$col++){
```

```
        echo(" ");
```

```
    }
```

```
    echo($fearn);
```

```
    echo "<br/>";
```

```
}
```

```
?>
```

```
<?php include("footer1.php"); ?>
```

## pyramid12

```
<?php include("header1.php"); ?>
```

```
<?php include ("font_f.php");?>
```

```
<center><h1>Pyramid12</h1></center>
```

```
<?php
```

```
for($fearn=1;$fearn<=5;$fearn++) {
```

```
    for($col=2;$col<=$fearn;$col++) {
```

```
        echo(" ");
```

```
    }
```

```
    for($col=$fearn;$col<=10-$fearn;$col++){
```

```
        echo($col);
```

```
    }
```

```
    echo "<br/>";
```

```
}
```

```
?>
```

```
<?php include("footer1.php"); ?>
```

## pyramid13

```
<?php include("header1.php"); ?>
```

```
<?php include ("font_f.php");?>
```

```
<center><h1>Pyramid13</h1></center>
```

```
<?php
```

```
for($fearn=1;$fearn<=5;$fearn++) {
```

```
    for($col=2;$col<=$fearn;$col++) {
```

```
        echo(" ");
```

```
    }
```

```
    for($col=11;$col>=11;$col--){
```

```
        echo($col-$fearn-$fearn);
```

```
    }
```

```
    for($col=10;$col>=6+$fearn;$col--){
```

```
        echo($col-$fearn-$fearn);
```

```
    }
```

```
    for($col=5;$col>=1+$fearn;$col--){
```

```
        echo($col-$fearn);
```

```
    }
```

```
    echo "<br/>";
```

```
}
```

?>

<?php include("footer1.php"); ?>

## **pyramid14**

<?php include("header1.php"); ?>

<?php include ("font\_f.php");?>

<center><h1>Pyramid14</h1></center>

<?php

for(\$fearn=1;\$fearn<=5;\$fearn++) {

    for(\$scol=2;\$scol<=0+\$fearn;\$scol++) {

        echo(" ");

    }

    for(\$scol=\$fearn;\$scol<=\$fearn;\$scol++) {

        echo(\$fearn);

    }

    echo(\$fearn+1);

    for(\$scol=1;\$scol<=5-\$fearn;\$scol++){

```
        echo(" ");  
  
    }
```

```
    for($col=$fearn;$col<=$fearn;$col++) {  
  
        echo($fearn+1);  
  
    }
```

```
    echo($fearn);
```

```
  
    echo "<br/>";  
  
}
```

```
?>
```

```
<?php include("footer1.php"); ?>
```

## **pyramid15**

```
<?php include("header1.php"); ?>
```

```
<?php include ("font_f.php");?>
```

```
<center><h1>Pyramid15</h1></center>
```

```
<?php
```



```
for($fearn=1;$fearn<=5;$fearn++) {  
  
    for($col=5;$col>=$fearn;$col--) {  
  
        echo($fearn);  
  
    }  
  
    for($col=1;$col<=$fearn;$col++) {  
  
        echo(" ");  
  
    }  
  
    for($col=2;$col<=$fearn;$col++) {  
  
        echo(" ");  
  
    }  
  
    for($col=5;$col>=$fearn;$col--) {  
  
        echo($fearn);  
  
    }  
  
    echo "<br/>";  
  
}  
  
?>
```

```
<?php include("footer1.php"); ?>
```

## **pyramid16**

```
<?php include("header1.php"); ?>
```

```
<?php include ("font_f.php");?>
```

```
<center><h1>Pyramid16</h1></center>
```

```
<?php
```

```
for($fearn=1;$fearn<=5;$fearn++) {
```

```
    for($col=$fearn;$col>=1;$col--){
```

```
        echo($col);
```

```
    }
```

```
    for($col=1;$col<=5-$fearn;$col++){
```

```
        echo(" ");
```

```
    }
```

```
    for($col=$fearn;$col>=1;$col--){
```

```
        echo("*");
```

```
    }
```

```
    echo "<br/>";
```

```
}
```

```
?>
```

```
<?php include("footer1.php"); ?>
```

## **pyramid17**

```
<?php include("header1.php"); ?>
```

```
<?php include ("font_f.php");?>
```

```
<center><h1>Pyramid17</h1></center>
```

```
<?php
```

```
for($fearn=1;$fearn<=5;$fearn++) {
```

```
    for($col=$fearn;$col<=$fearn;$col++) {
```

```
        echo($col);
```

```
        echo(10-$fearn);
```

```
        echo($col);
```

```
        echo(10-$fearn);
```

```
        echo($col);
```

```
        echo(10-$fearn);
```

```
        echo($col);
```

```
        echo(10-$fearn);
```

```
    }

    echo "<br/>";

}

?>
```

```
<?php include("footer1.php"); ?>
```

## **pyramid18**

```
<?php include("header1.php"); ?>
```

```
<?php include ("font_f.php");?>
```

```
<center><h1>Pyramid18</h1></center>
```

```
<?php
```

```
for($fearn=1;$fearn<=5;$fearn++) {

    for($scol=$fearn;$scol<=$fearn;$scol++) {

        echo($scol);

    }

    for($scol=1;$scol<=$fearn;$scol++) {

        echo("*");

    }

    echo($scol-1);
```

```
        for($col=1;$col<=6-$fearn;$col++) {

            echo("*");

        }

        echo($col+3);

        echo "<br/>";

    }

?>
```

```
<?php include("footer1.php"); ?>
```

## **pyramid19**

```
<?php include("header1.php");?>
```

```
<?php include ("font_f.php");?>
```

```
<center><h1>Pyramid19</h1></center>
```

```
<?php
```

```
for($fearn=1;$fearn<=5;$fearn++) {

    for($col=$fearn;$col<=$fearn;$col++) {

        echo($col);

    }

}
```

```

        for($col=$fearn;$col<=9;$col++){

            echo("*");

        }

        for($col=2;$col<=$fearn;$col++){

            echo(" ");

        }

        for($col=$fearn;$col<=$fearn;$col++){

            echo(6-$fearn);

        }

        echo "<br/>";

    }

?>

```

```

<?php include("footer1.php"); ?>

```

## pyramid20

```

<?php include("header1.php");?>

```

```

<?php include ("font_f.php");?>

```

```

<center><h1>Pyramid20</h1></center>

```

```
<?php
```

```
for($fearn=1;$fearn<=5;$fearn++) {
```

```
    for($col=1;$col<=$fearn;$col++) {
```

```
        echo($fearn);
```

```
    }
```

```
    for($col=1;$col<=$fearn;$col++) {
```

```
        echo("*");
```

```
    }
```

```
    for($col=1;$col<=$fearn;$col++) {
```

```
        echo($fearn);
```

```
    }
```

```
    echo "<br/>";
```

```
}
```

```
?>
```

```
<?php include("footer1.php"); ?>
```

## **pyramid21**

```
<?php include("header1.php");?>
```

```
<?php include ("font_f.php");?>
```

```
<center><h1>Pyramid20</h1></center>
```

```
<?php
```

```
for($fearn=1;$fearn<=5;$fearn++) {
```

```
    for($col=1;$col<=$fearn;$col++) {
```

```
        echo($fearn);
```

```
    }
```

```
    for($col=1;$col<=$fearn;$col++) {
```

```
        echo("*");
```

```
    }
```

```
    for($col=1;$col<=$fearn;$col++) {
```

```
        echo($fearn);
```

```
    }
```

```
    echo "<br/>";
```

```
}
```

```
?>
```

```
<?php include("footer1.php"); ?>
```

**pyramid22**

```
<?php include("header1.php"); ?>
```



```
<?php include ("font_f.php");?>
```

```
<center><h1>Pyramid22</h1></center>
```

```
<?php
```

```
for($fearn=1;$fearn<=5;$fearn++) {
```

```
    echo("*");
```

```
    for($col=2;$col<=$fearn;$col++) {
```

```
        echo(" ");
```

```
    }
```

```
    for($col=0;$col<=5-$fearn;$col++){
```

```
        echo($fearn);
```

```
    }
```

```
    for($col=0;$col<=4-$fearn;$col++){
```

```
        echo($fearn);
```

```
    }
```

```
    for($col=2;$col<=$fearn;$col++) {
```

```
        echo(" ");
```

```
    }
```

```
        echo("*");

        echo "<br/>";

    }

?>

<?php include("footer1.php"); ?>
```

### **pyramid23**

```
<?php include("header1.php"); ?>

<?php include ("font_f.php");?>

<center><h1>Pyramid23</h1></center>

<?php

for($fearn=1;$fearn<=5;$fearn++) {

    echo($fearn);

    for($col=1;$col<=7-$fearn;$col++) {

        echo("*");

    }

    for($col=2;$col<=$fearn;$col++) {

        echo(" ");
```

```
    }

    echo($fearn);

    echo "<br/>";

}

?>

<?php include("footer1.php"); ?>
```

## **pyramid24**

```
<?php include("header1.php"); ?>

<?php include ("font_f.php");?>

<center><h1>Pyramid24</h1></center>

<?php

for($fearn=1;$fearn<=5;$fearn++) {

    echo($fearn);

    for($scol=1;$scol<=$fearn;$scol++) {

        echo("*");

    }

    for($scol=2;$scol<=$fearn;$scol++) {
```

```

        echo("*");

    }

    for($col=5;$col>=$fearn;$col--) {

        echo($fearn);

    }

    for($col=5;$col>=$fearn;$col--) {

        echo($fearn);

    }

    echo "<br/>";

}

?>

```

```
<?php include("footer1.php"); ?>
```

## **pyramid25**

```
<?php include("header1.php"); ?>
```

```
<?php include ("font_f.php");?>
```

```
<center><h1>Pyramid25</h1></center>
```

```
<?php
```

```
for($fearn=1;$fearn<=5;$fearn++) {
```

```

for($col=1;$col<=5-$fearn;$col++) {

    echo("*");

}

for($col=1;$col<=$fearn;$col++){

    echo(6-$fearn);

}

for($col=2;$col<=$fearn;$col++){

    echo(6-$fearn);

}

for($col=0;$col<=5-$fearn;$col++) {

    echo("*");

}

echo "<br/>";

}

?>

<?php include("footer1.php"); ?>

```

**pyramid26**

```
<?php include("header1.php"); ?>
```

```
<?php include ("font_f.php");?>
```

```
<center><h1>Pyramid26</h1></center>
```

```
<?php
```

```
for($fearn=1;$fearn<=5;$fearn++) {
```

```
    for($scol=0;$scol<=5-$fearn;$scol++) {
```

```
        echo($fearn);
```

```
    }
```

```
    for($scol=1;$scol<=$fearn;$scol++) {
```

```
        echo("*");
```

```
    }
```

```
    echo "<br/>";
```

```
}
```

```
?>
```

```
<?php include("footer1.php"); ?>
```

**pyramid27**

```
<?php include("header1.php"); ?>
```

```
<?php include ("font_f.php");?>
```

```
<center><h1>Pyramid27</h1></center>
```

```
<?php
```

```
for($fearn=1;$fearn<=5;$fearn++) {
```

```
    echo($fearn);
```

```
    for($scol=1;$scol<=$fearn;$scol++) {
```

```
        echo(" ");
```

```
    }
```

```
    for($scol=1;$scol<=$fearn;$scol++) {
```

```
        echo("*");
```

```
    }
```

```
    echo "<br/>";
```

```
}
```

```
?>
```

```
<?php include("footer1.php"); ?>
```

**pyramid28**

```
<?php include("header1.php"); ?>
```

```
<?php include ("font_f.php");?>
```

```
<center><h1>Pyramid28</h1></center>
```

```
<?php
```

```
for($fearn=1;$fearn<=5;$fearn++) {
```

```
    for($col=5;$col>=$fearn;$col--) {
```

```
        echo($col);
```

```
    }
```

```
    for($col=1;$col<=$fearn;$col++) {
```

```
        echo("*");
```

```
    }
```

```
    for($col=2;$col<=$fearn;$col++) {
```

```
        echo("*");
```

```
    }
```

```
    for($col=$fearn;$col<=5;$col++) {
```

```
        echo($col);
```

```
    }
```



```
        echo "<br/>";

    }

?>

<?php include("footer1.php"); ?>

pyramid29

<?php include("header1.php"); ?>

<?php include ("font_f.php");?>

<center><h1>Pyramid29</h1></center>

<?php

for($fearn=1;$fearn<=5;$fearn++) {

    echo($fearn);

    echo("*");

    echo(2+$fearn);

    for($scol=1;$scol<=2+$fearn;$scol++) {

        echo("*");

    }

    echo "<br/>";

}
```

```
?>
```

```
<?php include("footer1.php"); ?>
```

## **pyramid30**

```
<?php include("header1.php"); ?>
```

```
<?php include ("font_f.php");?>
```

```
<center><h1>Pyramid30</h1></center>
```

```
<?php
```

```
for($fearn=1;$fearn<=5;$fearn++) {
```

```
    for($scol=2;$scol<=$fearn;$scol++) {
```

```
        echo(" ");
```

```
    }
```

```
    for($scol=0;$scol<=5-$fearn;$scol++){
```

```
        echo("*");
```

```
    }
```

```
    for($scol=0;$scol<=4-$fearn;$scol++){
```

```
        echo("*");
```

```
    }

    for($col=$fearn;$col>=1;$col--) {

        echo($col);

    }

    echo "<br/>";

}

?>
```

```
<?php include("footer1.php"); ?>
```

## **pyramid31**

```
<?php include("header1.php"); ?>
```

```
<?php include ("font_f.php");?>
```

```
<center><h1>Pyramid31</h1></center>
```

```
<?php
```

```
for($fearn=1;$fearn<=5;$fearn++) {

    for($col=$fearn;$col<=5;$col++) {

        echo($fearn);

    }

}
```

```
        for($col=2;$col<=$fearn;$col++) {

            echo(" ");

        }

        for($col=0;$col<=5-$fearn;$col++) {

            echo("*");

        }

        echo "<br/>";

    }

?>
```

```
<?php include("footer1.php"); ?>
```

## **pyramid32**

```
<?php include("header1.php"); ?>
```

```
<?php include ("font_f.php");?>
```

```
<center><h1>Pyramid32</h1></center>
```

```
<?php
```

```
for($fearn=1;$fearn<=5;$fearn++) {

    for($col=1;$col<=8-$fearn;$col++) {

        echo($col);
```

```
}

for($col=1;$col<=2+$fearn;$col++) {

    echo("*");

}

echo($fearn+2);

echo "<br/>";

}

?>
```

```
<?php include("footer1.php"); ?>
```

### **pyramid33**

```
<?php include("header1.php"); ?>
```

```
<?php include ("font_f.php");?>
```

```
<center><h1>Pyramid33</h1></center>
```

```
<?php
```

```
for($fearn=1;$fearn<=3;$fearn++) {

    for($col=1;$col<=3-$fearn;$col++) {
```

```
        echo(" ");

    }

    for($col=1;$col<=$fearn;$col++){

        echo("*");

    }

    for($col=2;$col<=$fearn;$col++){

        echo("*");

    }

    for($col=1;$col<=3-$fearn;$col++) {

        echo(" ");

    }

    echo "<br/>";

}

for($fearn=2;$fearn>=1;$fearn--) {

    for($col=1;$col<=3-$fearn;$col++) {

        echo(" ");

    }
```

```
        for($col=1;$col<=$fearn;$col++){

            echo("*");

        }

        for($col=2;$col<=$fearn;$col++){

            echo("*");

        }

        for($col=1;$col<=3-$fearn;$col++) {

            echo(" ");

        }

        echo "<br/>";

    }

?>
```

```
<?php include("footer1.php"); ?>
```

#### **pyramid34**

```
<?php include("header1.php"); ?>
```

```
<?php include("font_f.php");?>
```

```
<center><h1>Pyramid34</h1></center>
```

```
<?php
```

```
for($fearn=1;$fearn<=3;$fearn++) {
```

```
    for($col=1;$col<=3-$fearn;$col++) {
```

```
        echo (" ");
```

```
    }
```

```
        echo ("*");
```

```
    for($col=2;$col<=$fearn;$col++){
```

```
        echo ($col);
```

```
    }
```

```
    for($col=$fearn;$col<=$fearn;$col++) {
```

```
        echo ($col);
```

```
    }
```

```
    for($col=$fearn;$col>=2;$col--){
```

```
        echo ($col);
```

```
    }
```



```
        echo ("*");

for($col=1;$col<=3-$fearn;$col++) {

        echo (" ");

    }

    echo "<br>";

}

for($fearn=2;$fearn>=1;$fearn--) {

    for($col=1;$col<=3-$fearn;$col++) {

        echo (" ");

    }

    echo ("*");

    for($col=1;$col<=$fearn;$col++){

        echo ($fearn);

    }

    for($col=2;$col<=$fearn;$col++){
```

```
        echo ($col);

    }

    echo ("*");

    for($col=1;$col<=3-$fearn;$col++) {

        echo (" ");

    }

    echo "<br>";

}

?>

<?php include("footer1.php"); ?>
```

## **pyramid35**

```
<?php include("header1.php"); ?>

<?php include ("font_f.php");?>

<center><h1>Pyramid35</h1></center>

<?php

for($fearn=0;$fearn<=4;$fearn++) {

    echo($fearn+1);
```

```
        echo("*");

        for($col=1;$col<=1;$col++){

            echo($col+$fearn+$fearn);

        }

        echo("*");

        for($col=2;$col<=2;$col++){

            echo($col+$fearn+$fearn);

        }

        echo "<br/>";

    }

?>

<?php include("footer1.php"); ?>
```

## **pyramid36**

```
<?php include("header1.php"); ?>

<?php include("font_f.php"); ?>

<center><h1>Pyramid36</h1></center>
```

```
<?php
```

```
for($fearn=1;$fearn<=3;$fearn++) {
```

```
    for($col=1;$col<=4-$fearn;$col++){
```

```
        echo ($fearn+$col-1);
```

```
    }
```

```
    for($col=1;$col<=$fearn;$col++){
```

```
        echo ("*");
```

```
    }
```

```
    for($col=2;$col<=$fearn;$col++){
```

```
        echo ("*");
```

```
    }
```

```
    for($col=3;$col>=$fearn;$col--){
```

```
        echo ($col);
```

```
    }
```

```
    echo "<br>";
```

```
}
```

```
for($fearn=2;$fearn>=1;$fearn--) {
```

```
    for($col=1;$col<=4-$fearn;$col++){
```

```
        echo ($fearn+$col-1);

    }

    for($col=1;$col<=$fearn;$col++){

        echo ("*");

    }

    for($col=3;$col<=1+$fearn;$col++){

        echo ("*");

    }

    for($col=3;$col>=$fearn;$col--) {

        echo ($col);

    }

    echo "<br>";

}

?>

<?php include("footer1.php"); ?>
```

# เมนูของผู้ใช้ทั่วไป

Aboutme

Printer▼

ลงทะเบียน

สถานที่ท่องเที่ยว▼

Pyramid1-10▼

Pyramid11-20▼

Pyramid21-30▼

Pyramid31-36▼

NorthWind Code▼

Login



## Code

```
<?php } else if(@$_SESSION["status"]=="") { ?>
```

```
<div class="w3-top">
```

```
<div class="w3-bar w3-black w3-card">
```

```
<a class="w3-bar-item w3-button w3-padding-large w3-hide-medium w3-hide-large w3-right"
href="javascript:void(0)" onclick="myFunction()" title="Toggle Navigation Menu"><i class="fa fa-
bars"></i></a>
```

```
<a href="index.php" class="w3-bar-item w3-button w3-padding-large">Aboutme</a>
```

```
<div class="w3-dropdown-hover w3-hide-small">
```

```
<button class="w3-button" title="Printer">Printer<i class="fa fa-caret-down"></i></button>
```

```
<div class="w3-dropdown-content w3-card-4 w3-bar-block">
```

```
<a href="print.php" class="w3-bar-item w3-button">ปริ้นเตอร์</a>
```

```
<a href="print1.php" class="w3-bar-item w3-button">ปริ้นเตอร์อิงค์แท่งรุ่นเล็ก</a>
```

```
<a href="print2.php" class="w3-bar-item w3-button">ปริ้นเตอร์อิงค์แท่งรุ่นใหญ่</a>
```

```
</div>
```

```
</div>
```

```
<a href="Pagepost1.php" class="w3-bar-item w3-button w3-padding-large w3-hide-small">ลงทะเบียน</a>
```

```
<div class="w3-dropdown-hover w3-hide-small">
```

```
  <button class="w3-button" title="สถานที่ท่องเที่ยว">สถานที่ท่องเที่ยว<i class="fa fa-caret-  
down"></i></button>
```

```
  <div class="w3-dropdown-content w3-card-4 w3-bar-block">
```

```
    <a href="ex1.php" class="w3-bar-item w3-button">สถานที่เที่ยวเชียงใหม่</a>
```

```
    <a href="ex.php" class="w3-bar-item w3-button">สถานที่เที่ยวลำปาง</a>
```

```
  </div>
```

```
</div>
```

```
<?php include("prm110.php"); ?>
```

```
<?php include("prm1120.php"); ?>
```

```
<?php include("prm2130.php"); ?>
```

```
<?php include("prm3136.php"); ?>
```

```
<?php include("aaaa.php"); ?>
```

```
  <a href="login.php" class="w3-bar-item w3-button w3-padding-large w3-hide-small">Login</a>
```

```
<?php } ?>
```

## เมนูของ admin

### Code

```
<?php if (@$_SESSION["status"] == "2") {?>
```

```
<div class="w3-top">
```

```
<div class="w3-bar w3-black w3-card">
```

```
<a class="w3-bar-item w3-button w3-padding-large w3-hide-medium w3-hide-large w3-right"
href="javascript:void(0)" onclick="myFunction()" title="Toggle Navigation Menu"><i class="fa fa-
bars"></i></a>
```

```
<a href="index.php" class="w3-bar-item w3-button w3-padding-large">Aboutme</a>
```

```
<a href="Pagepost1.php" class="w3-bar-item w3-button w3-padding-large w3-hide-small">Add User</a>
```

```
<div class="w3-dropdown-hover w3-hide-small">
```

```
<button class="w3-button" title="สถานที่ท่องเที่ยว">สถานที่ท่องเที่ยว<i class="fa fa-caret-
down"></i></button>
```

```
<div class="w3-dropdown-content w3-card-4 w3-bar-block">
```

```
<a href="ex1.php" class="w3-bar-item w3-button">สถานที่เที่ยวเชียงใหม่</a>
```

```
<a href="ex.php" class="w3-bar-item w3-button">สถานที่เที่ยวลำปาง</a>
```

```
</div>
```



</div>

<?php include("prm110.php"); ?>

<?php include("prm1120.php"); ?>

<?php include("prm2130.php"); ?>

<?php include("prm3136.php"); ?>

<?php include("aaaa.php"); ?>

<a href="logout.php" class="w3-bar-item w3-button w3-padding-large w3-hide-small">Logout</a>

<a href="select.php" class="w3-bar-item w3-button w3-padding-large w3-hide-small">แสดงข้อมูล</a>

## เมนูของ User

### Code

```
<?php } else if (@$_SESSION["status"] == "1") { ?>

<div class="w3-top">

<div class="w3-bar w3-black w3-card">

<a class="w3-bar-item w3-button w3-padding-large w3-hide-medium w3-hide-large w3-right"
href="javascript:void(0)" onclick="myFunction()" title="Toggle Navigation Menu"><i class="fa fa-
bars"></i></a>

<a href="index.php" class="w3-bar-item w3-button w3-padding-large">Aboutme</a>

<a href="use_pf.php" class="w3-bar-item w3-button w3-padding-large">User Profile</a>

<div class="w3-dropdown-hover w3-hide-small">

<button class="w3-button" title="Printer">Printer<i class="fa fa-caret-down"></i></button>

<div class="w3-dropdown-content w3-card-4 w3-bar-block">

<a href="print.php" class="w3-bar-item w3-button">ปริ้นเตอร์</a>

<a href="print1.php" class="w3-bar-item w3-button">ปริ้นเตอร์อิงค์แท่งรุ่นเล็ก</a>

<a href="print2.php" class="w3-bar-item w3-button">ปริ้นเตอร์อิงค์แท่งรุ่นใหญ่</a>

</div>

</div>

</div>
```

```
<div class="w3-dropdown-hover w3-hide-small">
```

```
  <button class="w3-button" title="สถานที่ท่องเที่ยว">สถานที่ท่องเที่ยว<i class="fa fa-caret-  
down"></i></button>
```

```
  <div class="w3-dropdown-content w3-card-4 w3-bar-block">
```

```
    <a href="ex1.php" class="w3-bar-item w3-button">สถานที่เที่ยวเชียงใหม่</a>
```

```
    <a href="ex.php" class="w3-bar-item w3-button">สถานที่เที่ยวลำปาง</a>
```

```
  </div>
```

```
</div>
```

```
<?php include("prm110.php"); ?>
```

```
<?php include("prm1120.php"); ?>
```

```
<?php include("prm2130.php"); ?>
```

```
<?php include("prm3136.php"); ?>
```

```
<?php include("aaaa.php"); ?>
```

```
  <a href="logout.php" class="w3-bar-item w3-button w3-padding-large w3-hide-small">Logout</a>
```

จัดทำโดย

นางสาวสุวณีย์ ปัญญา

รหัสนิสิต 600811005

ชั้นปีที่ 3

เสนอ

ผศ. บุรินทร์ รุจจนพันธุ์

มหาวิทยาลัยเนชั่น ภาคการศึกษา1/2562