



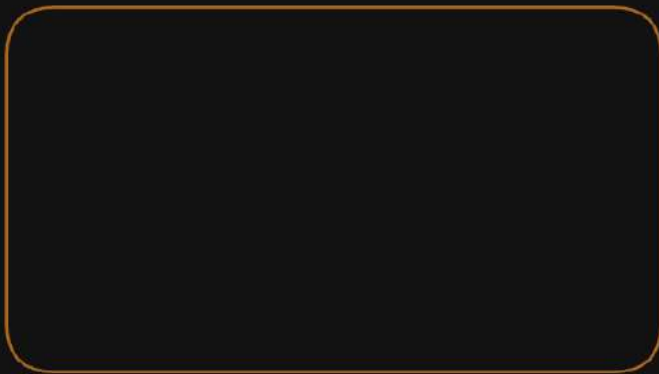


IOC Container

Bean create
Manage bean
Destroy bean

Singleton bean --> Eager

Spring Beans Lifecycle :

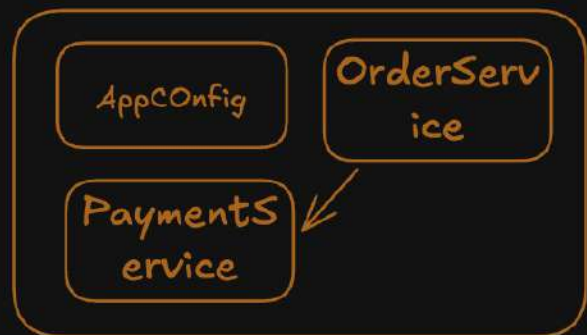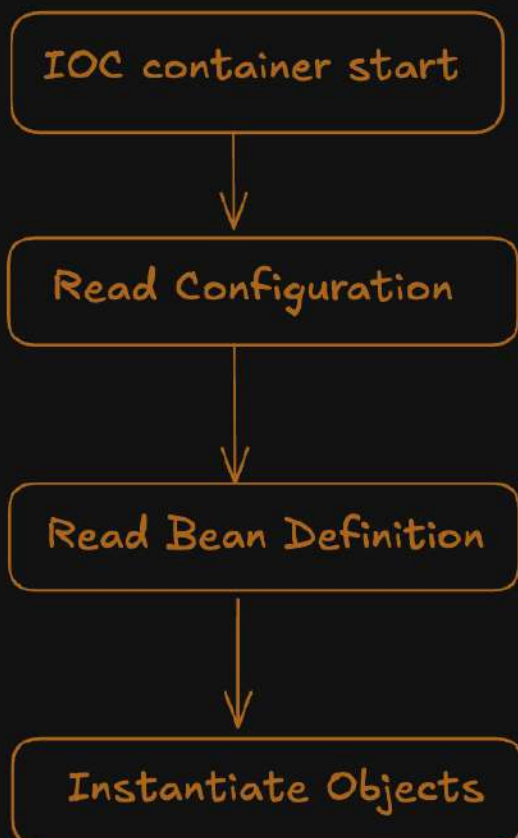

IOC Container

Bean Definition :

beanName : orderService
beanClass : OrderService
scope : singleton
lazy : false
dependency : paymentService

Dependencies are injected

Aware Interfaces are called

Initialization callbacks

Bean is ready to use

Destruction callbacks

Bean is destroyed

1. InitializingBean
2. init Method
3. Post Construct


Destruction callbacks

1. DisposableBean
2. destroyMethod
3. Pre Destroy

Singleton bean --> Eager

Initialization lazy ??

Prototype beans --> Lazy

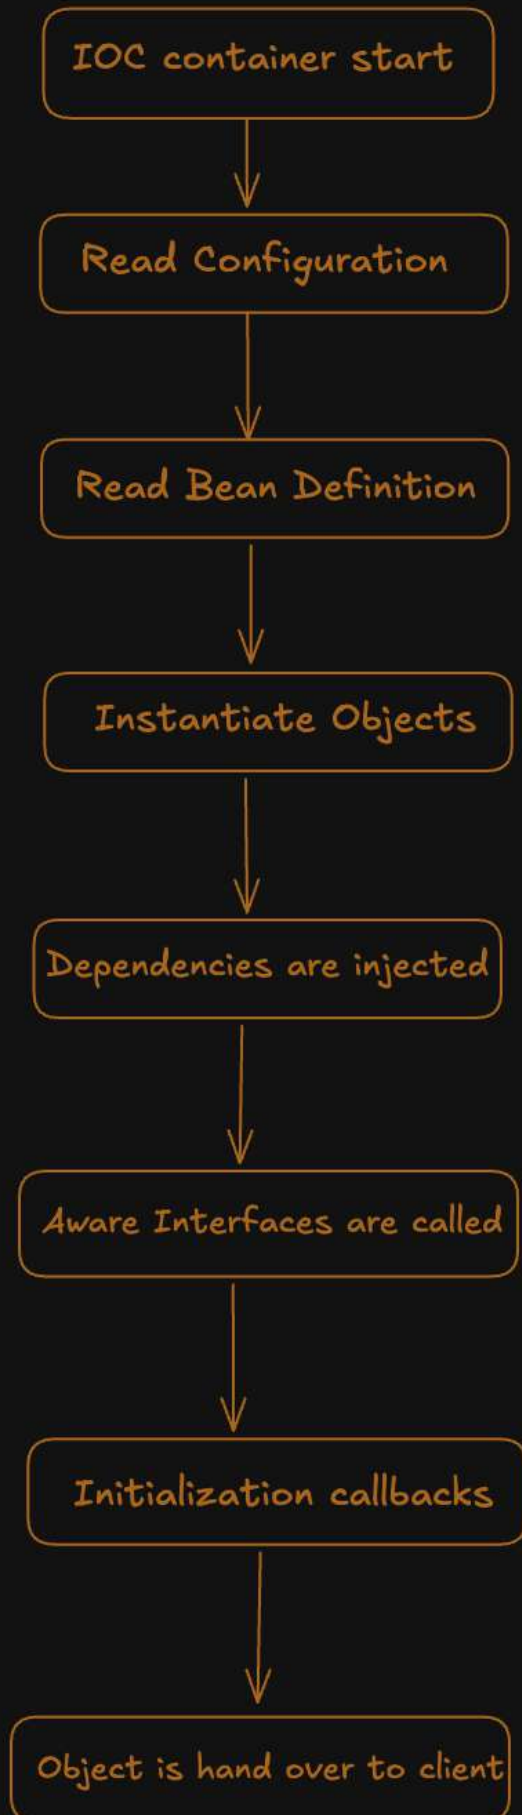

WHY ??

To avoid memory leak