

Laxmi Charitable Trust's
Sheth L.U.J College of Arts & Sir M.V. College of Science and Commerce
Department of Information Technology (B.Sc.I.T Semester V)
Dot .Net Core and Progressive Web Application Practical

Practical – VI

Roll No.: T012	Name: Suyash Karnale
Class: TYIT	Batch: 1
Date of Assignment: 30-7-26	Date/Time of Submission: 30-7-26

- a. **Create a simple website for a College Information Portal and convert it into a Progressive Web Application.**

Code:

manifest.json

```
{
  "name": "HTML TO PWA",
  "short_name": "HTP",
  "start_url": "/",
  "display": "standalone",
  "icons": [
    {
      "src": "icons/icon11.png",
      "sizes": "128x128",
      "type": "image/png",
      "purpose": "any"
    },
    {
      "src": "icons/icon12.png",
      "sizes": "512x512",
      "type": "image/png",
      "purpose": "any"
    }
  ]
}
```

service-worker.js

```
self.addEventListener("install", e => {
  console.log("Service Worker Installed");
});
```

```
self.addEventListener("fetch", e => {
  e.responseWith(fetch(e.request));
});
```

layout.html


```
<link rel="stylesheet" href="~/HTMLtoPWA.styles.css" asp-append-version="true">
<link rel="manifest" href="/manifest.json" />
```

```

@await RenderSectionAsync( scripts , required: false)
<script>
    if ('serviceWorker' in navigator) {
        navigator.serviceWorker.register('/service-worker.js')
    }
</script>
</body>
</html>

```

Output:

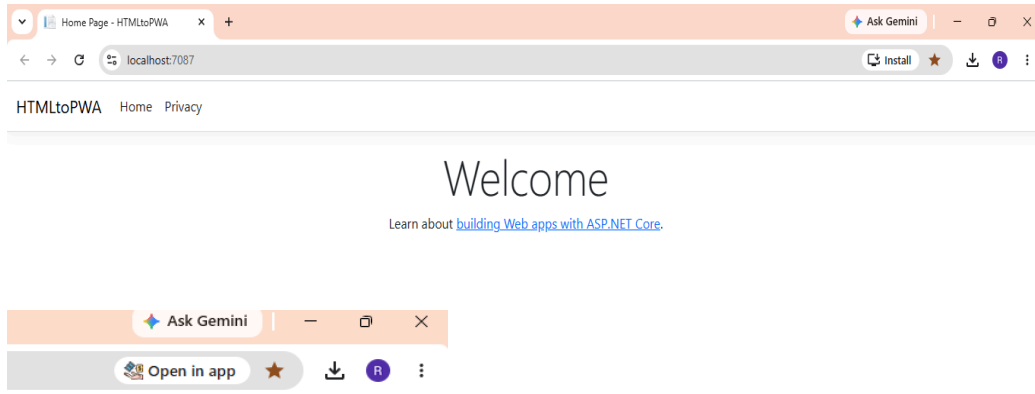

b. Create a PWA that displays a custom offline page when the user is not connected to the internet.

Code:

manifest.json

```

{
  "name": "HTML TO PWA",
  "short_name": "HTP",
  "start_url": "/",
  "display": "standalone",
  "icons": [
    {
      "src": "icons/icon11.png",
      "sizes": "128x128",
      "type": "image/png",
      "purpose": "any"
    },
    {
      "src": "icons/icon12.png",
      "sizes": "512x512",
      "type": "image/png",
      "purpose": "any"
    }
  ]
}

```

```

    }
  ]
}

service.worker
const CACHE = "v1";

self.addEventListener("install", e => {
  e.waitUntil(caches.open(CACHE).then(cache => {
    return cache.addAll([
      "/",
      "/offline.html"
    ]);
  }));
});

self.addEventListener("fetch", (e) => {
  e.respondWith(
    fetch(e.request).catch(() => {
      return caches.match("/offline.html");
    })
  );
});

```

layout.html

```

<link rel="stylesheet" href="../../HTMLtoPWA.styles.css" asp-append-version="true">
<link rel="manifest" href="/manifest.json" />

```

```

@await RenderSectionAsync("Scripts", required: false)
<script>
  if ('serviceWorker' in navigator) {
    navigator.serviceWorker.register('/service-worker.js')
  }
</script>
</body>
</html>

```

Output:



 You're offline