

```
In [1]: import numpy as np
x = np.arange(0,100)
y = x*2
z = x**2
```

Import matplotlib.pyplot as plt and set %matplotlib inline

```
In [3]:
```


Exercise 1

Follow along with these steps:

- Create a figure object called fig using plt.figure()
- Use add_axes to add an axis to the figure canvas at [0,0,1,1]. Call this new axis ax.
- Plot (x,y) on that axes and set the labels and titles to match the plot below:

```
In [4]:
```


```
Out[4]: <matplotlib.text.Text at 0x111534c50>
```

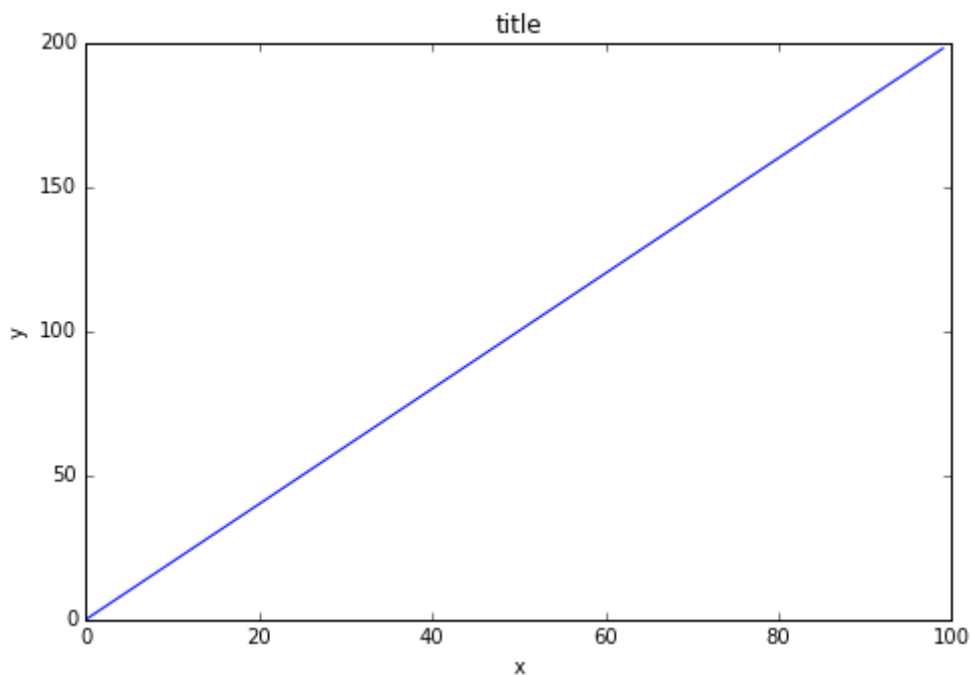

Exercise 2

Create a figure object and put two axes on it, ax1 and ax2. Located at [0,0,1,1] and [0.2,0.5,.2,.2] respectively.


```
In [39]:
```

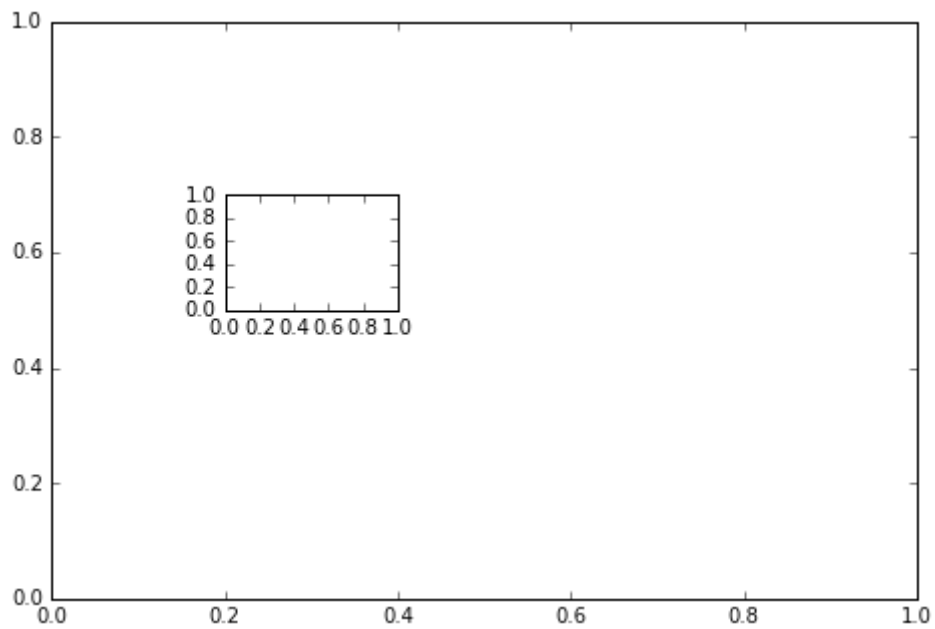

Now plot (x,y) on both axes. And call your figure object to show it.

In [42]:


Out[42]:

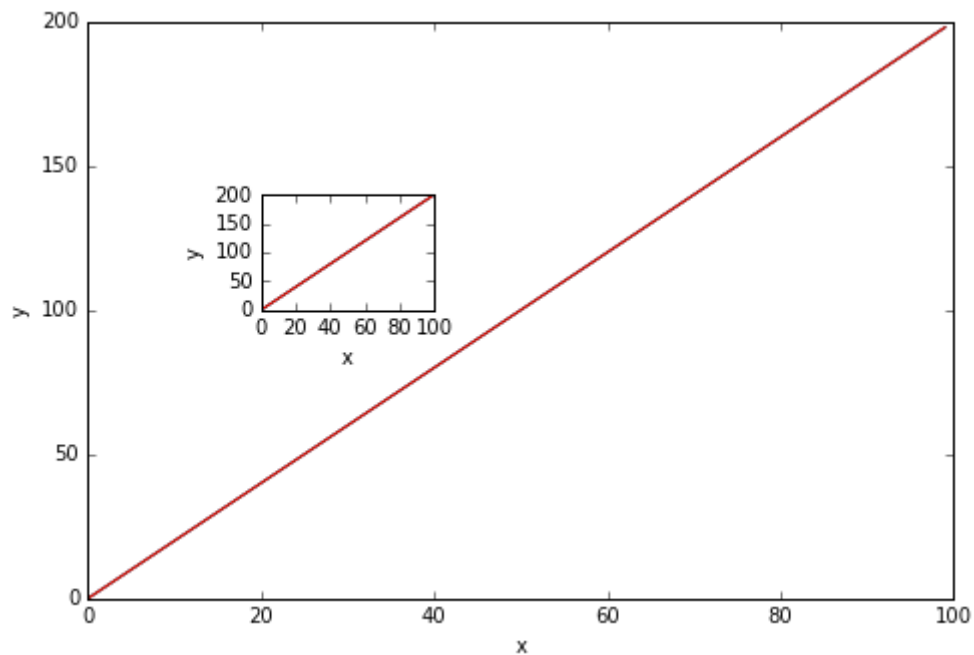

Exercise 3

Create the plot below by adding two axes to a figure object at [0,0,1,1] and [0.2,0.5,.4,.4]


In [6]:

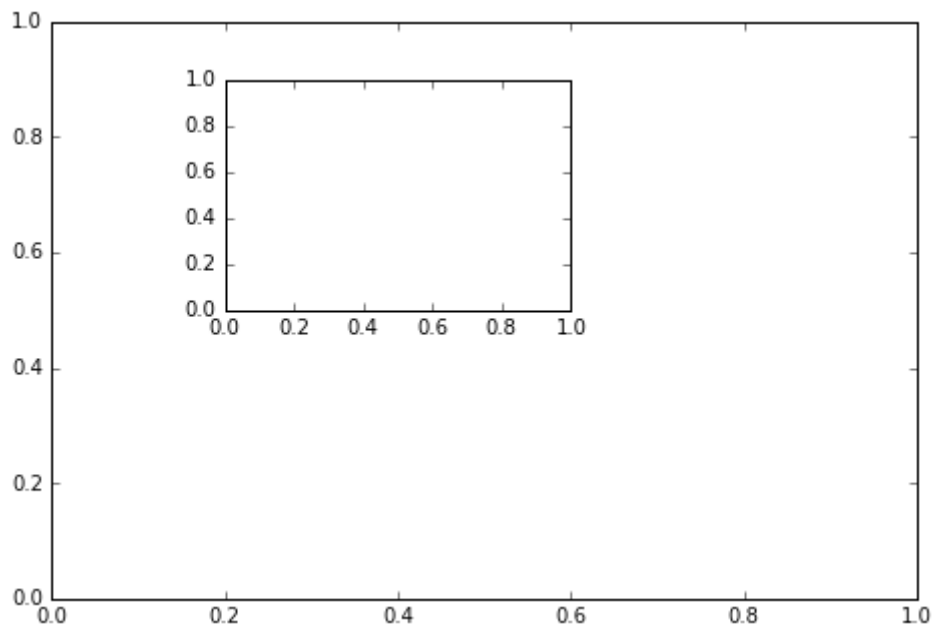


Now use x,y, and z arrays to recreate the plot below. Notice the xlims and y limits on the inserted plot:

In [5]:

Out[5]:

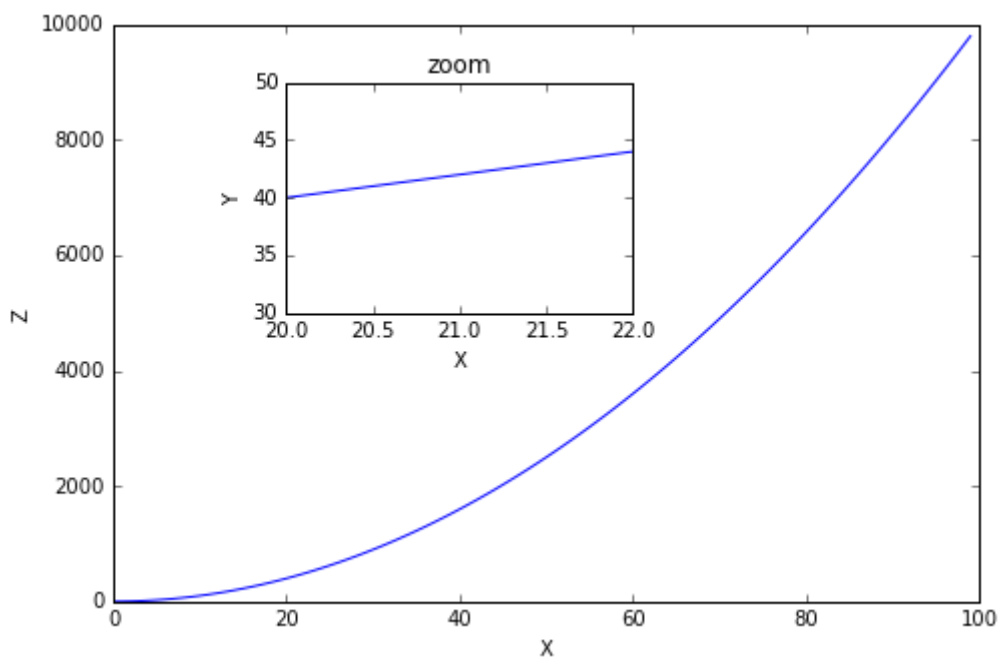


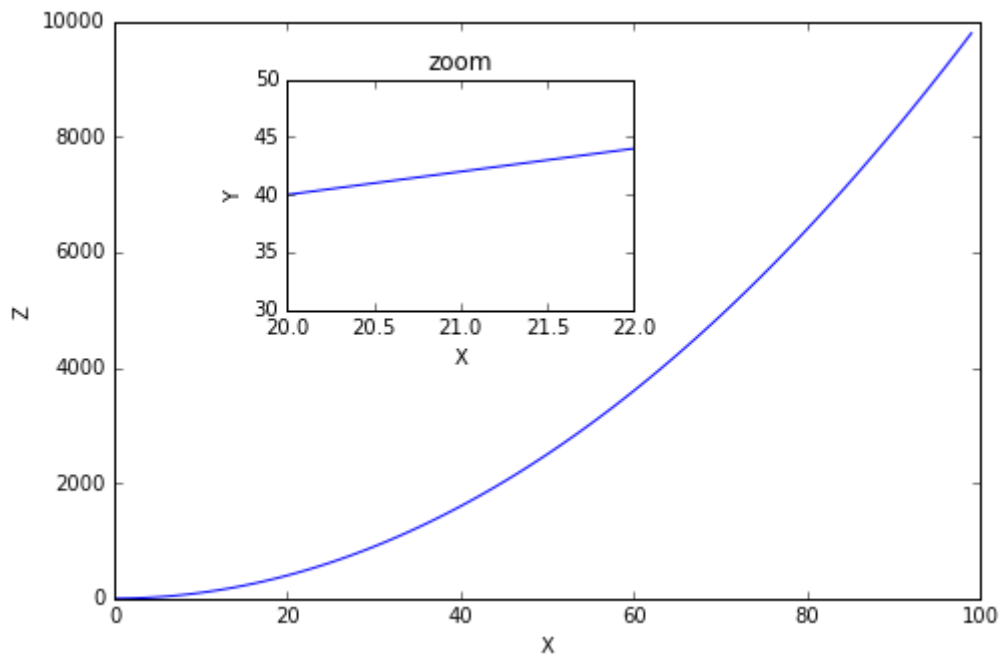

Exercise 4


Use `plt.subplots(nrows=1, ncols=2)` to create the plot below.

In [48]:

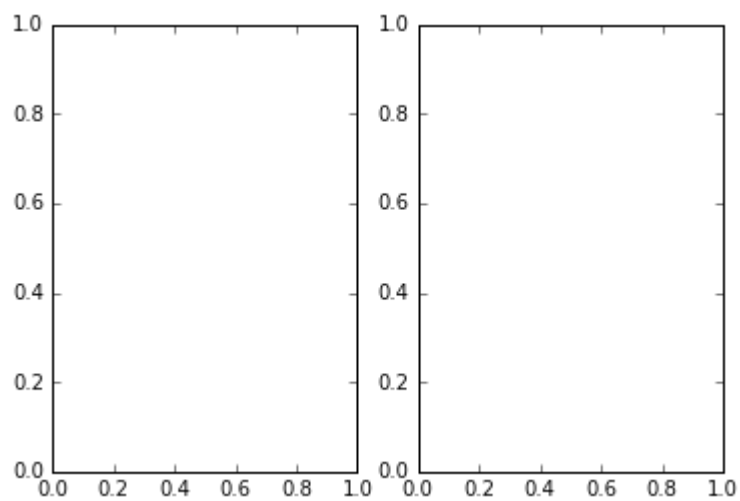

Now plot (x,y) and (x,z) on the axes. Play around with the linewidth and style

In [51]:

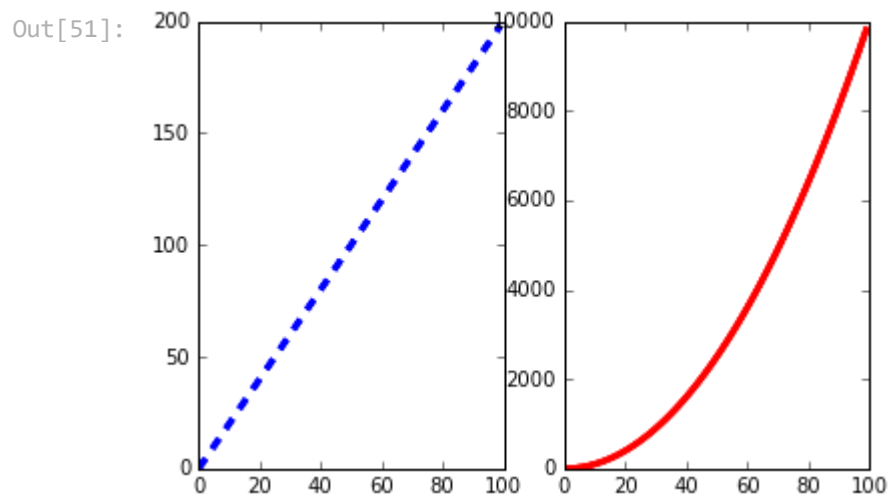

See if you can resize the plot by adding the `figsize()` argument in `plt.subplots()` are copying and pasting your previous code.

In [32]:

<matplotlib.text.Text at 0x1141b4ba8>

Out[32]:

