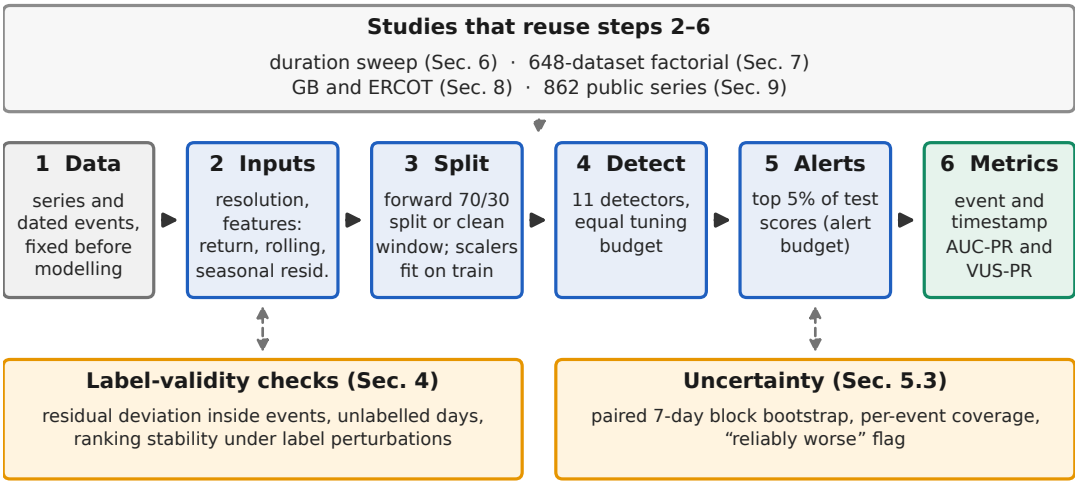
Studies that reuse steps 2–6
duration sweep (Sec. 6) · 648-dataset factorial (Sec. 7)
GB and ERCOT (Sec. 8) · 862 public series (Sec. 9)
1 Data
series and dated events, fixed before modelling
2 Inputs
resolution, features: return, rolling, seasonal resid.
3 Split
forward 70/30 split or clean window; scalers fit on train
4 Detect
11 detectors, equal tuning budget
5 Alerts
top 5% of test scores (alert budget)
6 Metrics
event and timestamp AUC-PR and VUS-PR
Label-validity checks (Sec. 4)
residual deviation inside events, unlabelled days, ranking stability under label perturbations
Uncertainty (Sec. 5.3)
paired 7-day block bootstrap, per-event coverage, “reliably worse” flag