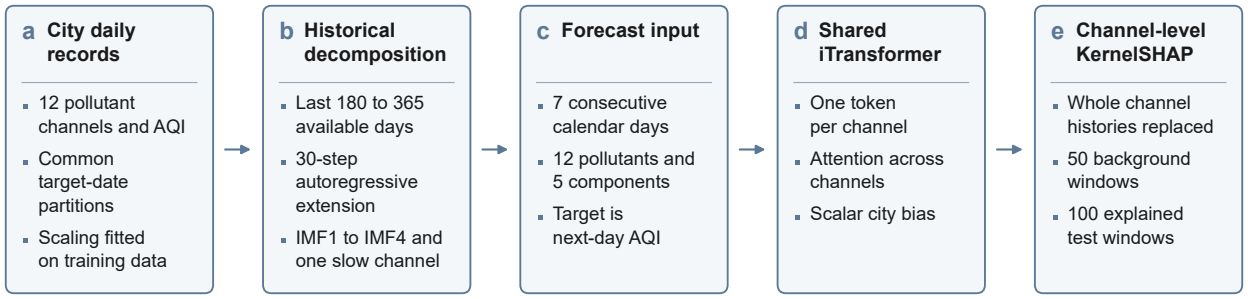
a City daily records
12 pollutant channels and AQI
Common target-date partitions
Scaling fitted on training data
b Historical decomposition
Last 180 to 365 available days
30-step autoregressive extension
IMF1 to IMF4 and one slow channel
c Forecast input
7 consecutive calendar days
12 pollutants and 5 components
Target is next-day AQI
d Shared iTransformer
One token per channel
Attention across channels
Scalar city bias
e Channel-level KernelSHAP
Whole channel histories replaced
50 background windows
100 explained test windows