Project Documentation

Commodore Port Breakout: Cassette Output

Project number: 200

Revision: 0

Date: 12.11.2022

Commodore Port Breakout: Cassette Output Rev. 0

Module Description

Introduction

This assembly provides the edge connector for a Commodore PET Cassette Port. It is also suitable for the C64, C128 and VIC-20 cassette port. The purpose is connecting it to the Cassette Breakout board via a ribbon cable.

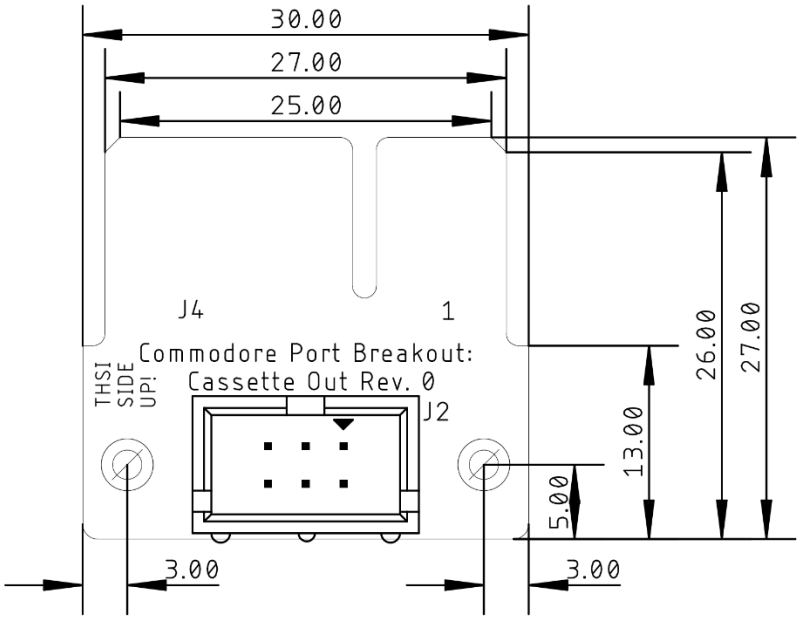

Figure 1: Dimensions of the PCB

Connector Pinout

J2	Cassette Port	J4
1	GND	1
2	+5V	2
3	MOTOR	3
4	READ	4
5	WRITE	5
6	SENSE	6
(1)	GND	A
(2)	+5V	B
(3)	MOTOR	C
(4)	READ	D
(5)	WRITE	E
(6)	SENSE	F

Revision History

Rev. 0

- Prototype

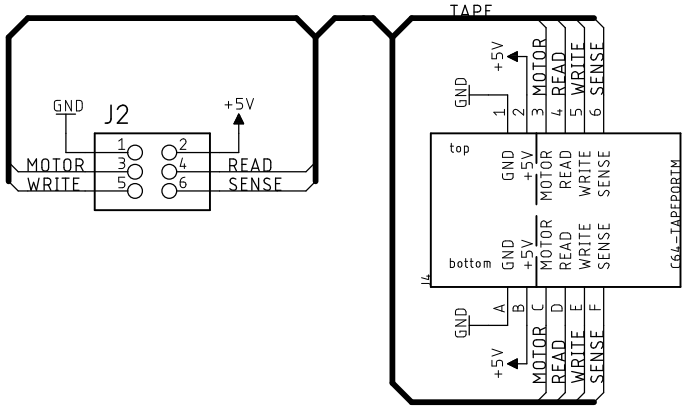

open source hardware

Title:	Commodore Port Breakout: Cassette Out	Doc.-No.:	200-1-01-00
		Draft.:	Sven Petersen
Date:	12.11.2022 19:38	Rev.: 0	Page 1/1
File:	CPB_Cassette_Out		
	http://github.com/svenpetersen1965		A4

Sven Petersen 2022	Doc.-No.: 200-2-01-00	
	Cu: 35µm	Cu-Layers: 2
CPB_Cassette_Out		
12.11.2022 19:37		Rev.: 0
placement component side		

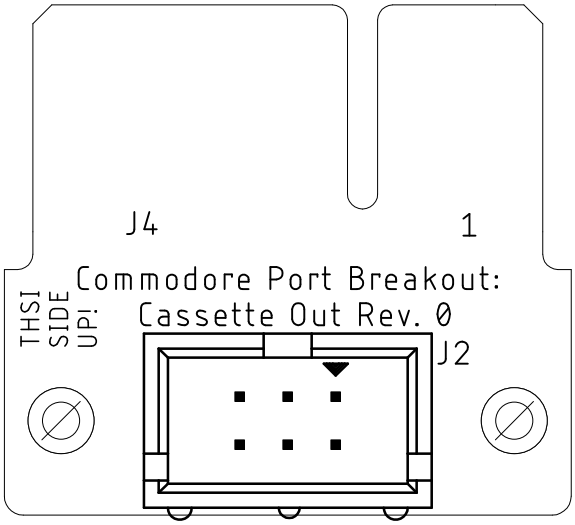

Sven Petersen 2022	Doc.-No.: 200-2-01-00	
	Cu: 35µm	Cu-Layers: 2
CPB_Cassette_Out		
12.11.2022 19:37		Rev.: 0
top	[redacted]	

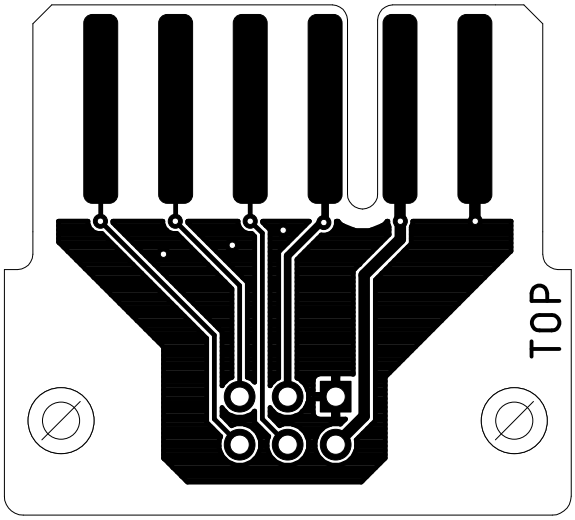

Sven Petersen 2022	Doc.-No.: 200-2-01-00	
	Cu: 35µm	Cu-Layers: 2
CPB_Cassette_Out		
12.11.2022 19:37		Rev.: 0
bottom		

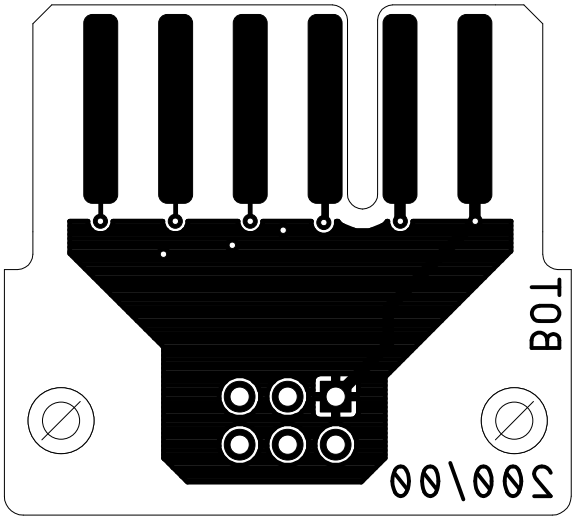

Sven Petersen 2022	Doc.-No.: 200-2-01-00	
	Cu: 35µm	Cu-Layers: 2
CPB_Cassette_Out		
12.11.2022 19:37		Rev.: 0
stopmask component side		

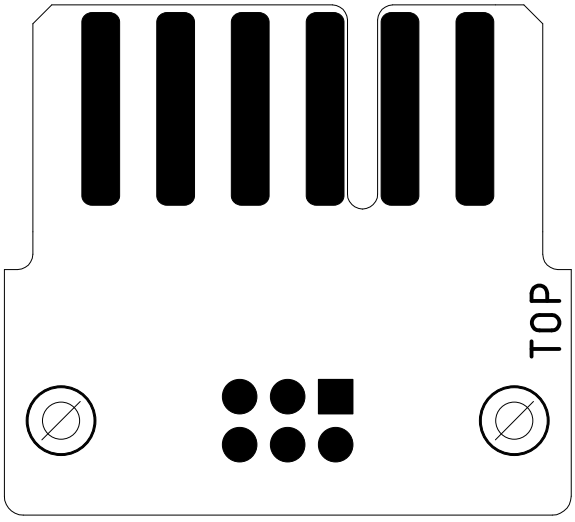

Sven Petersen 2022	Doc.-No.: 200-2-01-00	
	Cu: 35µm	Cu-Layers: 2
CPB_Cassette_Out		
12.11.2022 19:37		Rev.: 0
stopmask solder side		

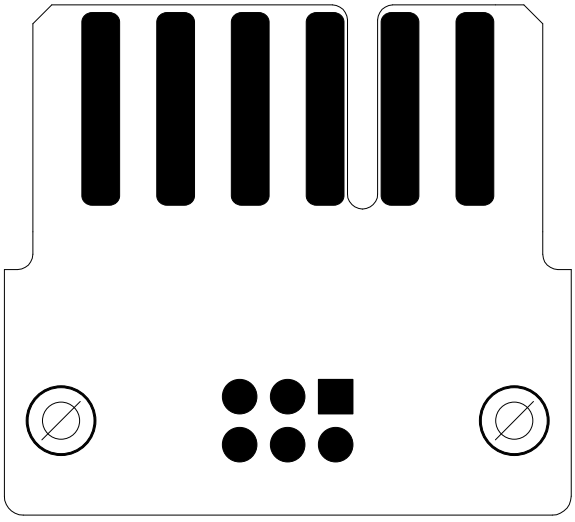

Sven Petersen 2022	Doc.-No.: 200-2-01-00	
	Cu: 35µm	Cu-Layers: 2
CPB_Cassette_Out		
12.11.2022 19:37		Rev.: 0
placement component side measures		

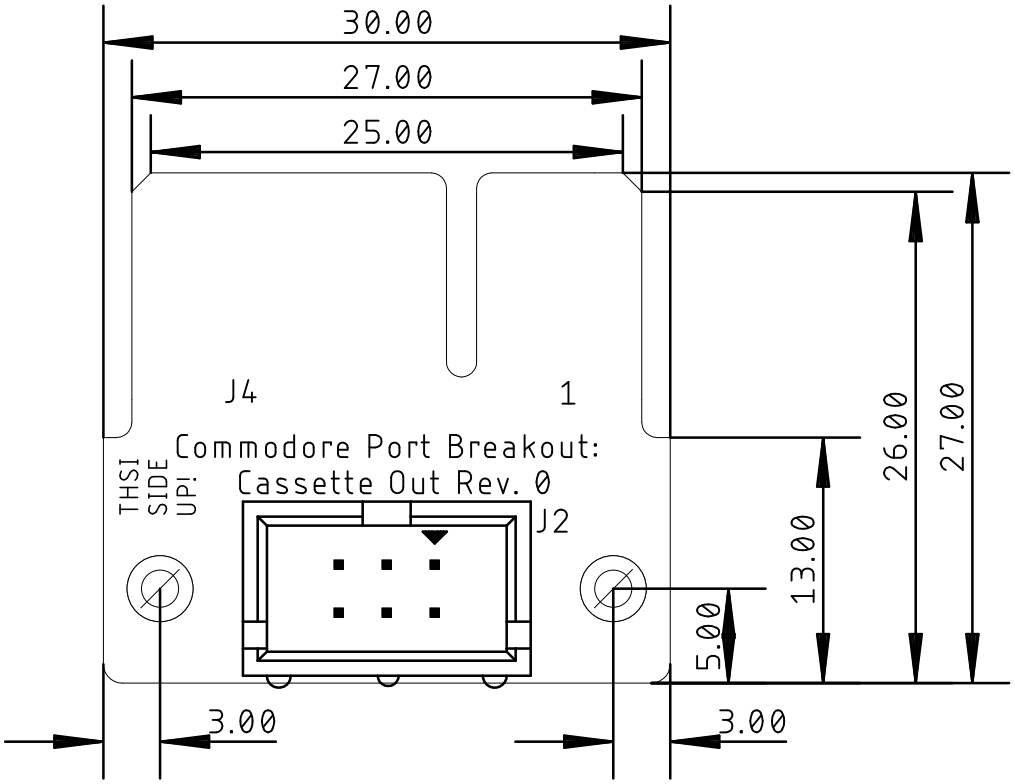

Commodore Port Breakout: Cassette Output Rev. 0
Bill of Material Rev. 0.0

Pos.	Qty	Value	Footprint	Ref.-No.	Comment
1	1	200-2-01-00	2 Layer	PCB Rev. 0	2 layer, Cu 35μ, HASL, 30.0 x 27.0, 1.6mm FR4
2	1	2x3 box connector	2X03WV	J2	e.g. Reichelt WSL 6G