

Sameday Courier - English API documentation

Name	Client API
Description	Sameday Courier English API documentation
Service	https://sameday-api.demo.zitec.com/
Version	3.4
Date	23.12.2025
Table of content	•  Contact •  Foreword ◦ Next steps ◦ Client account •  Documentation ◦ Sandbox testing environment ◦ Terminology used in the documentation ◦ Customer structure in the Sameday system •  The main methods required for integration ◦ Authentication ◦ Pick-up points & contact persons ◦ Types of parcels ◦ Services ▪ Home delivery service (Nextday 24H) ▪ Easybox parcel locker delivery (Locker Nextday) ▪ Locker2Locker ▪ Crossborder 24H ▪ Crossborder Locker Delivery ▪ PUDO Sameday Point ▪ Easybox return shipping (Locker Return) ▪ Extra service options ◦ Counties/provinces, cities and localities ◦ The status of a shipment ▪ URL tracking ▪ API retrieval for each AWB ◦ Downloading the easybox locker list ◦ Show map of easybox lockers ▪ Locker PlugIn SDK (React) - Javascript ◦ Create AWBs •  API call examples ◦ Create AWB with same country delivery (ex: RO to RO), containing one parcel - home delivery (24H) ◦ Create AWB with same country delivery (ex: RO to RO), containing two parcels - home delivery (24H) ◦ Local return shipping with home pickup (Standard Return) ◦ Local parcel exchange shipping (SWAP) ◦ Local Easybox delivery request (Locker Nextday) ◦ Local shipping with personal loading (PDO) in Easybox and delivery to an Easybox (Locker Nextday) ◦ Local return shipping, with delivery in easybox (Return in locker) ◦ International shipping with home delivery (Crossborder HD 24H) ◦ International return shipping with home pickup (Crossborder Standard Return) ◦ International shipping with easybox delivery (Crossborder Locker delivery) ◦ International return shipping, with delivery in easybox (Crossborder Locker return) ◦ National shipping, fixed point shipping (PUDO Nextday) ◦ National shipping, load in locker, deliver to locker (Locker2Locker)

Contact

If you have any questions regarding this manual or the SamedayRESTful Web-Service, please contact the technical support team at app.support@sameday.ro

Foreword

Congratulations! You've just taken the first step toward faster, smarter deliveries with Sameday!

This document will help you go through the technical documentation more easily and to understand the operational flow offered by SamedayRESTful Web-Service, so that in the end you will benefit from an easy integration with our services.

Next steps

In order to start placing shipment orders through the SamedayAPI Service, the following steps should be followed:

1. Obtain a client account on the integration environment.
2. Follow the available technical documentation.
3. Understand the sandbox offered on `smd-api` / documentation (or use a REST client, for example: postman)
4. Migration

Client account

The Sameday team, through your designated sales agent, will help you obtain a client account for your company. In order to obtain such an account, certain information concerning your business will be requested and you will also have to provide a pick-up point and at least one contact person.

Documentation

Sameday offers the following resources for the integration of Webservice:

- The current document
- A sandbox for our demo environment:
 - If you are a customer of Sameday Romania, access: <https://sameday-api.demo.zitec.com/documentation/client>
 - If you are a customer of Sameday Bulgaria, access: <https://sameday-api-bg.demo.zitec.com/documentation/client>
 - If you are a customer of Sameday Hungary, access: <https://sameday-api-hu.demo.zitec.com/documentation/client>
- Examples of the main requests for the delivery services in our portfolio

Sandbox testing environment

SamedayAPI has an available sandbox that offers a testing environment for each API method and it is available in the “sandbox” tab of each method. The sandbox has an https authentication method and the credentials can be requested at app.support@sameday.ro.

Terminology used in the documentation

Explanations for various terms used:

- Parcel - a shipment, a parcel, a parcel, an individual item. A parcel (or several) form a shipment (an awb).
- AWB - refers to shipping. A shipment has a sender, a recipient, reimbursement, etc. An awb/a shipment consists of at least one parcel. The shipment is the one that carries the refund value and generates the transport cost and not the individual packages (parcels).
- AwbNumber is the tracking code of a shipment.
- ParcelNumber is the tracking code of a shipment, parcel, package.
- Type of shipment: it can be parcel, small parcel, or large parcel (meaning oversized parcel).
- Pick-up address/pick-up point/pick-up-point: the address of the customer work point from where a shipment is picked up.
- Third party: a third party from whom an expedition can be raised.
- Customer contact person: contact details for a person responsible for the pick-up point; will appear on the sender's AWB.

Customer structure in the Sameday system

To place a shipment order, the following data are required:

- The pickup points
- Contact persons associated with pick-up points
- Services available for the current customer account
- Mapping of county IDs from the Sameday system
- Mapping locality IDs from the Sameday system

i These data will not change, therefore it is recommended to save them in your database. If these data will change, you will be notified in advance.

i Optional, but recommended in the case of large volumes of shipments: mapping the localities from the Sameday nomenclature.

The main methods required for integration

Authentication

To use the Sameday RESTful Web-Service, you first need a username and a password, provided after the sign-up process.

After a successful authentication, an authentication token will be generated, this token will be used to authorize the other methods used.

The endpoint called to generate this token is POST/api/authenticate.


Authentication will be done by sending two HTTP headers:

- X-AUTH-USERNAME - username will be sent in this header.
- X-AUTH-PASSWORD - the password will be sent in this header.

If the credentials are correct, the server will send an authentication token and an expiration date for this token in json format.

Example answer:

```
1 {  
2   "token": "68831048509fe092c89aed48e2660f5da73e6341",  
3   "expire_at": "2024-09-24 12:54",  
4   "expire_at_utc": "2024-09-24 09:54"  
5 }
```

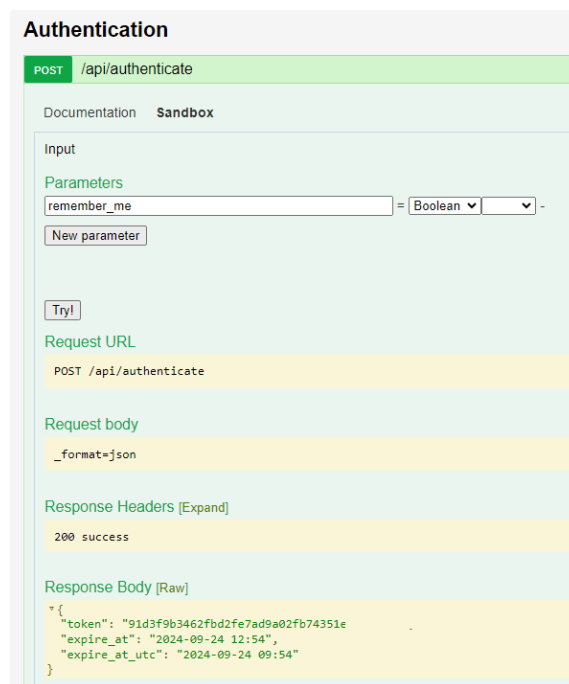

Authentication

POST /api/authenticate

Documentation Sandbox

Input

Parameters

remember_me = Boolean

New parameter

Try!

Request URL

POST /api/authenticate

Request body

_format=json

Response Headers [Expand]

200 success

Response Body [Raw]

```
{  
  "token": "91d3f9b3462fbd2fe7ad9a02fb74351e",  
  "expire_at": "2024-09-24 12:54",  
  "expire_at_utc": "2024-09-24 09:54"  
}
```

Authentication for the rest of the methods will be done by sending the X-AUTH-TOKEN header with the value obtained in the 'token' key.

The lifetime of a token is 12 hours, but if the parameter remember_me=1 is added, this token will be valid for 14 days.

⚠ It is recommended to save the local token, in your own database, and regenerate it with "X" minutes/hours before expiration

✖ The authentication limit is 12 requests/IP/minute

Pick-up points & contact persons

The endpoint used to get these ids is [GET/api/client/pickup-points](#);

If the client has not yet defined a pickup point, or it is not the desired one, a new pickup point can be added using the POST/api/client/pickup-points endpoint or by requesting its addition by the technical support team.

List of pick-up points:

- It is a GET type request
- The url is api/client/pickup-points
- The X-AUTH-TOKEN header will be sent

In the sandbox environment, the request will look similar to:

GET **/api/client/pickup-points** Get all pickup point for a client.

Get pickup points based on current client

Parameters

Name	Description
page	Page number.
integer	Default value : 1
(query)	1
countPerPage	Number of results per page.
integer	Default value : 500
(query)	500

The answer will be as in the screenshot below. Relevant data has been highlighted.

```
{
  "total": 5,
  "currentPage": 1,
  "pages": 1,
  "perPage": 50,
  "data": [
    {
      "id": 1,
      "country": {
        "id": 1,
        "name": "Bucuresti",
        "code": "B"
      },
      "city": {
        "samedayDeliveryAgency": " ",
        "samedayPickupAgency": " ",
        "id": 6,
        "name": "Sectorul 6",
        "extraKM": 0
      },
      "address": " ",
      "defaultPickupPoint": true,
      "pickupPointContactPerson": {
        "id": 1,
        "name": " ",
        "position": " ",
        "phoneNumber": " ",
        "email": " ",
        "defaultContactPerson": true
      },
      "alias": "I",
      "status": true
    },
    {
      "id": 2,
      "country": {
        "id": 26,
        "name": "Ilfov",
        "code": "IF"
      },
      "city": {
        "samedayDeliveryAgency": " ",
        "samedayPickupAgency": " ",
        "id": 25,
        "name": "Chisinau",
        "extraKM": 13
      },
      "address": "Calea Tatiilor nr 17",
      "defaultPickupPoint": false,
      "pickupPointContactPerson": {
        "id": 20,
        "name": " ",
        "position": " ",
        "phoneNumber": " ",
        "email": " ",
        "defaultContactPerson": true
      },
      "alias": "A",
      "status": true
    },
    @(...),
    @(...),
    @(...)
  ]
}
```

Contact persons are associated with pick-up points, so, in the case of the screenshot, we will have a pick-up point with id 2, which has a contact person with id 20.

A customer can have several pick-up points, and a pick-up point can have several contact persons, but only one contact person can be set as default.

If, when creating an AWB, the contact person is not sent, the default contact person will be used; if there is no default contact person, a random contact person will be used to still allow saving the expedition.

Types of parcels

Fiecare cerere de emitere a unui AWB trebuie sa contina si tipul coletului (packageType) expediat.

Coletele se impart in trei categorii:

- PackageType: 0

Represents a parcel weighing between 1.01 kg and 38 kg

- PackageType: 1

Represents a package with a weight between 0.01 kg and 1.00 kg

- PackageType: 2

It is used for overweight shipments, which weigh more than 38 kg

⚠ In the case of overweight shipments, check with the commercial department the existing transshipment solutions.

Services

- For local deliveries
 - 24H - Service ID=7
 - Retur standard - Service ID = 10
 - Locker Nextday - Service ID = 15
 - Locker Retur - Service ID = 24
 - PUDO Nextday - Service ID = 57
- For international deliveries (crossborder)
 - Crossborder HD 24H - Service ID = 28
 - Crossborder Retur standard - Service ID = 29
 - Crossborder Locker delivery - Service ID = 30
 - Crossborder Locker retur - Service ID = 31
 - Crossborder PUDO Nextday - Service ID = 58

📌 Sameday currently delivers internationally as follows:

- Pickup from Romania and delivery in Hungary and Bulgaria
 - The sending customer is a legal entity in RO
 - Bank accounts in HUF and BGN will be required for cash on delivery orders
- Pickup from Hungary and delivery in Romania and Bulgaria
 - The sending customer is a legal entity in HU
 - For cash on delivery orders, bank accounts in RON and BGN will be required
- Pickup from Bulgaria and delivery in Romania and Hungary
 - The sending customer is a legal entity in BG
 - For cash on delivery orders, bank accounts in RON and HUF will be required

⚠ For international deliveries (crossborder), the API request must contain the currency of the destination country

The Sameday services available to the logged-in client can be found by calling the [GET/api/client/services endpoint](#);

ℹ It is not possible to add or allocate services for the client through WebService.

ℹ To activate new services in the customer account, please contact the Sameday commercial department.

List of services:

- It is a GET type request;
- The url is `api/client/services`;
- The X-AUTH-TOKEN header will be sent.

In the sandbox environment, the request will look similar to:

GET `/api/client/services` Get active services for current client.

Parameters

No parameters

Request body

page
integer

Page number.

☐ Send empty value

countPerPage
integer

Number of results per page.

☐ Send empty value

In response, a list of all your available services, paged, will be displayed. The relevant data is highlighted below:

```
{
  "defaultServices": true,
  "serviceOptionalTaxes": []
},
{
  "id": 2,
  "name": "3H",
  "serviceCode": "3H",
  "deliveryType": {
    "id": 1,
    "name": "Sameday"
  },
  "defaultServices": false,
  "serviceOptionalTaxes": []
},
{
  "id": 3,
  "name": "6H",
  "serviceCode": "6H",
  "deliveryType": {
    "id": 1,
    "name": "Sameday"
  },
  "defaultServices": false,
  "serviceOptionalTaxes": [
    {
      "costType": "Fix",
      "id": 17,
      "name": "Taxa selectabila",
      "tax": 10,
      "packageType": 0
    },
    {
      "costType": "Percentage",
      "id": 18,
      "name": "Taxa selectabila 2",
      "tax": 15,
      "packageType": 0
    }
  ]
},
{
  "id": 4,
  "name": "Exclusive",
  "serviceCode": "1H",

```

Home delivery service (Nextday 24H)

You will use this service for all local deliveries to your customers home/office.

The ID for this service is 7.

You will find examples in the [🔗 API call examples](#) chapter.

Easybox parcel locker delivery (Locker Nextday)

The Locker Nextday service is a delivery option that allows parcels to be delivered to lockers.

Here are the main details about the service:

- The service supports cash on delivery and prepaid shipments.

- If a locker is full or unavailable, the courier can redirect the parcel to a backup locker configured on their route.
- Service ID is 15.

You will find examples in the [🔗 API call examples](#) chapter.

Locker2Locker

The Locker2Locker service is a delivery option within the Sameday network that allows parcels to be sent from one locker to another locker. Here are the key points about this service:

- The sender can drop off the parcel in any Sameday locker.
- The parcel will be delivered to the locker chosen by the recipient.
- If the selected locker is not available (e.g., no free slots), the parcel can be redirected to the nearest available locker or delivered to the recipient's address.
- If the parcel is not picked up by the recipient, it will be returned to the sender's original locker.
- API service ID is 51.

You will find examples in the [🔗 API call examples](#) chapter.

Crossborder 24H

The **Crossborder 24H** service enables international home delivery to Romania, Hungary and Bulgaria.

API service ID is 28.

Crossborder Locker Delivery

The **Crossborder Locker Delivery** service enables international easybox parcel locker deliveries to Romania, Hungary and Bulgaria.

API service ID is 30.

PUDO Sameday Point

PUDO/Sameday Point represents the delivery service at partner commercial points, an extensive network that includes (but is not limited to) stores, gas stations and other commercial points.

Two new services have been added to the Sameday IT system:

- PUDO NextDay (Personal pickup from a fixed point), service ID: 57
- Crossborder PUDO NextDay (Personal pickup from an international fixed point), service ID: 58

Considering the diversification of types of fixed locations, the documentation introduces the notion of OOH, which refers to the Out-Of-Home network, which includes both lockers and PUDO points.

By adding these new services, the AWB emission endpoints were adapted to include the two services mentioned above.

In order to have a correct integration that includes these two services, the following aspects will have to be taken into account:

Adding the new parameters oohFirstMile and oohLastMile in the request for an AWB issuance.

- oohFirstMile = this field is used for the personal delivery option of a package and represents the ID of the respective location.
- oohLastMile = this field is used for the option of personal pick-up of a package from a PUDO location and represents the ID of the respective location.

When issuing an AWB, through the POST endpoint: api/awb, the type of location must be taken into account, as follows:

- The PUDO type locations will have the oohType parameter with the value 1, while the easybox type locations will have the oohType parameter with the value 0.
- The easybox type locations have a range of IDs up to the value of 500,000, while the PUDO type locations will have a range of IDs with a value of over 500,000.

i Both pairs of parameters can be used, with the mention that if you want to broadcast on the PUDO service, it is mandatory to use the new OOH parameters.

i It is recommended to use the new parameters for both services, because those previously used will become decommissioned in the future.

To return Out Of Home (Locker + PUDO) locations, a new endpoint was created called [GET /api/client/ooh-locations](#). It will replicate the features of the existing GET/api/client/lockers endpoint.

On the new method, the listingType filter has been added, through which we will return:

- lockers only
- lockers + PUDOs

Also, on the response of the new endpoint, the oohType field was added, as well as specialSchedule, which will contain free days and days with a special schedule.

Additional changes were also made to the status-sync endpoints, which were adapted to include information about the new service, SAMEDAY point.

The affected methods are:

- GET /api/client/status-sync ,
- GET /api/client/xb-status-sync

Thus, in addition to the lockerDetails collection, we will also have a new collection called **oohDetails**.

The returned response will have identical information on both the lockerDetails and oohDetails collections, for AWBs with delivery to lockers (easybox).

For AWBs with delivery to PUDO, we will only have information returned on the oohDetails collection.

Obtain PUDO Sameday Point locations:

- It is a GET request
- The url is [/api/client/ooh-locations](#)
- The X-AUTH-TOKEN header will be sent

GET	/api/client/ooh-locations	Get all Out Of Home locations.
Gets a list with all Out Of Home locations.		
Parameters		
Name	Description	
oohList (query)	List with location ids separated by comma. Example : 1,2,3	1,2,3
listingType integer (query)	0 - only Locker locations; 1 - all OOH (lockers + pudo) locations; Available values : 0, 1	0
countPerPage integer (query)	Number of results per page Default value : 100	100
countryCode (query)	The country ISO code with 2 digits.	countryCode
_locale (query)	Available values : en, ro, hu, bg	
page integer (query)	Page number to return	page

In the sandbox environment, the request will look similar to:

<https://api.sameday.ro/api/client/ooh-locations?oohList=500162&listingType=1&countPerPage=100&countryCode=RO>

Response example:

```
1 {
2   "total": 1,
3   "currentPage": 1,
4   "pages": 1,
5   "perPage": 100,
6   "data": [
7     {
8       "name": "SAMEDAY point Amaradia", => location name
9       "country": "Romania", => location country
10      "countryId": 187,
11      "county": "Dolj", => county/province name
12      "countyId": 18, => county/province ID
```

```

13      "city": "Craiova", => city name
14      "cityId": 10340, => city ID
15      "address": "Str. Amaradia, Nr. 30",
16      "postalCode": "200157",
17      "lat": 44.326978,
18      "lng": 23.792361,
19      "oohId": 500162, => location unique ID; under 500000 = Easybox parcel location; over 500000 = PUDD Sameday Point location
20      "oohType": 1, => 0 = Easybox Parcel locker; 1 = PUDD location
21      "supportedPayment": 1, => 0 = location does not accept card payment; 1 = location accepts card payment
22      "clientVisible": 1,
23      "deliveryLogisticLocationId": 225, => internal Sameday information
24      "deliveryLogisticLocation": "DJ_CRAIOVA_LN_A03", => internal Sameday information
25      "occupancyLevel": 0, => internal Sameday information
26      "email": null,
27      "phone": null,
28      "oohRoute": "DJA03-R07", => internal Sameday information
29      "schedule": [
30          {
31              "day": 7,
32              "openingHour": "09:00",
33              "closingHour": "20:00"
34          },
35          {
36              "day": 6,
37              "openingHour": "09:00",
38              "closingHour": "20:00"
39          },
40          {
41              "day": 5,
42              "openingHour": "09:00",
43              "closingHour": "20:00"
44          },
45          {
46              "day": 4,
47              "openingHour": "09:00",
48              "closingHour": "20:00"
49          },
50          {
51              "day": 3,
52              "openingHour": "09:00",
53              "closingHour": "20:00"
54          },
55          {
56              "day": 2,
57              "openingHour": "09:00",
58              "closingHour": "20:00"
59          },
60          {
61              "day": 1,
62              "openingHour": "09:00",
63              "closingHour": "20:00"
64          }
65      ],
66      "specialSchedule": [],
67      "photos": []
68  }
69 ]
70 }

```

Easybox return shipping (Locker Return)

Procedure:

- The buyer will access the online store and selects to return the product in an Easybox. Note: Each online store will implement the necessary validations, depending on the specifics of the store (eligible products, return period, etc.)
- The AWB will be issued with pick-up from the third party. For the thirdParty, the buyer's data will be sent, and for the recipient, the customer's data (where the package will be delivered) will be sent

It will be necessary to send the date by which the buyer can load the package into the locker (eligibilityDate). If the buyer does not load the return into the locker by that date, we will automatically cancel the order. It will be marked with the status Canceled locker order - reason Expiry date

- It would be ideal to send the dimensions of the package in order to be able to calculate the type of box that we will open for the customer when it arrives at easybox. If the dimensions cannot be sent, we will set the default box S. If the packaged product will be larger than the calculated box type, they will have the option to request a larger box. If it does not fit even in the largest box, the buyer will be able to cancel the order. It will be marked with the status Order canceled locker – reason Canceled by sender at locker

- When creating the AWB we will return the charge code (lockerReturnChargeCode) in response. You will need to have a flow through which you can send the return code to the customer, via email or SMS.

Extra service options

Extra service options are complementary to the transport services and can be added on request.

The most common extra options are the following:

- Parcel opening (OPCG)
- Exchange parce (SWAP)
- Document return (RDOC)
- Personal delivery at a fixed point (PDO)

 It is not possible to add or assign extra options for the client through the WebService.

 **If the desired extra options are not visible on your account, please contact the Sameday commercial department.**

List of extra options:

- It is a GET type request
- The URL is api/client/services;
- The X-AUTH-TOKEN header will be sent

In response, all services and extra options active on the account will be displayed. Extra options for transport services are displayed in the serviceOptionalTaxes parameter. Select the appropriate value depending on the package type in the request (packageType: 0, 1 or 2).

```
{
  "id": 15,
  "name": "Locker NextDay",
  "serviceCode": "LN",
  "deliveryType": {
    "id": 2,
    "name": "NextDay"
  },
  "defaultServices": false,
  "serviceOptionalTaxes": [
    {
      "costType": "Procentual",
      "name": "Predare personala in punct fix",
      "taxCode": "PDO",
      "id": 357191,
      "tax": -10,
      "packageType": 1
    }
  ]
}
```

 The values in the field - serviceOptionalTaxes "id" - are unique for each customer account. When implementing the desired extra option, use the ids returned by the API response.

Counties/provinces, cities and localities

 To avoid possible sorting errors, it is recommended to map the Sameday county and locality nomenclature with the client's nomenclature, and when creating an AWB to send the Sameday county ID and locality ID.

The Sameday system allows the following variants:

- The locality ID from the Sameday system - in which case the shipment will enter the operational flow directly
- The name of the locality - for which an automatic mapping will be attempted based on some text dictionaries with the localities in the Sameday nomenclature; if this process fails, the shipment will enter a manual review process and Sameday operators will map the name sent with a locality from the nomenclature

 It is recommended to contact the Sameday support team if you notice inconsistencies in the nomenclature of counties/localities.

List of counties:

- It is a GET request
- The url is **api/geolocation/county**
- The X-AUTH-TOKEN header will be sent

In the sandbox environment, the request will look similar to:

GET

/api/geolocation/county

Get all counties.

Gets paginated list of counties. Parameters are used for filtering.

Parameters

Name	Description
name string (query)	name
countryCode string (query)	countryCode
page integer (query)	Page number. Default value : 1 1
countPerPage integer (query)	Number of results per page. Default value : 500 500

The answer will be similar to the one in the image below, and the id and name details are relevant.

Response Body [Raw]

```

{
  "total": 43,
  "currentPage": 1,
  "pages": 9,
  "perPage": 5,
  "data": [
    {
      "id": 2,
      "name": "Alba",
      "code": "AB"
    },
    {
      "id": 3,
      "name": "Arad",
      "code": "AR"
    },
    {
      "id": 4,
      "name": "Arges",
      "code": "AG"
    },
    {
      "id": 5,
      "name": "Bacau",
      "code": "BC"
    },
    {
      "id": 6,
      "name": "Bihor",
      "code": "BH"
    }
  ]
}

```

List of localities:

- It is a GET request
- The url is **api/geolocation/city**
- The X-AUTH-TOKEN header will be sent

In the sandbox environment, the request will look similar to:

GET

/api/geolocation/city

Get all cities.

Gets paginated list of cities. Parameters are used for filtering.

Name	Description
name string (query)	name
county string (query)	county
postalCode string (query)	postalCode
countryCode string (query)	countryCode
page integer (query)	1
countPerPage integer (query)	500

Name, county, postalCode, page, countPerPage filters can also be applied, examples:

- name: Sector (and all cities containing the substring 'sector' will be returned)
- county: Bucuresti (and all the cities associated with Bucuresti county will be returned)
- postalCode: 032 (and all cities with a postal code containing 032 will be returned)

The answer will be similar to the one in the image below, and the id and name details are relevant.

Response Body [Raw]

```

{
  "total": 6,
  "currentPage": 1,
  "pages": 1,
  "perPage": 500,
  "data": [
    {
      "samedayDeliveryAgencyId": 3,
      "samedayDeliveryAgency": "B_SEMA_2H_A03",
      "samedayPickupAgency": "B_SEMA_2H_A03",
      "nextDayDeliveryAgencyId": 1,
      "nextDayDeliveryAgency": "B_MOGOSOIAIA_A01",
      "nextDayPickupAgency": "B_MOGOSOIAIA_A01",
      "whiteDeliveryAgencyId": 64,
      "whiteDeliveryAgency": "B_SEMA_ALBE_A04",
      "whitePickupAgency": "B_SEMA_ALBE_A04",
      "logisticCircle": "Resedinta",
      "country": {
        "id": 187,
        "name": "Romania",
        "code": "RO"
      },
      "id": 1,
      "name": "Sectorul 1",
      "county": {
        "id": 1,
        "name": "Bucuresti",
        "code": "B"
      },
      "postalCode": "010011",
      "extraKM": 0,
      "village": "Sectorul 1",
      "brokerDelivery": 0
    }
  ]
}

```

The status of a shipment

To find out the current status of a shipment, Sameday provides several endpoints, depending on the needs of each customer.

URL tracking

The first option is by adding a tracking link to the Sameday website.

The URL is of the form <https://sameday.ro/#awb=> where after the equal sign, the AWB number of the shipment will be filled.

API retrieval for each AWB

If you are generating AWBs for your local market (examples: RO-RO, HU-HU, BG-BG), use [GET /api/client/status-sync](#)

If you are generating AWBs from your local market and delivery crossborder (delivery to another country: examples: RO-HU, HU-RO, etc), use [GET /api/client/xb-status-sync](#)

- It is a GET request
- Returns the status transitions which took place between 2 timestamps for the current client. * The maximum interval between the 2 timestamps is 2 hours. The results will be paginated
- The X-AUTH-TOKEN header will be sent

In the sandbox environment, the request will look similar to:

GET	/api/client/xb-status-sync
Returns the cross border status transitions which took place between 2 timestamps	
Returns the cross border status transitions which took place between 2 timestamps	
Parameters	
Name	Description
page integer (query)	Page number. Default value : 1
countPerPage integer (query)	Number of results per page. Default value : 500
startTimestamp string(\$timestamp) (query)	startTimestamp
endTimestamp string(\$timestamp) (query)	endTimestamp

The answer will be similar to the one in the image below:

```
Response Body [Raw]
{
  "currentPage": 1,
  "perPage": 500,
  "data": [
    {
      "status": "Colet livrat",
      "statusId": 9,
      "statusLabel": "Colet livrat",
      "statusState": "Colete livrate",
      "transitLocation": "",
      "statusDate": "2022-04-20T17:57:53+03:00",
      "parcelAwbNumber": "1SDY24104041561001",
      "createdBy": 3,
      "reasonId": "",
      "reason": "",
      "inReturn": false,
      "itemsNo": null,
      "parcelDetails": "https://api.sameday.ro/api/client/parcel/1SDY24104041561001/status-history",
      "damageCheck": {
        "id": 0,
        "label": "Fara verificare"
      }
    },
    {
      "status": "In tranzit spre depozit",
      "statusId": 7,
      "statusLabel": "In tranzit spre depozit",
      "statusState": "Colete predate curier",
      "transitLocation": "Rudeni",
      "statusDate": "2022-04-20T17:55:41+03:00",
      "parcelAwbNumber": "1SDY24103875045001",
      "createdBy": 1,
      "reasonId": "",
      "reason": "",
      "inReturn": false,
      "itemsNo": null,
      "parcelDetails": "https://api.sameday.ro/api/client/parcel/1SDY24103875045001/status-history",
      "damageCheck": {
        "id": 0,
        "label": "Fara verificare"
      }
    }
  ]
}
```

The endpoint through which the easybox locker list can be retrieved are [GET/api/client/lockers](#) or [GET/api/client/ooh-locations](#).

⚠ Please note that [GET/api/client/lockers](#) will be deprecated. Please implement [GET/api/client/ooh-locations](#).

- It is a GET request.
- The X-AUTH-TOKEN header will be sent.

In the sandbox environment, the request will look similar to:

GET

/api/client/ooh-locations

Get all Out Of Home locations.

Gets a list with all Out Of Home locations.

Name	Description
oohList (query)	List with location ids separated by comma. 1,2,3
listingType integer (query)	0 - only Locker locations; 1 - all OOH (lockers + pudo) locations; 0
countPerPage integer (query)	Number of results per page 100
countryCode (query)	The country ISO code with 2 digits. RO
_locale (query)	--
page integer (query)	Page number to return page

The response will be paginated and will look similar to the one below, where the total number of lockers, the number of pages will be returned. By default, 500 lockers per page will be returned.

i Only the available locations will be displayed. If a location was deactivated, it will not be displayed by the endpoint.

```

1 {
2   "total": 4918,
3   "currentPage": 1,
4   "pages": 4918,
5   "perPage": 1,
6   "data": [
7     {
8       "name": "easybox OMV Belu",
9       "country": "Romania",
10      "countryId": 187,
11      "county": "Bucuresti",
12      "countyId": 1,
13      "city": "Sectorul 4",
14      "cityId": 4,
15      "address": "Sos. Oltenitei, Nr. 2",
16      "postalCode": "044501",
17      "lat": 44.402018,
18      "lng": 26.097853,
19      "oohId": 2,
20      "oohType": 0,
21      "supportedPayment": 1,
22      "clientVisible": 1,
23      "deliveryLogisticLocationId": 354,
24      "deliveryLogisticLocation": "B_SEMA_LN_A12",
25      "occupancyLevel": 1,
26      "email": null,
27      "phone": null,
28      "oohRoute": "BA12-R45",
29      "schedule": [
30        {
31          "day": 1,
32          "openingHour": "00:00",
33          "closingHour": "23:59"

```

```

34     },
35     {
36         "day": 2,
37         "openingHour": "00:00",
38         "closingHour": "23:59"
39     },
40     {
41         "day": 3,
42         "openingHour": "00:00",
43         "closingHour": "23:59"
44     },
45     {
46         "day": 4,
47         "openingHour": "00:00",
48         "closingHour": "23:59"
49     },
50     {
51         "day": 5,
52         "openingHour": "00:00",
53         "closingHour": "23:59"
54     },
55     {
56         "day": 6,
57         "openingHour": "00:00",
58         "closingHour": "23:59"
59     },
60     {
61         "day": 7,
62         "openingHour": "00:00",
63         "closingHour": "23:59"
64     }
65 ],
66 "specialSchedule": [],
67 "photos": [
68     {
69         "1x": "/locker/image/17037/1x",
70         "2x": "/locker/image/17037/2x",
71         "small": "/locker/image/17037/small"
72     },
73     {
74         "1x": "/locker/image/17038/1x",
75         "2x": "/locker/image/17038/2x",
76         "small": "/locker/image/17038/small"
77     }
78 ]
79 }
80 ]
81 }


```

Show map of easybox lockers

Locker PlugIn SDK (React) - Javascript


By installing and using the SDK developed by Sameday, you will reduce both the development time of your own solution on your site, as well as the costs of this development.

- The main functionalities developed in the plugin are:

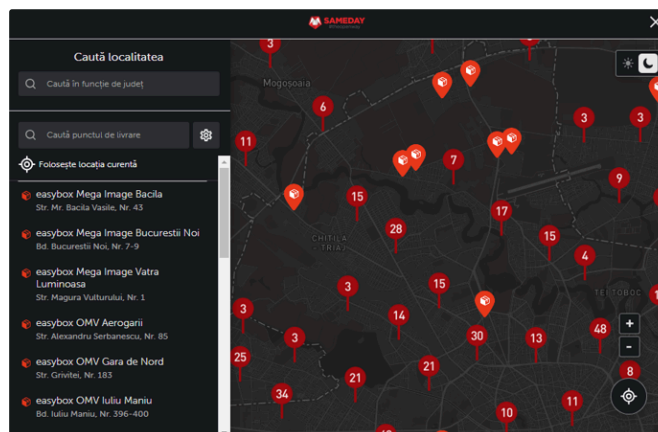


- Filter lockers by the following criteria: County, Easybox Name

Example: search for Sectorul 1 - Bucuresti

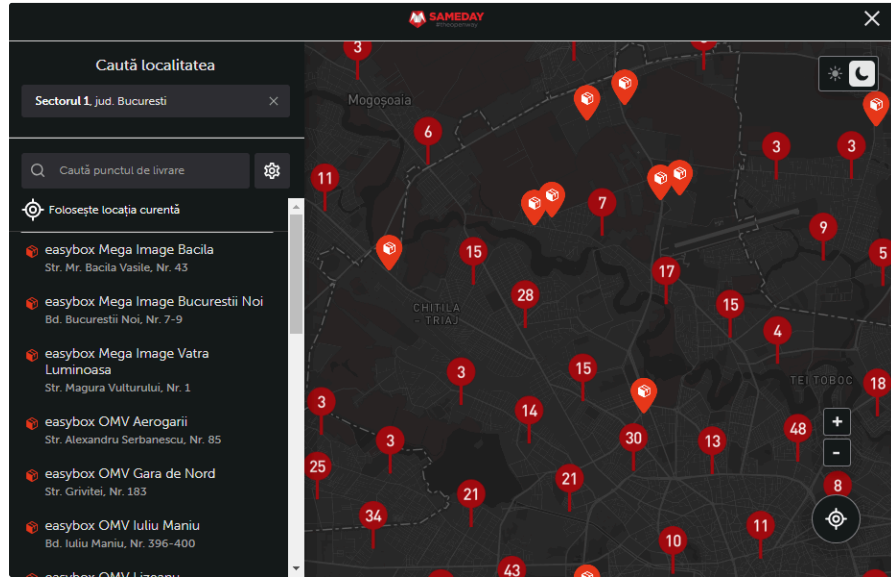


- Displaying lockers based on user location and zoom in / zoom out option, day mode / night mode

Example: zoomed in, dark mode

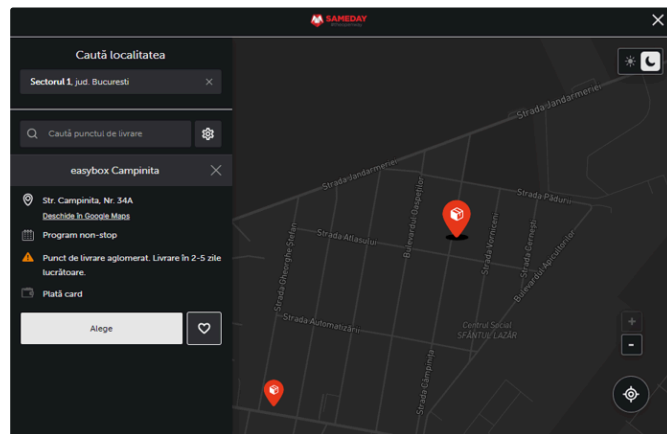

Example: zoomed in map, light mode

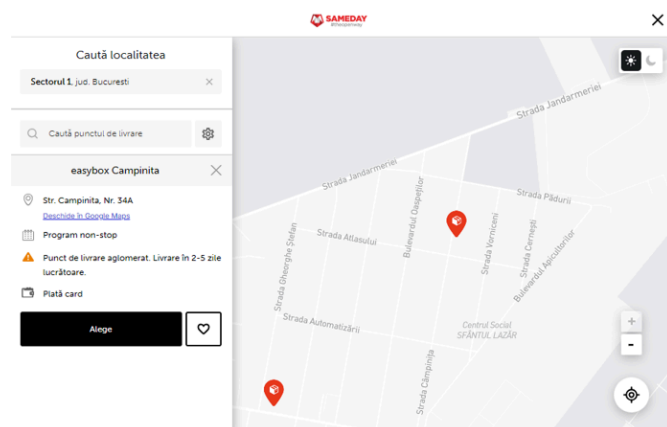

⚠ The banner "Congested delivery point. Delivery in x days" represents an estimate of delivery to the respective Easybox.

ℹ To display all the details, click on the desired Easybox. You will be shown the Easybox address, working hours, delivery estimate, and the cash on delivery payment options available at Easybox (card payment).

Installation steps are available at <https://cdn.sameday.ro/locker-plugin/techdoc.html>

✔ After installing the SDK, please send the domains (test and production) to the technical support team, in order to generate and provide the clientId necessary to initialize the map.

Create AWBs

ℹ AWBs can be created using the `api/awb` method, which requires authentication and a valid payload containing shipment details.

Below you will find a list of parameters accepted by the `api/awb` method:

pickupPoint *required*

string(\$pickupPoint id)

Client pickup point ID - represents the warehouse ID from where the awbs are collected by Sameday.

returnLocationId *optional*

string(\$pickupPoint id)

Client return pickup point ID - represents the warehouse ID from where the awbs are returned by Sameday in case of failed delivery. This location id can be different vs the pickupPoint id. If the value is not sent, awbs will be returned to the warehouse from which they were collected.

contactPerson *optional*

string(\$contactPerson id)

Client contact person ID

packageType *required*

integer

Package Type: 0 → package (standard dimension packages), 1 → small package (such as an envelope), 2 → large package (such as a freezer, etc)

packageNumber

integer

Number of packages; If this parameter is missing from the request, the awb will be considered incomplete

packageWeight *required*

number

Total package weight (kg)

service *required*

string(\$services id)

Service ID (see the documentation for method: `/api/client/services`)

awbPayment *required*

number

AWB payment (Who pays) 1 → client. By client it means the company that has contract with Sameday. Can only have value 1.

cashOnDelivery *required*

number

Cash on delivery (can be 0). If the awb has no cashOnDelivery, you must send 0.

cashOnDeliveryReturns *optional*

number

Who collects the cash on delivery amount; Optional parameter with a default value of 1 → COD collected by the client;

insuredValue *required*

number

Insured value for awb (all packages). If you do not want insurance, send 0.

thirdPartyPickup *required*

integer

Pickup from a third party, not one of the client's pickup points. 1 → third party pickup, 0 → otherwise

thirdParty

object | (object)

Will become mandatory if the expedition is picked up from a third party.

```

1 {
2   "companyIban": "string",
3   "companyName": "string",
4   "wantsInvoice": 0,
5   "county": "string",
6   "city": "string",
7   "name": "string",
8   "personType": 0,
9   "address": "string",
10  "service": 0,
11  "companyOnrcNumber": "string",
12  "phoneNumber": "string",
13  "postalCode": "string",
14  "companyBank": "string",
15  "companyCui": "string",
16  "countyString": "string",
17  "cityString": "string",
18  "contactEmail": "string"
19 }

```

serviceTaxes *optional*

array<string>(\$[serviceTaxes id])

Optional field. Specific for certain clients (see the documentation for method: /api/client/services).

awbRecipient *required*

object

```

1 {
2   "companyIban": "string", optional
3   "companyName": "string", optional
4   "county": "string", required
5   "city": "string", required
6   "name": "string", required
7   "personType": 0, required
8   "address": "string", required
9   "service": 0, optional
10  "companyOnrcNumber": "string", optional
11  "phoneNumber": "string", required
12  "postalCode": "string", optional
13  "companyBank": "string", optional
14  "companyCui": "string", optional
15  "countyString": "string", required
16  "cityString": "string", required
17  "email": "string", required
18 }

```

clientInternalReference *optional*

string

Optional field; client internal reference (invoice number, order – will be displayed in the cash on delivery ledger)

parcels *required*

array<object>

Package details; Only the package weight is mandatory but providing all the others is recommended

```

1 {
2   "width": 0, dimensions in cm
3   "length": 0, dimensions in cm
4   "height": 0, dimensions in cm
5   "weight": 0, in kg, required

```

```
6 }
```

observation

string

Optional field; awb observations

priceObservation

string

Optional field; price observations

oohFirstMile *required for locker or PUDO services, not needed for courier delivery services*

integer

Optional field used for outOfHome first mile location ($\geq 500k$ pudo, $< 500k$ locker)

oohLastMile *required for locker or PUDO services, not needed for courier delivery services*

integer

Optional field used for outOfHome last mile location ($\geq 500k$ pudo, $< 500k$ locker)

orderNumber *optional*

string

returnLockerParcel *required only for locker return services. This parameter is used to define the date when the return AWB will expire.*

object

```
1 {
2   "eligibilityDate": "2025-10-16T13:14:42.874Z"
3 }
```

clientOohParcel *required only for PUDO return services. This parameter is used to define the date when the return AWB will expire.*

object

```
1 {
2   "eligibilityDate": "2025-10-16T13:14:42.874Z"
3 }
```

clientObservation *optional*

string

awbNumber *optional*

string

API call examples

Create AWB with same country delivery (ex: RO to RO), containing one parcel - home delivery (24H)

```
1 {
2   "packageType": "0", // => 0= standard parcel; 1=small parcel (example: envelope); 2=big parcel (example: freezer)
3   "insuredValue": "699.9900",
4   "cashOnDelivery": "427.9700",
5   "observation": "observation 1",
6   "priceObservation": "observation 2",
7   "clientObservation": "observation 3",
8   "awbPayment": "1", // => the company who generates the AWB shipment
9   "thirdPartyPickup": "0",
10  "pickupPoint": "123", // => represents your warehouse/store id from where the sameday courier will load the parcels
11  You can obtain the ID by calling this endpoint get--api-client-pickup-points
12
13  "service": "7", // => 7 is the ID for the home delivery service (24H Nextday delivery).
14  For other services, call this endpoint get--api-client-services
15
16  "contactPerson": "1", // => the warehouse/store contact person ID.
17  You can obtain the ID by calling this endpoint get--api-client-pickup-points
18  "awbRecipient": {
19    "county": "1", // => for the complete list of provinces/countys use: get--api-geolocation-county
20    "city": "6", // => for the complete list of cities use: get--api-geolocation-city
21    "address": "Test address", // => fill it using the street name and house number
22    "name": "Test name", // => your customer full name
23    "phoneNumber": "0700000000", // => your customer phone number
24    "postalCode": "060011",
25    "personType": "0" // => 0= natural person ; 1= company
26  },
27  "packageWeight": "1",
28  "parcels": [
```

```

29     {
30         "weight": "3.8",
31         "width": "46.6",
32         "length": "73.7",
33         "height": "15.1"
34     }
35 ],
36 "packageNumber": "1", // => number of packages
37 "clientInternalReference": "client_unique_reference", // => must always be unique,
38
39 }
40
41
42

```

Create AWB with same country delivery (ex: RO to RO), containing two parcels - home delivery (24H)

```

1  {
2      "packageType": "0",
3      "insuredValue": "699.9900",
4      "cashOnDelivery": "427.9700",
5      "observation": "observation 1",
6      "priceObservation": "observation 2",
7      "clientObservation": "observation 3",
8      "awbPayment": "1",
9      "thirdPartyPickup": "0",
10     "pickupPoint": "1",
11     "service": "7",
12     "contactPerson": "1",
13     "awbRecipient": {
14         "county": "1",
15         "city": "6",
16         "address": "Test address",
17         "name": "Test name",
18         "phoneNumber": "0700000000",
19         "postalCode": "060011",
20         "personType": "0"
21     },
22     "packageWeight": "7.6",
23     "parcels": [
24         {
25             "weight": "3.8",
26             "width": "46.6",
27             "length": "73.7",
28             "height": "15.1"
29         },
30         {
31             "weight": "3.8",
32             "width": "46.6",
33             "length": "73.7",
34             "height": "15.1"
35         },
36     ],
37 },
38 "packageNumber": "2",
39 "clientInternalReference": "client_unique_reference",
40 }

```

Local return shipping with home pickup (Standard Return)

```

1  {
2      "packageType": "0",
3      "insuredValue": "699.9900",
4      "cashOnDelivery": "427.9700",
5      "observation": "observation 1",
6      "priceObservation": "observation 2",
7      "clientObservation": "observation 3",
8      "awbPayment": "1",
9      "thirdPartyPickup": "1",
10     "thirdParty": {
11         "county": "1",
12         "city": "1",
13         "address": "test pickup address",
14         "personType": "0",
15         "phoneNumber": "0700000000",
16         "name": " test name "
17     },
18     "pickupPoint": "123",
19
20     "service": "10", // => 10 is the ID for the Standard Return service.
21     For other services, please use: get-api-client-services
22
23     "contactPerson": "1", // => get the ID by using: get--api-client-pickup-points

```

```

24 "awbRecipient":{
25   "county":"1", // => for the full county/province list, use: get--api-geolocation-county
26   "city":"6", // => for the full city list, use: get--api-geolocation-city
27   "address":"client warehouse address",
28   "name":"client name",
29   "phoneNumber":"0700000000",
30   "postalCode":"060011",
31   "personType":"0"
32 },
33 "packageWeight":"1",
34 "parcels":[
35   {
36     "weight":"3.8",
37     "width":"46.6",
38     "length":"73.7",
39     "height":"15.1"
40   }
41 ],
42 "packageNumber":"1",
43 "clientInternalReference":"client_unique_reference",
44 }
45
46
47

```

Local parcel exchange shipping (SWAP)

```

1 {
2   "pickupPoint":"1", // => to get your ID, use get--api-client-pickup-points
3   "contactPerson":"1", // => to get your ID, use get--api-client-pickup-points
4   "packageType":"0",
5   "packageNumber":"1",
6   "packageWeight":"1",
7   "service":"7",
8   "awbPayment":"1",
9   "cashOnDelivery":"7.31",
10  "insuredValue":"0",
11  "thirdPartyPickup":"0",
12  "serviceTaxes":[
13    "SWAP" // => SWAP is the code for the exchange parcel
14  ],
15  "awbRecipient":{
16    "county":"1", // => to get your ID, use get--api-geolocation-county
17    "city":"6", // => to get your ID, use get--api-geolocation-city
18    "address":"client warehouse address",
19    "name":"client name",
20    "phoneNumber":"0700000000",
21    "postalCode":"060011",
22    "personType":"0"
23  },
24  "parcels":[
25    {
26      "weight":"1",
27      "width":"1",
28      "length":"1",
29      "height":"1"
30    }
31  ]
32 }

```

Reply:

```

1 {
2   "awbNumber":"1SDY241120277", // => delivery awb number
3   "awbCost":9.55,
4   "parcels":[
5     {
6       "position":1,
7       "awbNumber":"1SDY241120277001" , // => delivery parcel number
8     }
9   ],
10  "pdfLink":"https://api.sameday.ro/api/awb/download/1SDY241120277",
11  "pickupLogisticLocation":"B_M0G0SOAIA_A01",
12  "deliveryLogisticLocation":"B_M0G0SOAIA_A01",
13  "deliveryLogisticCircle":"Cerc 1",
14  "returnAwbs":[
15    {
16      "awbNumber":"1SDYCS1120277", // => return AWB number
17      "awbCost":12.65,
18      "serviceTaxId":11
19    }
20  ],
21  "sortingHub":"B_HUB_H01",

```

```

22 "sortingHubId":4,
23 "deliveryLogisticLocationId":1,
24 "pickupLogisticLocationId":1
25 }

```

Local Easybox delivery request (Locker Nextday)

```

1 {
2   "packageType":"0",
3   "insuredValue":"699.9900",
4   "cashOnDelivery":"427.9700",
5   "observation":"observation 1",
6   "priceObservation":"observation 2",
7   "clientObservation":"observation 3",
8   "awbPayment":"1",
9   "thirdPartyPickup":"0",
10  "pickupPoint":"1",
11  "service":"15", // => 15 is the service for Easybox delivery
12  "contactPerson":"1",
13  "awbRecipient":{
14    "name":"Test name",
15    "phoneNumber":"0700000000",
16    "personType":"0"
17    "email":"recipient.email@email.com"
18  },
19  "packageWeight":"1",
20  "parcels":[
21    {
22      "weight":"3.8",
23      "width":"46.6",
24      "length":"73.7",
25      "height":"15.1"
26    }
27  ],
28  "packageNumber":"1",
29  "clientInternalReference":"client_unique_reference",
30  "oohLastMile":"174", => here you will put the Easybox ID. In order to obtain those IDs, call GET/api/client/ooh-locations
31
32 }
33
34
35

```

Local shipping with personal loading (PDO) in Easybox and delivery to an Easybox (Locker Nextday)

 In the serviceTaxes parameter, add both the PDO code and the ID of this extra option. Use only the ID corresponding to the package type in the request (packageType: 0, 1 or 2).

These IDs are unique for each Sameday customer.

```

1 {
2   "packageType":"0",
3   "insuredValue":"699.9900",
4   "cashOnDelivery":"427.9700",
5   "observation":"observation 1",
6   "priceObservation":"observation 2",
7   "clientObservation":"observation 3",
8   "awbPayment":"1",
9   "thirdPartyPickup":"0",
10  "pickupPoint":"1",
11  "service":"15", // => 15 is the service for Easybox delivery
12
13  "serviceTaxes":"PDO 123456",
14  PDO is the code for Personal Dropoff + the unique ID allocated to the packageType
15  To obtain the IDs, call GET/API/CLIENT/SERVICES endpoint.
16
17  "contactPerson":"1",
18  "awbRecipient":{
19    "name":"Test name",
20    "phoneNumber":"0700000000",
21    "personType":"0"
22    "email":"recipient.email@email.com"
23  },
24  "packageWeight":"1",
25  "parcels":[
26    {
27      "weight":"3.8",
28      "width":"46.6",
29      "length":"73.7",
30      "height":"15.1"
31    }
32  ]
33
34
35

```

```

32 ],
33 "packageNumber":"1",
34 "clientInternalReference":"client_unique_reference",
35
36 "oohLastMile":"174",
37 => ID for the delivery locker
38 }

```

Local return shipping, with delivery in easybox (Return in locker)

⚠ Please note that the lockerFirstMile and lockerLastMile parameters will be deprecated in 2025 (exact date TBA). They are being replaced with oohFirstMile and oohLastMile.

Please implement them in all your integrations!

```

1 {
2   "pickupPoint":"139",
3   "contactPerson":"145",
4   "packageType":"0",
5   "packageNumber":"1",
6   "packageWeight":"1",
7   "service":"24", => 24 is the ID for Easybox return service (Return in locker)
8   "awbPayment":"1",
9   "cashOnDelivery":"0",
10  "insuredValue":"0",
11  "thirdPartyPickup":"1",
12  "thirdParty":{
13    "name":"Client Name",
14    "phoneNumber":"0700000000",
15    "email":"client.email@email.com"
16    "personType":"0",
17  },
18  "awbRecipient":{
19    "name":"Nume",
20    "phoneNumber":"07222",
21    "personType":"1",
22    "companyName":"Your company name.",
23    "address":"Splaiul Independentei",
24    "county":"11",
25    "city":"23",
26  },
27  "parcels":[
28    "1",
29    {
30      "weight":"1"
31    }
32  ],
33  "oohFirstMile":"264", => The locker ID where the package will be returned.
34
35
36  "returnLockerParcel":{
37    "eligibilityDate":"2023-01-15 23:59:59"
38  }
39 }

```

International shipping with home delivery (Crossborder HD 24H)

```

1 {
2   "packageType":"0",
3   "insuredValue":"0",
4   "cashOnDelivery":"427.9700",
5   "currency":"HUF"
6   "observation":"observation 1",
7   "priceObservation":"observation 2",
8   "clientObservation":"observation 3",
9   "awbPayment":"1",
10  "thirdPartyPickup":"0",
11  "pickupPoint":"1",
12  "service":"28", // => 28 is the ID for Crossborder HD 24H service.
13  "contactPerson":"1",
14  "awbRecipient":{
15    "county":"62", // => county ID from the destination country
16    "city":"16146", // => city ID from the destination country
17    "address":"Test address",
18    "name":"Test name",
19    "phoneNumber":"0700000000",
20    "postalCode":"1100",
21    "personType":"0"
22  },
23  "packageWeight":"1",
24  "parcels":[
25    {

```

```

26     "weight": "3.8",
27     "width": "46.6",
28     "length": "73.7",
29     "height": "15.1"
30   }
31 ],
32   "packageNumber": "1",
33   "clientInternalReference": "client_unique_reference",
34 }
35
36
37

```

International return shipping with home pickup (Crossborder Standard Return)

```

1  {
2    "packageType": "0",
3    "insuredValue": "699.9900",
4    "observation": "observation 1",
5    "priceObservation": "observation 2",
6    "clientObservation": "observation 3",
7    "awbPayment": "1",
8    "thirdPartyPickup": "1",
9    "thirdParty": {
10     "county": "62",
11     "city": "16146",
12     "address": "test pickup address",
13     "postalCode": "1100",
14     "personType": "0",
15     "phoneNumber": "0700000000",
16     "name": " test name "
17   },
18   "pickupPoint": "1",
19
20   "service": "29", // => 29 is the ID for Crossborder Standard Return service
21
22
23   "contactPerson": "1",
24   "awbRecipient": {
25     "county": "1",
26     "city": "6",
27     "address": "client warehouse address",
28     "name": "client name",
29     "phoneNumber": "0700000000",
30     "postalCode": "060011",
31     "personType": "0"
32   },
33   "packageWeight": "1",
34   "parcels": [
35     {
36       "weight": "3.8",
37       "width": "46.6",
38       "length": "73.7",
39       "height": "15.1"
40     }
41   ],
42   "packageNumber": "1",
43   "clientInternalReference": "client_unique_reference",
44 }
45
46
47

```

International shipping with easybox delivery (Crossborder Locker delivery)

```

1  {
2    "packageType": "0",
3    "insuredValue": "0",
4    "cashOnDelivery": "427.9700",
5    "currency": "HUF"
6    "observation": "observation 1",
7    "priceObservation": "observation 2",
8    "clientObservation": "observation 3",
9    "awbPayment": "1",
10   "thirdPartyPickup": "0",
11   "pickupPoint": "1",
12   "service": "30", // => 30 is the ID for Crossborder Locker delivery
13   "contactPerson": "1",
14   "awbRecipient": {
15     "name": "Test name",
16     "phoneNumber": "0700000000",
17     "personType": "0"
18     "email": "recipient.email@email.com"

```

```

19 },
20 "packageWeight":"1",
21 "parcels":[
22   {
23     "weight":"3.8",
24     "width":"46.6",
25     "length":"73.7",
26     "height":"15.1"
27   }
28 ],
29 "packageNumber":"1",
30 "clientInternalReference":"client_unique_reference",
31
32 "oohLastMile":"10001",
33 }
34
35
36

```

International return shipping, with delivery in easybox (Crossborder Locker return)

```

1 {
2   "pickupPoint":"1",
3   "contactPerson":"1",
4   "packageType":"0",
5   "packageNumber":"1",
6   "packageWeight":"1",
7   "service":"31", => 31 is the ID for Crossborder Locker return
8   "awbPayment":"1",
9   "cashOnDelivery":"0",
10  "insuredValue":"0",
11  "thirdPartyPickup":"1",
12  "thirdParty":{
13    "name":"Client Name",
14    "phoneNumber":"0700000000",
15    "email":"client.email@email.com"
16    "personType":"0",
17  },
18  "awbRecipient":{
19    "name":"Nume",
20    "phoneNumber":"07222",
21    "personType":"1",
22    "companyName":"Numele companiei dvs.",
23    "address":"Splaiul Independentei",
24    "county":"11",
25    "city":"23",
26  },
27  "parcels":[
28    "1",
29    {
30      "weight":"1"
31    }
32  ],
33  "oohFirstMile":"10001",
34
35  "returnLockerParcel":{
36    "eligibilityDate":"2023-01-15 23:59:59"
37  }
38 }
39
40
41

```

National shipping, fixed point shipping (PUDO Nextday)

```

1 {
2   "pickupPoint":"1",
3   "contactPerson":"1",
4   "packageType":"1",
5   "packageNumber":"1",
6   "packageWeight":"1",
7   "service":"57", => 57 is the ID for PUDO Nextday
8   "awbPayment":"1",
9   "cashOnDelivery":"0",
10  "insuredValue":"0",
11  "thirdPartyPickup":"0",
12  "awbRecipient":{
13    "name":"Client Name",
14    "phoneNumber":"0700000000",
15    "email":"client.email@email.com"
16    "personType":"0",
17  },
18

```

```

19  "parcels":[
20    "1",
21    {
22      "weight":"1",
23      "width":"1",
24      "length":"1",
25      "height":"1"
26    }
27  ],
28
29  "oohLastMile":"500100",
30
31 }
32
33
34

```

National shipping, load in locker, deliver to locker (Locker2Locker)

```

1  "packageType":"1", > 0= standard parcel; 1=small parcel (example: envelope);
2  2=big parcel (example: freezer)
3  "packageNumber":"1",
4  "awbPayment":"1",
5  "cashOnDelivery":"0",
6  "cashOnDeliveryReturns":"1",
7  "insuredValue":"0",
8  "thirdPartyPickup":"1", - must be 1 at all time. In the thirdParty parameters you will put the shippers details (the person that
loads the parcel in the lockerFirstMile)
9  "thirdParty":{
10    "county":62, - replace this id with the real county id of the shipper/seller
11    "city":16146, - replace this id with the real city id of the shipper/seller
12    "address":"test pickup address",
13    - replace this with the real address of the shipper/seller
14    "postalCode":"1100",- replace it with the real shipper/seller postal code
15    "personType":0, - 0 for natural person, 1 - company
16    "phoneNumber":"0700000000", - shipper/seller phone number
17    "name":" test name " - shipper/seller name
18  },
19
20  "awbRecipient":{
21    "county":50, - replace this id with the real county id of the recipient/buyer
22    "city":1500, - replace this id with the real city id of the recipient/buyer
23    "address":"test delivery address",
24    - replace this with the real address of the recipient/buyer
25    "postalCode":"1100",- replace it with the real recipient/buyer postal code
26    "personType":0, - 0 for natural person, 1 - company
27    "phoneNumber":"0700000000", - recipient/buyer phone number
28    "name":" test name " - recipient/buyer name
29  },
30  "packageWeight":2, - replace with real weight
31  "clientInternalReference":"your unique reference",
32
33  Parcel dimensions are mandatory for this service, you can put at least 1 cm
34  "parcels":[
35    {
36      "weight":2,
37      "width":1,
38      "length":1,
39      "height":1
40    }
41  ],
42
43  "service":"51", - Locker2Locker service
44  "pickupPoint":"1", - change this with your real pickupPoint id.
45
46  "oohFirstMile":"23135", for lockerFirstMile you can put this locker ID for all requests made on the R0 live environment. This ID
represents a fictive locker location.
47
48  "oohLastMile":"6554",for lockerLastMile you need to put the real locker ID,so we know in which locker we deliver.

```