

Quantum Structures as Generative Scores: Partition Logic, Prolog, and Aesthetic Form

Christian Jendreiko and Karl Svozil

(Dated: March 17, 2026)

We connect partition logic with Generative Logic by translating finite partition logics into Prolog-based Simple Generative Logic Grammars. As a proof of concept, we use the five-atom V-logic L_{12} to generate a modular visual artifact, the *Quantum Square*. The approach separates logical structure from its visual, textual, or sonic realization and can also incorporate different probabilistic overlays. This makes partition logic useful both as a generative design resource and as a tool for communicating complementarity.

I. INTRODUCTION

This paper connects two lines of work that are rarely discussed together. One originates in the logical and combinatorial study of finite empirical structures in quantum foundations, especially partition logics and related event structures [1–5]. The other originates in artistic research and design pedagogy, namely Christian Jendreiko’s concept of *Generative Logic* and the associated *Simple Generative Logic Grammar* (SGLG), which treats Prolog as a generative engine for aesthetic production [6, 7].

The shared premise is that formal structures are not only objects of abstract analysis; they can also act as structuring agents. In mathematics, this idea is familiar from fractals, cellular automata, L-systems, symmetry groups, and stochastic processes. In design, one encounters related practices whenever a rule system is used to generate, constrain, or organize visual, textual, or sonic material. The present paper asks whether partition logics can be used in this way: not merely as representations of finite event structures, but as engines for the generation of perceptible artifacts.

This question has both an aesthetic and a communicative side. Finite logical structures exhibit repetition, asymmetry, recurrence, and nontrivial forms of overlap. These can become aesthetically productive once mapped into color, shape, spacing, rhythm, or timbre. At the same time, concepts such as context, complementarity, and non-Boolean composition are often difficult to grasp when they remain purely symbolic. If they can be externalized into visual or sonic form without losing their structural discipline, they may become more accessible.

The key methodological move of the paper is the separation of three layers:

1. a *formal skeleton*, given by a partition logic or related finite event structure;
2. a *generative grammar*, which translates that skeleton into a structured template of positions;
3. a *sign repertoire and rendering rule*, which realizes that structure in a concrete medium.

This separation is important both artistically and scientifically. Artistically, it allows the same structure to migrate across media. Scientifically, it prevents us from conflating a combinatorial structure with a particular physical realization or probability theory.

The paper does four things. First, it gives a compact account of the partition-logical source structures used here. Second, it states a general translation from finite partition logics with separating sets of two-valued states into SGLGs. Third, it develops a proof of concept: the V-logic L_{12} is translated into a visual artifact, the *Quantum Square*. Fourth, it extends the method to a triangle logic and discusses the resulting structures from the perspectives of design and science communication.

II. PARTITION LOGIC BETWEEN FORMAL STRUCTURE AND DESIGN MATERIAL

A. Partitions and partition logics

Let $\Omega_n = \{1, 2, \dots, n\}$ be a finite set. A *partition* π of Ω_n is a family of nonempty, pairwise disjoint subsets whose union is Ω_n . The elements of a partition are its *blocks*. Each partition can be identified with the atoms of a finite Boolean algebra. A *partition logic* is obtained by selecting several such Boolean algebras and pasting them together through identified common elements [2, 3, 5].

In the language of quantum logic, the pasted Boolean algebras are often called *contexts*. They are local classical views inside a larger non-Boolean structure. Whenever more than one context is present, one obtains a form of complementarity: different decompositions of the same underlying set co-exist, but they cannot be reduced to a single global Boolean block unless the structure is trivial.

Partition logics are therefore well suited to interdisciplinary transfer. They are finite, explicit, and combinatorial. At the same time, they already carry key motifs associated with quantum theory: contextual decomposition, overlap of contexts, and non-Boolean composition.

B. Formal Example A: a horizontal sum of binary partitions

A minimal example uses the set

$$\Omega_3 = \{1, 2, 3\}. \quad (1)$$

Consider the three binary partitions

$$\begin{aligned} \pi_1 &= \{\{1\}, \{2, 3\}\}, \\ \pi_2 &= \{\{2\}, \{1, 3\}\}, \\ \pi_3 &= \{\{3\}, \{1, 2\}\}. \end{aligned} \quad (2)$$

If these three Boolean algebras are pasted only in their bottom and top elements, one obtains a horizontal sum of three four-element Boolean algebras. This is a simple non-Boolean event structure.

To make the example more readable, let us name the six atoms

$$\begin{aligned} p &\leftrightarrow \{1\}, & \neg p &\leftrightarrow \{2,3\}, \\ q &\leftrightarrow \{2\}, & \neg q &\leftrightarrow \{1,3\}, \\ r &\leftrightarrow \{3\}, & \neg r &\leftrightarrow \{1,2\}. \end{aligned} \quad (3)$$

The underlying points 1,2,3 induce three two-valued states s_1, s_2, s_3 . The supports are then

$$\begin{aligned} T(p) &= \{s_1\}, & T(\neg p) &= \{s_2, s_3\}, \\ T(q) &= \{s_2\}, & T(\neg q) &= \{s_1, s_3\}, \\ T(r) &= \{s_3\}, & T(\neg r) &= \{s_1, s_2\}. \end{aligned} \quad (4)$$

Even this small logic shows a pattern that later becomes generative: the same finite set of state symbols is redistributed from context to context.

C. Formal Example B: the V-logic L_{12}

Our main proof of concept uses the five-atom V-logic L_{12} , consisting of two three-atomic contexts

$$C_1 = \{a, b, c\}, \quad C_2 = \{c, d, e\}, \quad (5)$$

with intertwining atom c . Figure 1(a) shows the corresponding 3-uniform hypergraph in Greechie-style notation [8], in which contexts are represented schematically by unbroken lines that intersect at shared atoms.

This logic has exactly five two-valued states, shown in Table I. They separate the atoms and therefore provide a classical state space for a partition-logical representation [9, Theorem 0].

The supports of the atoms are

$$\begin{aligned} T(a) &= \{s_1, s_2\}, & T(b) &= \{s_3, s_4\}, & T(c) &= \{s_5\}, \\ T(d) &= \{s_2, s_4\}, & T(e) &= \{s_1, s_3\}. \end{aligned} \quad (6)$$

Equivalently, by identifying each atom with the set of two-valued states in which it is assigned the value 1 [5], the two contexts are represented by the partitions

$$\begin{aligned} &\{\{s_1, s_2\}, \{s_3, s_4\}, \{s_5\}\}, \{\{s_5\}, \{s_2, s_4\}, \{s_1, s_3\}\}; \\ \text{or, equivalently,} & \\ &\{\{1, 2\}, \{3, 4\}, \{5\}\}, \{\{5\}, \{2, 4\}, \{1, 3\}\}. \end{aligned} \quad (7)$$

TABLE I. The five two-valued states of the V-logic L_{12} .

state	a	b	c	d	e
s_1	1	0	0	0	1
s_2	1	0	0	1	0
s_3	0	1	0	0	1
s_4	0	1	0	1	0
s_5	0	0	1	0	0

The conceptual importance of this example, as well as the previous example involving horizontal sums, is that it exhibits complementarity while still possessing a separating set of two-valued states. Thus it does *not* yet realize full Kochen-Specker-type value indefiniteness [9]. For science communication this is advantageous: it allows one to explain context dependence without prematurely introducing stronger no-go results.

D. A quantum realization of the same logical form

The same V-logic also admits a faithful orthogonal representation [10, 11] in three-dimensional Hilbert space. A simple choice is

$$\begin{aligned} |a\rangle &= (1, 0, 0)^T, & |b\rangle &= (0, 1, 0)^T, \\ |c\rangle &= (0, 0, 1)^T, \\ |d\rangle &= (\cos \theta, \sin \theta, 0)^T, & |e\rangle &= (-\sin \theta, \cos \theta, 0)^T, \end{aligned} \quad (8)$$

with $0 < \theta < \pi/2$. Then $\{|a\rangle, |b\rangle, |c\rangle\}$ and $\{|c\rangle, |d\rangle, |e\rangle\}$ form two orthonormal bases sharing the ray c .

This dual representability is central to our later discussion. The same finite logical skeleton can be realized as a partition logic with classical probabilities or as an orthogonal vector configuration with Born-type probabilities. Generatively, this means that one may keep the formal skeleton fixed while changing the weighting regime.

III. GENERATIVE LOGIC AND THE SGLG

A. Generative Logic

Generative Logic, introduced in Refs. [6, 7], treats Prolog not only as a language for symbolic computation but as a generative environment in which rules, substitutions, and derivations become design operations. The Prolog inference engine functions as a disciplined producer of variants. In this perspective, the logical formula is not only a specification of truth conditions; it is also a compositional device.

This is particularly relevant in education and artistic research. It allows students and researchers to work with rule systems that remain both transparent and executable. The output need not remain verbal or symbolic. Once a derivation is mapped into color, sound, or spatial arrangement, a logical process becomes a perceptible artifact.

B. A Simple Generative Logic Grammar

To turn a partition logic into an executable generative scheme, we use a Simple Generative Logic Grammar (SGLG) [7]. In the present paper, this grammar is understood in a practical way: it specifies how a finite artifact is assembled from rows and symbols, while a separate rendering map determines how those symbols appear in a given medium.

We write the grammar as

$$G = (V, \Sigma, P, S, M, L), \quad (9)$$

where V is a set of nonterminal symbols, Σ is a set of symbols to be rendered, P is a set of production rules, S is the start symbol, M is a rendering map assigning concrete realizations to symbols, and L is a set of layout symbols such as separators or line breaks.

For the present purposes, a production rule of the form

$$\text{Head} \rightarrow \text{Body} \quad (10)$$

may be read simply as an assembly rule: the head is expanded into the ordered sequence given by the body. For example, if the complete artifact consists of five rows, one may write

$$q \rightarrow abcde, \quad (11)$$

meaning that the whole object is built from the rows a, b, c, d, e . A row may then be specified by a rule such as

$$a \rightarrow s_1 s_2 br s_3 s_4 s_5 n, \quad (12)$$

where $s_1, \dots, s_5$ are state symbols, br is a separator, and n denotes a line break.

The grammar therefore determines the structure of the output, but not yet its concrete appearance. The rendering map M assigns a medium-specific realization to each symbol. For instance, one may choose

$$s_1 \mapsto \text{green square}, \quad s_2 \mapsto \text{blue square}, \quad (13)$$

and similarly for the other symbols. By changing M , the same grammar can be realized visually, textually, or sonically.

In Jendreiko's broader framework, such rules may also be interpreted as containment relations, in the sense that larger forms are composed of smaller ones [12, 13]. For the present paper, however, it is sufficient to read them as finite assembly rules.

The non-recursive character of the grammar is important here. It guarantees that every derivation terminates after finitely many steps and yields a finite, inspectable artifact.

IV. FROM PARTITION LOGIC TO GRAMMAR

The preceding grammar scheme becomes concrete once its symbols are taken from a partition logic. The basic idea is simple: atoms of the logic become row labels, two-valued states become recurring symbols, and a separator divides the states that make a given atom true from those that make it false.

Let L be a finite partition logic with atoms

$$A = \{x_1, \dots, x_m\} \quad (14)$$

and a separating set of two-valued states

$$V_L = \{v_1, \dots, v_N\}. \quad (15)$$

Associate a symbol s_i with each two-valued state v_i , and write

$$\mathcal{S}_N = \{s_1, \dots, s_N\}. \quad (16)$$

For each atom x_j , define

$$T(x_j) = \{s_i \in \mathcal{S}_N \mid v_i(x_j) = 1\}, \quad F(x_j) = \mathcal{S}_N \setminus T(x_j). \quad (17)$$

Thus $T(x_j)$ is the set of state symbols for which x_j is true, and $F(x_j)$ is the complementary set for which x_j is false.

We then construct a grammar G_L with start symbol q by setting

$$q \rightarrow x_1 x_2 \dots x_m, \quad (18)$$

$$x_j \rightarrow T(x_j) br F(x_j) n. \quad (19)$$

Here br is a separator symbol and n is a layout symbol such as a line break. In words: the whole artifact consists of one row for each atom, and the row of x_j lists first those states in which x_j is true and then those in which it is false.

Proposition 1. *Let L be a finite partition logic with separating two-valued states. The grammar G_L constructed from Eqs. (17)–(19) preserves the incidence relation between atoms and two-valued states. In the generated row for x_j , the symbol s_i occurs to the left of the separator iff $v_i(x_j) = 1$, and to the right iff $v_i(x_j) = 0$.*

Proof. By definition, $T(x_j)$ contains exactly those s_i for which $v_i(x_j) = 1$, and $F(x_j)$ contains exactly those s_i for which $v_i(x_j) = 0$. The rule for x_j concatenates $T(x_j)$, then the separator, then $F(x_j)$. Hence the position of s_i relative to the separator is equivalent to the truth value $v_i(x_j)$. Since the start rule concatenates all rows, the complete derivation preserves the full atom-state incidence relation. $\square$

This translation captures one specific structural feature of the logic: the pattern of support of its atoms across the two-valued states. It does not yet determine the medium in which the result will appear. That choice enters only through the rendering map M , which may assign colors, letters, geometric primitives, or sound events to the state symbols.

The construction is easiest to understand through examples.

A. Formal Example C: the horizontal sum as a grammar

Applying the translation to the horizontal-sum example of Eq. (2) yields

$$\begin{aligned} p &\rightarrow s_1 br s_2 s_3 n, & \neg p &\rightarrow s_2 s_3 br s_1 n, \\ q &\rightarrow s_2 br s_1 s_3 n, & \neg q &\rightarrow s_1 s_3 br s_2 n, \\ r &\rightarrow s_3 br s_1 s_2 n, & \neg r &\rightarrow s_1 s_2 br s_3 n. \end{aligned} \quad (20)$$

Each row corresponds to one atom, and the recurring symbols s_1, s_2, s_3 record which of the three two-valued states support that atom. Even in this small example, the grammar already produces a visible pattern of repetition and redistribution.

B. Formal Example D: the V-logic as a grammar

The V-logic L_{12} is handled in exactly the same way. Since it has five atoms and five two-valued states, the resulting artifact has five rows built from the recurring symbols $s_1, \dots, s_5$. Using the supports listed in Eq. (6), we obtain

$$\begin{aligned} a &\rightarrow s_1 s_2 br s_3 s_4 s_5 n, \\ b &\rightarrow s_3 s_4 br s_1 s_2 s_5 n, \\ c &\rightarrow s_5 br s_1 s_2 s_3 s_4 n, \\ d &\rightarrow s_2 s_4 br s_1 s_3 s_5 n, \\ e &\rightarrow s_1 s_3 br s_2 s_4 s_5 n. \end{aligned} \quad (21)$$

This is the structural core of the *Quantum Square*. The grammar fixes the arrangement of symbols row by row; the subsequent rendering map turns those symbols into colored squares, letters, or sound events.

The important point is that the logical structure and the perceptible realization remain distinct. The V-logic determines the combinatorial arrangement, whereas the choice of color, typography, or sound belongs to the rendering stage. This separation is what allows the same partition-logical source to function both as a formal object and as a generative score.

V. THE QUANTUM SQUARE: HYPERGRAPH, SCHEMA, AND TILE IMAGE

A. A color repertoire

To obtain a visual realization, we map the five state symbols to five colors:

$$\begin{aligned} s_1 &\mapsto \text{green}, & s_2 &\mapsto \text{blue}, & s_3 &\mapsto \text{red}, \\ s_4 &\mapsto \text{orange}, & s_5 &\mapsto \text{violet}. \end{aligned} \quad (22)$$

The separator br is rendered as a black square. In the row-wise version below, blank white cells are used only for alignment; they are not part of the logic.

Figure 1 presents three views of the same source structure: panel (a) shows the underlying V-logic as a Greechie-style hypergraph, panel (b) shows the corresponding atom-state incidence schema, and panel (c) shows the grammar-oriented tile realization that we call the *Quantum Square*.

Panel (a) shows the logical source in graphical form, panel (b) translates the same source into a compact incidence schema, and panel (c) realizes the same combinatorial information as an aesthetic object. Together, the three views make clear that the generated image is not arbitrary: it is a structured rendering of a well-defined finite logic.

B. Why this object is aesthetically interesting

The *Quantum Square* is not a picture of a quantum system in any naive representational sense. It does not depict particles, trajectories, or apparatuses. Rather, it externalizes a

formal relation as a visible organization of repetition and difference.

What becomes aesthetically salient is the disciplined reappearance of the same five colors across distinct rows, each row embodying a different logical perspective on the same finite state space. In design terms, this produces a tension between consistency and redistribution. In humanities terms, one may say that the logic functions as a score: it does not determine one unique expressive surface, but it constrains a field of possible realizations. In logical terms, it preserves the incidence of atoms and states.

VI. A TRIANGLE-LOGIC GENERALIZATION OF THE QUANTUM SQUARE

To show that the method is not specific to the V-logic, we now apply the same procedure to a triangle logic represented by the three partitions

$$\Pi_{\Delta} = \left\{ \{ \{1\}, \{2,3\}, \{4\} \}, \{ \{4\}, \{1,2\}, \{3\} \}, \{ \{3\}, \{2,4\}, \{1\} \} \right\}. \quad (23)$$

This structure is again a partition logic, but now with three contexts arranged cyclically rather than two contexts joined in a V-shape.

To make the logic easier to read, let us name its six atoms by

$$\begin{aligned} a &\leftrightarrow \{1\}, & b &\leftrightarrow \{2,3\}, & c &\leftrightarrow \{4\}, \\ d &\leftrightarrow \{1,2\}, & e &\leftrightarrow \{3\}, & f &\leftrightarrow \{2,4\}. \end{aligned} \quad (24)$$

The three contexts are then

$$C_1 = \{a, b, c\}, \quad C_2 = \{c, d, e\}, \quad C_3 = \{e, f, a\}. \quad (25)$$

Thus a , c , and e are the intertwining atoms: each belongs to two contexts, while b , d , and f belong to only one.

Writing the four underlying points of the partition logic as two-valued states s_1, s_2, s_3, s_4 , the supports of the atoms are read off directly from Eq. (24):

$$\begin{aligned} T(a) &= \{s_1\}, & T(b) &= \{s_2, s_3\}, & T(c) &= \{s_4\}, \\ T(d) &= \{s_1, s_2\}, & T(e) &= \{s_3\}, & T(f) &= \{s_2, s_4\}. \end{aligned} \quad (26)$$

Applying the translation scheme of Sec. IV yields the start rule

$$q_{\Delta} \rightarrow abcdef \quad (27)$$

and the row rules

$$\begin{aligned} a &\rightarrow s_1 br s_2 s_3 s_4 n, \\ b &\rightarrow s_2 s_3 br s_1 s_4 n, \\ c &\rightarrow s_4 br s_1 s_2 s_3 n, \\ d &\rightarrow s_1 s_2 br s_3 s_4 n, \\ e &\rightarrow s_3 br s_1 s_2 s_4 n, \\ f &\rightarrow s_2 s_4 br s_1 s_3 n. \end{aligned} \quad (28)$$

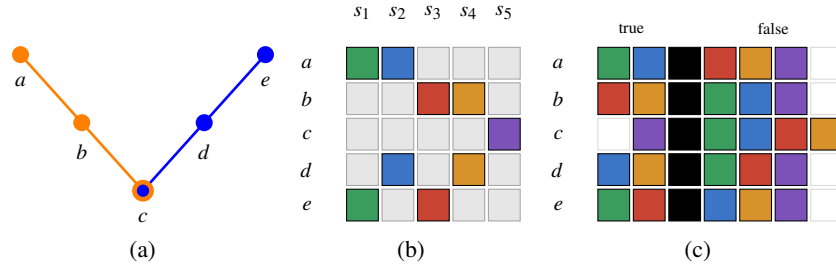


FIG. 1. Three representations of the V-logic L_{12} . (a) Greechie-style hypergraph. (b) Atom-state incidence schema, with colored cells indicating $v_i(x) = 1$ and gray cells indicating $v_i(x) = 0$. (c) The grammar-oriented tile realization, the *Quantum Square*. In each row, squares left of the black separator correspond to states in which the atom is true; squares right of the separator correspond to states in which it is false. Blank cells are layout padding only.

Figure 2 presents the triangle logic in the same three-part scheme used for the V-logic: panel (a) shows the Greechie-style hypergraph, panel (b) gives the corresponding atom-state incidence schema, and panel (c) shows the grammar-oriented tile rendering. The resulting object may be regarded as a triangle-logic generalization of the *Quantum Square*. It preserves the same basic design idea—rows indexed by atoms, recurring state symbols, and a separator between support and complement—while extending it from two contexts to a cyclic arrangement of three.

Compared to the V-logic, this example has fewer two-valued states but more contexts. As a result, the generated tableau uses a smaller color repertoire while exhibiting a more strongly cyclic distribution of that repertoire across rows. This makes the example useful both conceptually and aesthetically: conceptually, because it shows that the method extends beyond the V-shape to other finite logics; aesthetically, because the repeated re-entry of the same four symbols across six rows produces a denser pattern of recurrence and variation.

The triangle logic also illustrates a broader point. The generative method does not depend on one specific source structure, but only on the availability of a finite logical skeleton together with its supporting two-valued states. Once these are given, the same procedure of row construction and medium-specific rendering can be repeated. In this sense, the *Quantum Square* is only the first member of a larger family of logic-generated artifacts.

VII. PROLOG REALIZATIONS

For the sake of conceptual clarity, it is useful to separate in code the *structural layer* from the *repertoire layer*. The structural layer stores the grammar skeleton; the repertoire layer maps symbolic tokens to a medium-specific output.

A. V-logic code

Listing 1. Structural layer: the V-logic stored as a sequence of symbolic rows.

```
% order of rows in the final artifact
rows([a,b,c,d,e]).
```

```
% structural layer: symbolic rows
row(a, [s1,s2,sep,s3,s4,s5]).
row(b, [s3,s4,sep,s1,s2,s5]).
row(c, [s5,sep,s1,s2,s3,s4]).
row(d, [s2,s4,sep,s1,s3,s5]).
row(e, [s1,s3,sep,s2,s4,s5]).
```

The next layer gives a simple repertoire mapping and renderer. The point is not to optimize code, but to make the conceptual separation explicit: the logic defines the structure, while the repertoire determines its perceptible realization.

Listing 2. Repertoire layer and simple renderer. The same structural rows can be rendered with different palettes or in different media.

```
% palette: a symbolic visual repertoire
glyph(s1, '[G] ').
glyph(s2, '[B] ').
glyph(s3, '[R] ').
glyph(s4, '[O] ').
glyph(s5, '[V] ').
glyph(sep, '[#] ').

render_symbol(Sym) :-
    glyph(Sym, G),
    format('~w', [G]).

render_row(Name) :-
    row(Name, Symbols),
    forall(member(S, Symbols), render_symbol(S)),
    nl.

output :-
    rows(Rows),
    forall(member(R, Rows), render_row(R)).
```

This is deliberately modest. In practical applications, the predicate `glyph/2` can be replaced by HTML fragments, SVG instructions, MIDI events, OSC messages, or calls to a graphics or sound engine. Thus the same logical skeleton can generate not only tile images but also textual works or sonic pieces.

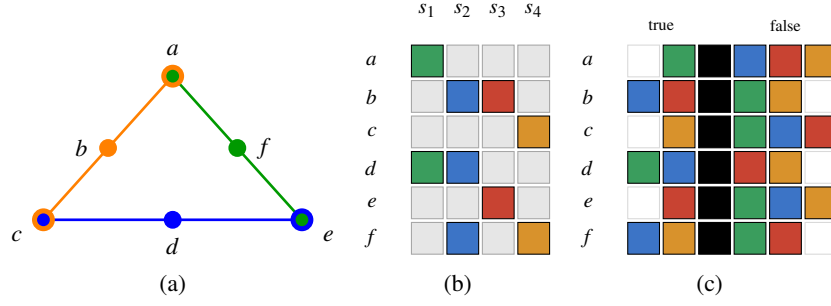


FIG. 2. Triangle-logic generalization of the *Quantum Square*. (a) Greechie-style depiction of the triangle logic associated with Eq. (23). The intertwining atoms a , c , and e are shown by concentric circles because each belongs to two contexts. (b) Atom-state incidence schema. (c) Tile rendering obtained from the grammar in Eq. (28), using four recurring state colors and a black separator between support and complement.

B. Triangle-logic code

The same strategy applies to the triangle logic. The only structural change is the replacement of the five V-logic rows by six rows associated with the six atoms $a, \dots, f$, together with a repertoire that uses only four state symbols.

Listing 3. Structural layer: the triangle logic stored as symbolic rows. The same rendering predicates can be reused with a four-state palette.

```
% order of rows in the final artifact
triangle_rows([a,b,c,d,e,f]).

% structural layer: symbolic rows
triangle_row(a, [s1,sep,s2,s3,s4]).
triangle_row(b, [s2,s3,sep,s1,s4]).
triangle_row(c, [s4,sep,s1,s2,s3]).
triangle_row(d, [s1,s2,sep,s3,s4]).
triangle_row(e, [s3,sep,s1,s2,s4]).
triangle_row(f, [s2,s4,sep,s1,s3]).

triangle_output :-
    triangle_rows(Rows),
    forall(member(R, Rows), (
        triangle_row(R, Symbols),
        forall(member(S, Symbols), render_symbol(S)),
        nl
    )).

```

VIII. PROBABILITY AS A SECOND GENERATIVE LAYER

A. Classical and quantum overlays

A central lesson of the partition-logic literature is that the same logical or graph-theoretic structure does not determine a unique probability theory [11]. If a partition logic has separating two-valued states, one may form classical probabilities as convex combinations

$$p_{cl}(x) = \sum_{i=1}^N \lambda_i v_i(x), \quad \lambda_i \geq 0, \quad \sum_i \lambda_i = 1. \quad (29)$$

TABLE II. Two different probabilistic overlays on the same V-logic skeleton.

	a	b	c	d	e
uniform classical	$2/5$	$2/5$	$1/5$	$2/5$	$2/5$
quantum, $ \psi\rangle = a\rangle$	1	0	0	$1/2$	$1/2$

If, in addition, a faithful orthogonal representation exists, one may assign Born-type probabilities

$$p_q(x) = |\langle \psi | x \rangle|^2. \quad (30)$$

Generatively, these probabilities can be used as a second layer placed on top of the logical skeleton. For example,

$$\begin{aligned} \text{brightness}(x) &= f(p(x)), \\ \text{opacity}(x) &= g(p(x)), \\ \text{duration}(x) &= h(p(x)), \end{aligned} \quad (31)$$

or similarly size, repetition rate, timbral richness, spatial spread, or animation speed.

B. Formal Example E: two weightings of the V-logic

Consider first the uniform classical mixture $\lambda_i = 1/5$. Then Eq. (29) yields

$$p_{cl}(a) = p_{cl}(b) = p_{cl}(d) = p_{cl}(e) = \frac{2}{5}, \quad p_{cl}(c) = \frac{1}{5}. \quad (32)$$

So a weighted visual variant might render c with lower area, lower opacity, or shorter duration than the other atoms.

Now take the Hilbert-space realization of Eq. (8), choose $|\psi\rangle = |a\rangle$, and set $\theta = \pi/4$. Then

$$p_q(a) = 1, \quad p_q(b) = 0, \quad p_q(c) = 0, \quad p_q(d) = \frac{1}{2}, \quad p_q(e) = \frac{1}{2}. \quad (33)$$

Table II compares the two overlays.

This distinction is crucial for science communication. If an artifact is presented as expressing a physical weighting, then one must specify which weighting it instantiates. Otherwise one risks turning a structural visualization into an ambiguous or misleading representation of physical content.

IX. HUMANITIES- AND DESIGN-ORIENTED INTERPRETATION

A. Structure as score

From a design perspective, the partition logic can be interpreted as a score. It is not yet the finished artifact, just as a musical score is not yet a performance. But it prescribes a disciplined arrangement of possibilities. The grammar derived from the logic functions as a notation of relations, recurrences, and separations.

This score-like character is important because it avoids two extremes. On the one hand, it is more rigid than unconstrained improvisation: the formal structure cannot simply be ignored. On the other hand, it is less rigid than a single finished image: many realizations remain possible. The logic therefore occupies a productive middle ground between rule and freedom.

B. Structural template and sign repertoire

A decisive methodological advantage of the SGLG approach is the separation between structural template and sign repertoire. The structural template specifies where something may occur and in what relation to other elements. The sign repertoire specifies what kind of thing will occur there.

This distinction is pedagogically valuable. Students can hold the structure constant while changing the repertoire, thereby seeing what belongs to syntax and what belongs to materialization. Conversely, they can hold the repertoire constant while changing the logical source, thereby seeing how formal structure affects the character of the resulting artifact.

The same V-logic may therefore become:

- a colored tile image,
- a typographic grid,
- a sequence of syllables,
- a rhythmic or harmonic pattern,
- or a data-driven animation.

This is what we mean by a transmedial potential.

C. From diagram to perceptual offering

In science communication, it is often tempting to regard visualization as a transparent window onto a concept. Our approach suggests a more careful view. The generated object is not a transparent copy of the logic. It is a *perceptual offering*: a structured artifact that affords certain acts of recognition, comparison, and reflection.

The value of such artifacts lies partly in their legibility and partly in their sensuous force. A purely formal matrix may be clearer analytically; a more aesthetic tile arrangement may be more memorable or engaging. These are not mutually exclusive aims, but they are distinct. The tension between them should be treated as a design problem rather than suppressed.

D. Complementarity without overstatement

Because the V-logic has separating two-valued states, it is an example of complementarity without full Kochen-Specker contextuality. This is a feature, not a weakness. It allows communicative work to proceed in stages. One can first make the notion of multiple contexts and their overlap intelligible. Only later need one move to stronger configurations without classical truth assignments.

In other words, the present method does not merely generate aesthetic artifacts; it can also scaffold conceptual learning. The generated object is a bridge between abstract structure and human apprehension.

X. DISCUSSION

Several points deserve emphasis.

First, the construction is not limited to the V-logic. Any finite partition logic with separating two-valued states can be translated into an SGLG in the manner described above. Larger examples, including pentagon logics and more intricate pasted structures, should yield richer aesthetic and pedagogical possibilities [5, 14].

Second, not every interesting finite quantum structure is a partition logic. Some configurations important in quantum foundations have no separating set of two-valued states. For those, a different but related translation strategy would be needed, perhaps based directly on faithful orthogonal representations rather than state supports.

Third, the distinction between logical skeleton and probabilistic overlay is not just philosophically neat; it is generatively useful. It allows one to keep the same formal artifact while varying how strongly individual elements are emphasized. This makes it possible to compare classical, quantum, or even purely aesthetic weightings on the same base form.

Fourth, the method invites empirical investigation. Which mappings are most understandable to non-specialist audiences? Which visual or sonic forms best communicate overlap of contexts? When does aesthetic richness enhance understanding, and when does it obscure it? These are open interdisciplinary research questions.

XI. CONCLUSION

We have proposed and exemplified a concrete bridge between partition logic and Generative Logic. The bridge consists of a translation from finite partition logics with separating two-valued states into simple non-recursive grammars, together with a principled separation between formal skeleton, sign repertoire, and probabilistic overlay.

Using the V-logic L_{12} , we derived a modular visual artifact, the *Quantum Square*, and showed multiple renderings of the same source structure. We also gave additional formal examples, including a horizontal sum of binary partitions, a triangle-logic generalization, and two distinct probability overlays on the same logic.

The broader significance of the method is double. For design and artistic research, it opens a disciplined way of using logical structures as generative scores. For science communication, it offers a way to externalize complementarity and finite event structure without collapsing them into informal metaphor. In both cases, the central insight is the same: abstract structures need not remain abstract. They can be transformed into perceptible forms while retaining their formal identity.

Appendix A: A parameterized repertoire layer

The separation between structure and repertoire can be made more explicit by parameterizing the output mode. The following sketch shows the idea.

Listing 4. Sketch of a parameterized repertoire layer. A single structural skeleton can drive several media-oriented repertoires.

```
% structural rows as before:
row(a, [s1,s2,sep,s3,s4,s5]).
row(b, [s3,s4,sep,s1,s2,s5]).
row(c, [s5,sep,s1,s2,s3,s4]).
row(d, [s2,s4,sep,s1,s3,s5]).
row(e, [s1,s3,sep,s2,s4,s5]).

% multiple repertoires:
palette(color, s1, '[G] ').
palette(color, s2, '[B] ').
palette(color, s3, '[R] ').
palette(color, s4, '[O] ').
palette(color, s5, '[V] ').
palette(color, sep, '[#] ').

palette(letter, s1, 'A ').
```

```
palette(letter, s2, 'B ').
palette(letter, s3, 'C ').
palette(letter, s4, 'D ').
palette(letter, s5, 'E ').
palette(letter, sep, '| ').

palette(sound, s1, 'c4 ').
palette(sound, s2, 'e4 ').
palette(sound, s3, 'g4 ').
palette(sound, s4, 'a4 ').
palette(sound, s5, 'd5 ').
palette(sound, sep, '/ ').

render_symbol(Mode, Sym) :-
    palette(Mode, Sym, Out),
    format('~w', [Out]).

render_row(Mode, Name) :-
    row(Name, Symbols),
    forall(member(S, Symbols), render_symbol(Mode, S)),
    nl.
```

This code is conceptually important because it makes explicit that the structure does not belong to one medium only.

ACKNOWLEDGMENTS

This research arises from an ongoing dialogue between artistic research, design pedagogy, logic programming, and the foundations of quantum theory. Christian Jendreiko gratefully acknowledges collaborations and discussions in the context of ongoing visual and sonic experiments, including exchanges with Klaus Roeder and colleagues.

This research was funded in whole or in part by the *Austrian Science Fund (FWF)* [Grant DOI:10.55776/PIN5424624]. The author acknowledges TU Wien Bibliothek for financial support through its Open Access Funding Programme.

-
- [1] K. Svozil, *Randomness & Undecidability in Physics* (World Scientific, Singapore, 1993).
 - [2] M. Schaller and K. Svozil, Partition logics of automata, *II Nuovo Cimento B* **109**, 167 (1994).
 - [3] A. Dvurečenskij, S. Pulmannová, and K. Svozil, Partition logics, orthoalgebras and automata, *Helvetica Physica Acta* **68**, 407 (1995), arXiv:1806.04271.
 - [4] K. Svozil, *Quantum Logic*, Discrete Mathematics and Theoretical Computer Science (Springer, Singapore, 1998).
 - [5] K. Svozil, Logical equivalence between generalized urn models and finite automata, *International Journal of Theoretical Physics* **44**, 745 (2005), arXiv:quant-ph/0209136.
 - [6] C. Jendreiko, Generative logic: Teaching Prolog as generative AI in art and design, in *Workshop Proceedings of the 40th International Conference on Logic Programming (ICLP-WS 2024)*, CEUR Workshop Proceedings, Vol. 3799, edited by J. Arias *et al.* (CEUR-WS.org, Dallas, TX, 2024).
 - [7] C. Jendreiko, The simple generative logic grammar: A tool for teaching logical thinking through visual research in art and design, in *Joint Proceedings of the Workshops and Doctoral Consortium of the 41st International Conference on Logic Programming (ICLP-WS-DC 2025)*, CEUR Workshop Proceedings, Vol. 4117, edited by D. Azzolini *et al.* (CEUR-WS.org, Rende, 2025).
 - [8] R. J. Greechie, Orthomodular lattices admitting no states, *Journal of Combinatorial Theory. Series A* **10**, 119 (1971).
 - [9] S. Kochen and E. P. Specker, The problem of hidden variables in quantum mechanics, *Journal of Mathematics and Mechanics (now Indiana University Mathematics Journal)* **17**, 59 (1967).
 - [10] L. Lovász, On the Shannon capacity of a graph, *IEEE Transactions on Information Theory* **25**, 1 (1979).
 - [11] M. Grötschel, L. Lovász, and A. Schrijver, Relaxations of vertex packing, *Journal of Combinatorial Theory, Series B* **40**, 330 (1986).
 - [12] J. Piaget, *Der Strukturalismus* (Walter Verlag, Olten, Freiburg im Breisgau, 1973).
 - [13] N. Goodman, *Languages of Art: An Approach to a Theory of Symbols*, 2nd ed. (Hackett, Indianapolis, 1976).
 - [14] R. Wright, Generalized urn models, *Foundations of Physics* **20**, 881 (1990).