



Lecture 18:

LLMs: Prompting and Finetuning

Instructor: Swabha Swayamdipta
USC CSCI 544 Applied NLP
Oct 29, Fall 2024



Announcements

- Today: Tue, 10/29 - Project proposal
- Thu, 10/31 - Lecture + Paper Presentation I
- Tue, 11/5 - Lecture + Paper Presentation II
- Thu, 11/7 - Quiz 4 + Paper Presentation III
- Tue, 11/12 - Quiz 5 + Paper Presentation IV
- Thu, 11/14 Guest lecture on LLM Pretraining by Prof. Willie Neiswanger on 11/14 + HW4 due
 - Questions from lecture materials will be included in final exam
- Quizzes 4 and 5 - all topics after the midterms
 - Consider these as practice tests for final exams
- Paper Presentation:
 - Presenter will be announced couple of hours before the presentation (so please prepare accordingly!)
 - The presenter is responsible for the team's grade, so please ensure your teammates to be prepared!
 - Google Slides: Max 3 slides (share by 11:59 PM the night before)
 - Total time: 5 minutes (3 min presentation + 2 min QA)
 - Content:
 - Slide 1: Main Research Question in the paper,
 - Slide 2: Main Results Summarized,
 - Slide 3: How this influences your project.

Lecture Outline

- Announcements
- Recap: Decoding Algorithms
- Evaluating Generated Language
- LLMs
 - Pretraining
 - Post-training with Supervised Finetuning:
 - Instruction Tuning
 - Interacting with LLMs: Prompting
 - Post-training with Alignment with Human Feedback:
 - Preference Tuning: RLHF [Next Class]

Recap:

Natural Language Generation

- Search Algorithms

Beam Search Decoding


- Core idea: On each step of decoder, keep track of the k most probable partial translations (which we call hypotheses)
 - k is the beam size (in practice around 5 to 10, in NMT)
- A hypothesis has a score which is its log probability:

$$\text{score}(y_1, \dots, y_t) = \log P_{\text{LM}}(y_1, \dots, y_t | x) = \sum_{i=1}^t \log P_{\text{LM}}(y_i | y_1, \dots, y_{i-1}, x)$$

- Scores are all negative, and higher score is better
- We search for high-scoring hypotheses, tracking top k on each step
- Beam search is not guaranteed to find optimal solution
- But much more efficient than exhaustive search!

Beam Search Decoding: Example

Beam size = $k = 2$. Blue numbers = $\text{score}(y_1, \dots, y_t) = \sum_{i=1}^t \log P_{\text{LM}}(y_i | y_1, \dots, y_{i-1}, x)$

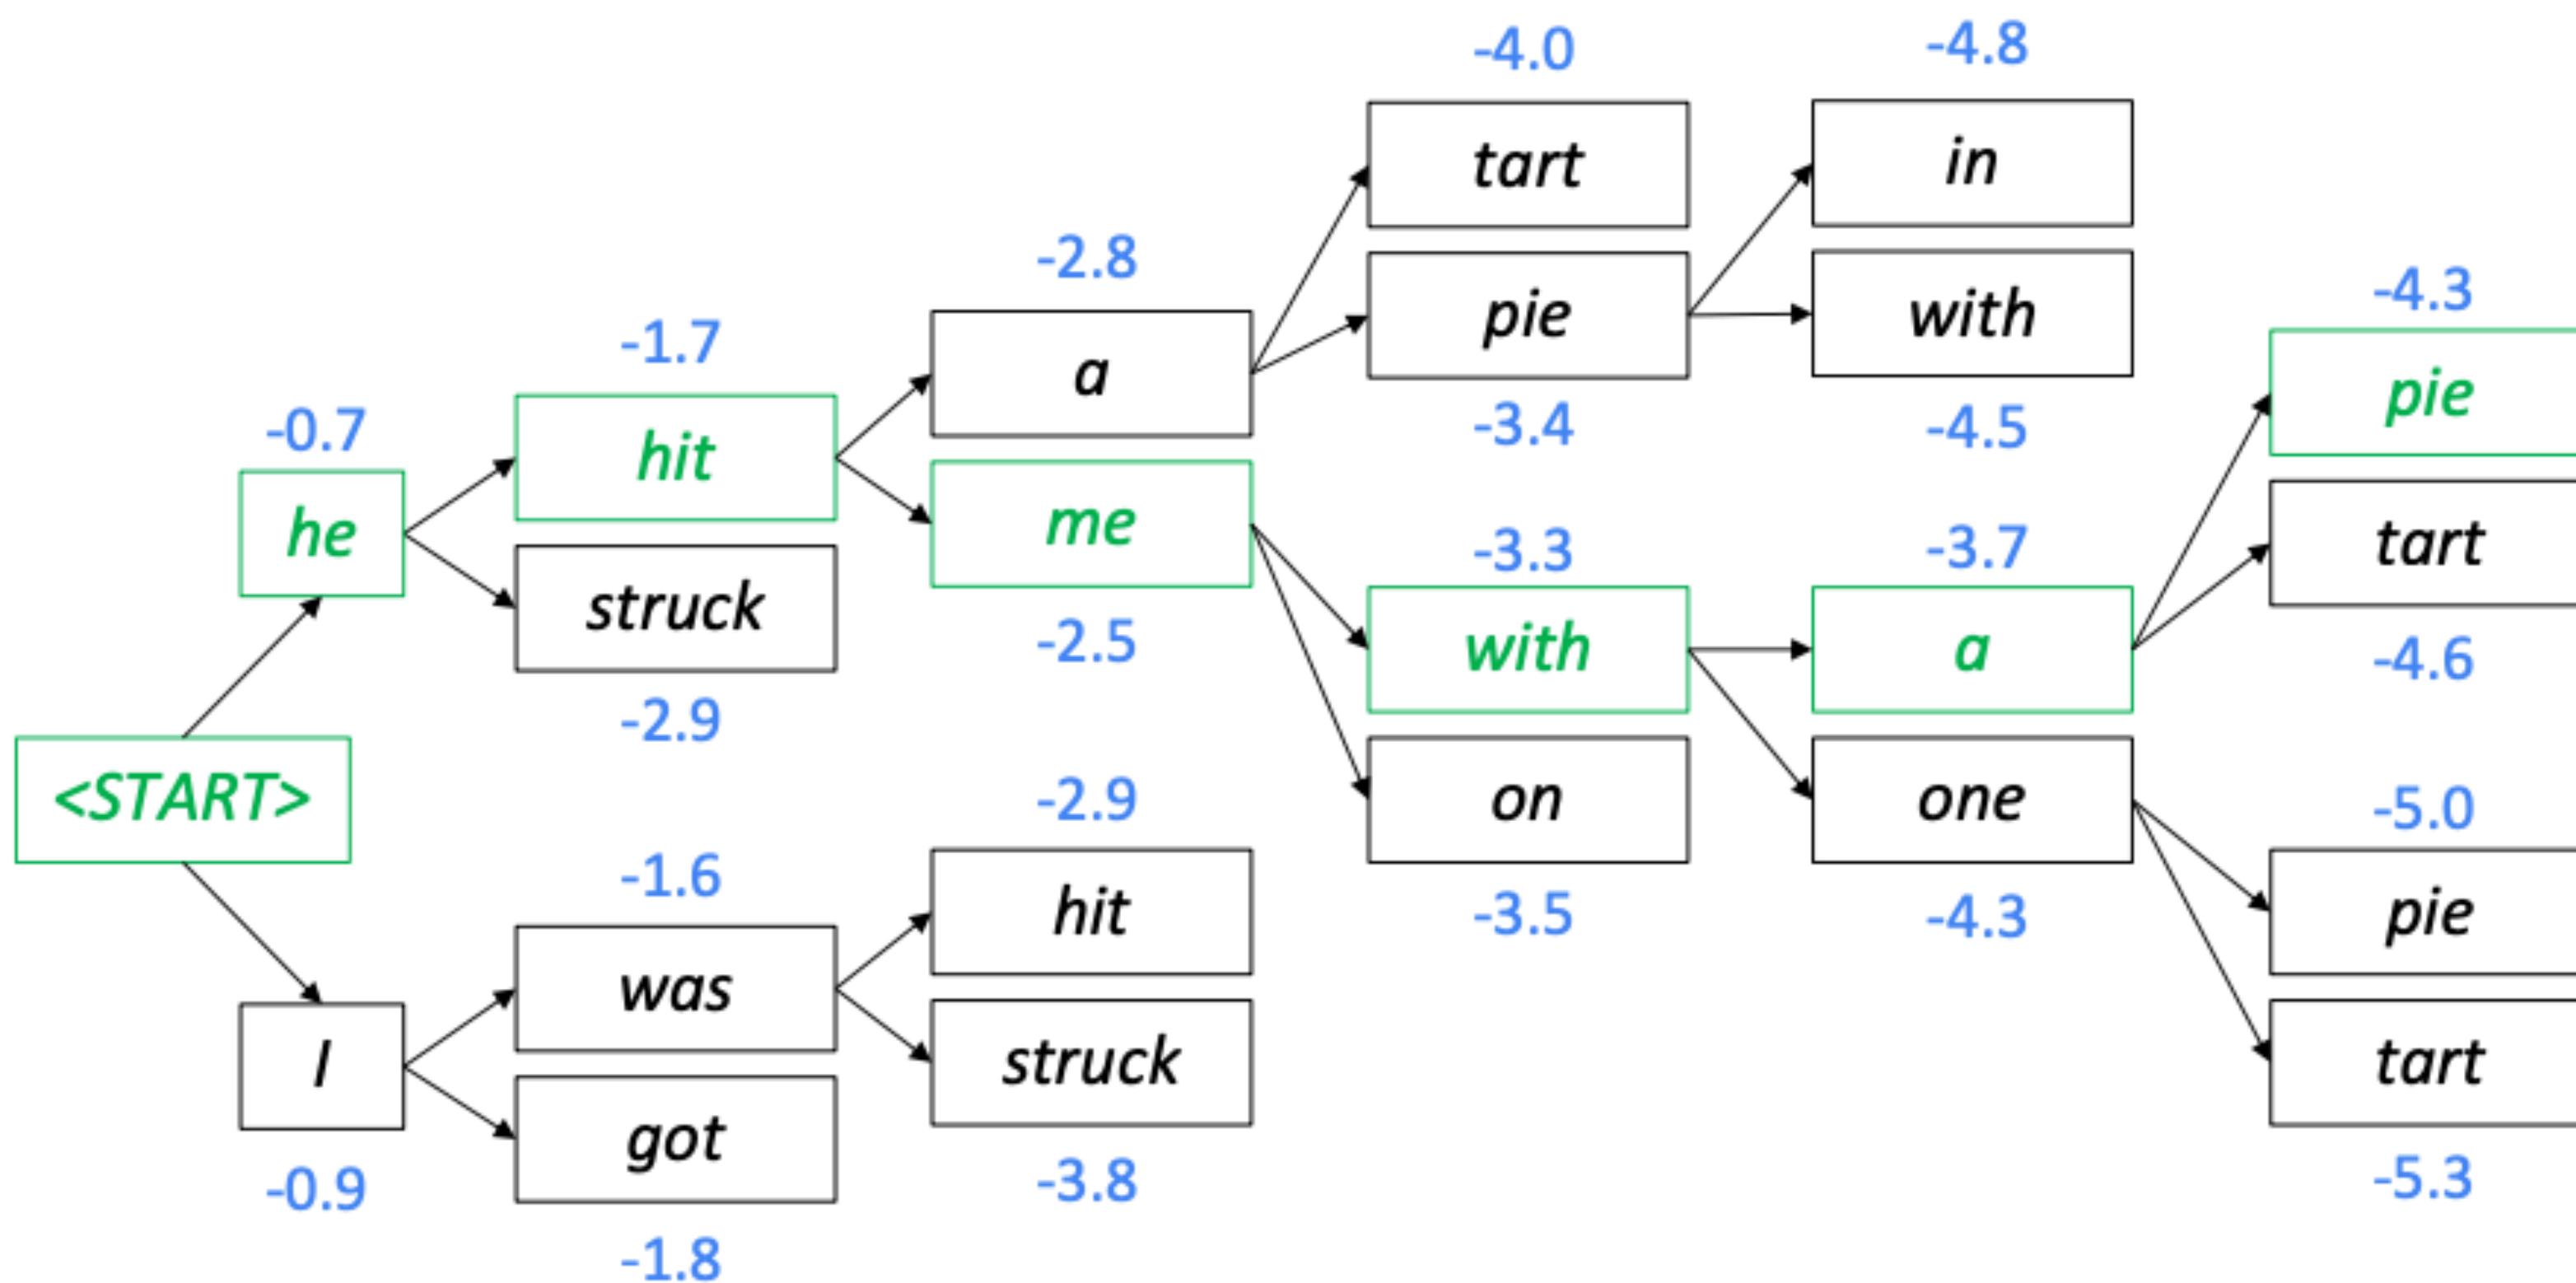

Backtrack to obtain the full hypothesis

Beam Search Decoding: Stopping Criterion

- Greedy Decoding is done until the model produces an </s> token
 - For e.g. <s> he hit me with a pie </s>
- In Beam Search Decoding, different hypotheses may produce </s> tokens at different time steps
 - When a hypothesis produces </s>, that hypothesis is complete.
 - Place it aside and continue exploring other hypotheses via beam search.
- Usually we continue beam search until:
 - We reach time step T (where T is some pre-defined cutoff), or
 - We have at least n completed hypotheses (where n is pre-defined cutoff)

Beam Search Decoding: Longer Hypotheses

- We have our list of completed hypotheses. Now how to select top one?
- Each hypothesis y_1, \dots, y_t on our list has a score

$$\text{score}(y_1, \dots, y_t) = \log P_{\text{LM}}(y_1, \dots, y_t | x) = \sum_{i=1}^t \log P_{\text{LM}}(y_i | y_1, \dots, y_{i-1}, x)$$

- Problem with this: longer hypotheses have lower score
- Fix: Normalize by length. Use this to select top one instead

$$\frac{1}{t} \sum_{i=1}^t \log P_{\text{LM}}(y_i | y_1, \dots, y_{i-1}, x)$$

Maximization Based Decoding


- Either greedy or beam search
- Beam search can be more effective with large beam width, but also more expensive
- Another key issue:

Generation can be bland or repetitive (also called degenerate)

- Context:** In a shocking finding, scientist discovered a herd of unicorns living in a remote, previously unexplored valley, in the Andes Mountains. Even more surprising to the researchers was the fact that the unicorns spoke perfect English.
- Continuation:** The study, published in the Proceedings of the National Academy of Sciences of the United States of America (PNAS), was conducted by researchers from the **Universidad Nacional Autónoma de México (UNAM)** and **the Universidad Nacional Autónoma de México (UNAM/Universidad Nacional Autónoma de México/Universidad Nacional Autónoma de México/Universidad Nacional Autónoma de México/Universidad Nacional Autónoma de México...)**


Solution: Don't Maximize, Pick a Sample

- Sample a token from the distribution of tokens.
- But this is not a truly random sample, it is a sample for the learned model distribution
 - Respects the probabilities, without going just for the maximum probability option
 - Or else, you would get something meaningless
 - Many good options which are not the maximum probability!

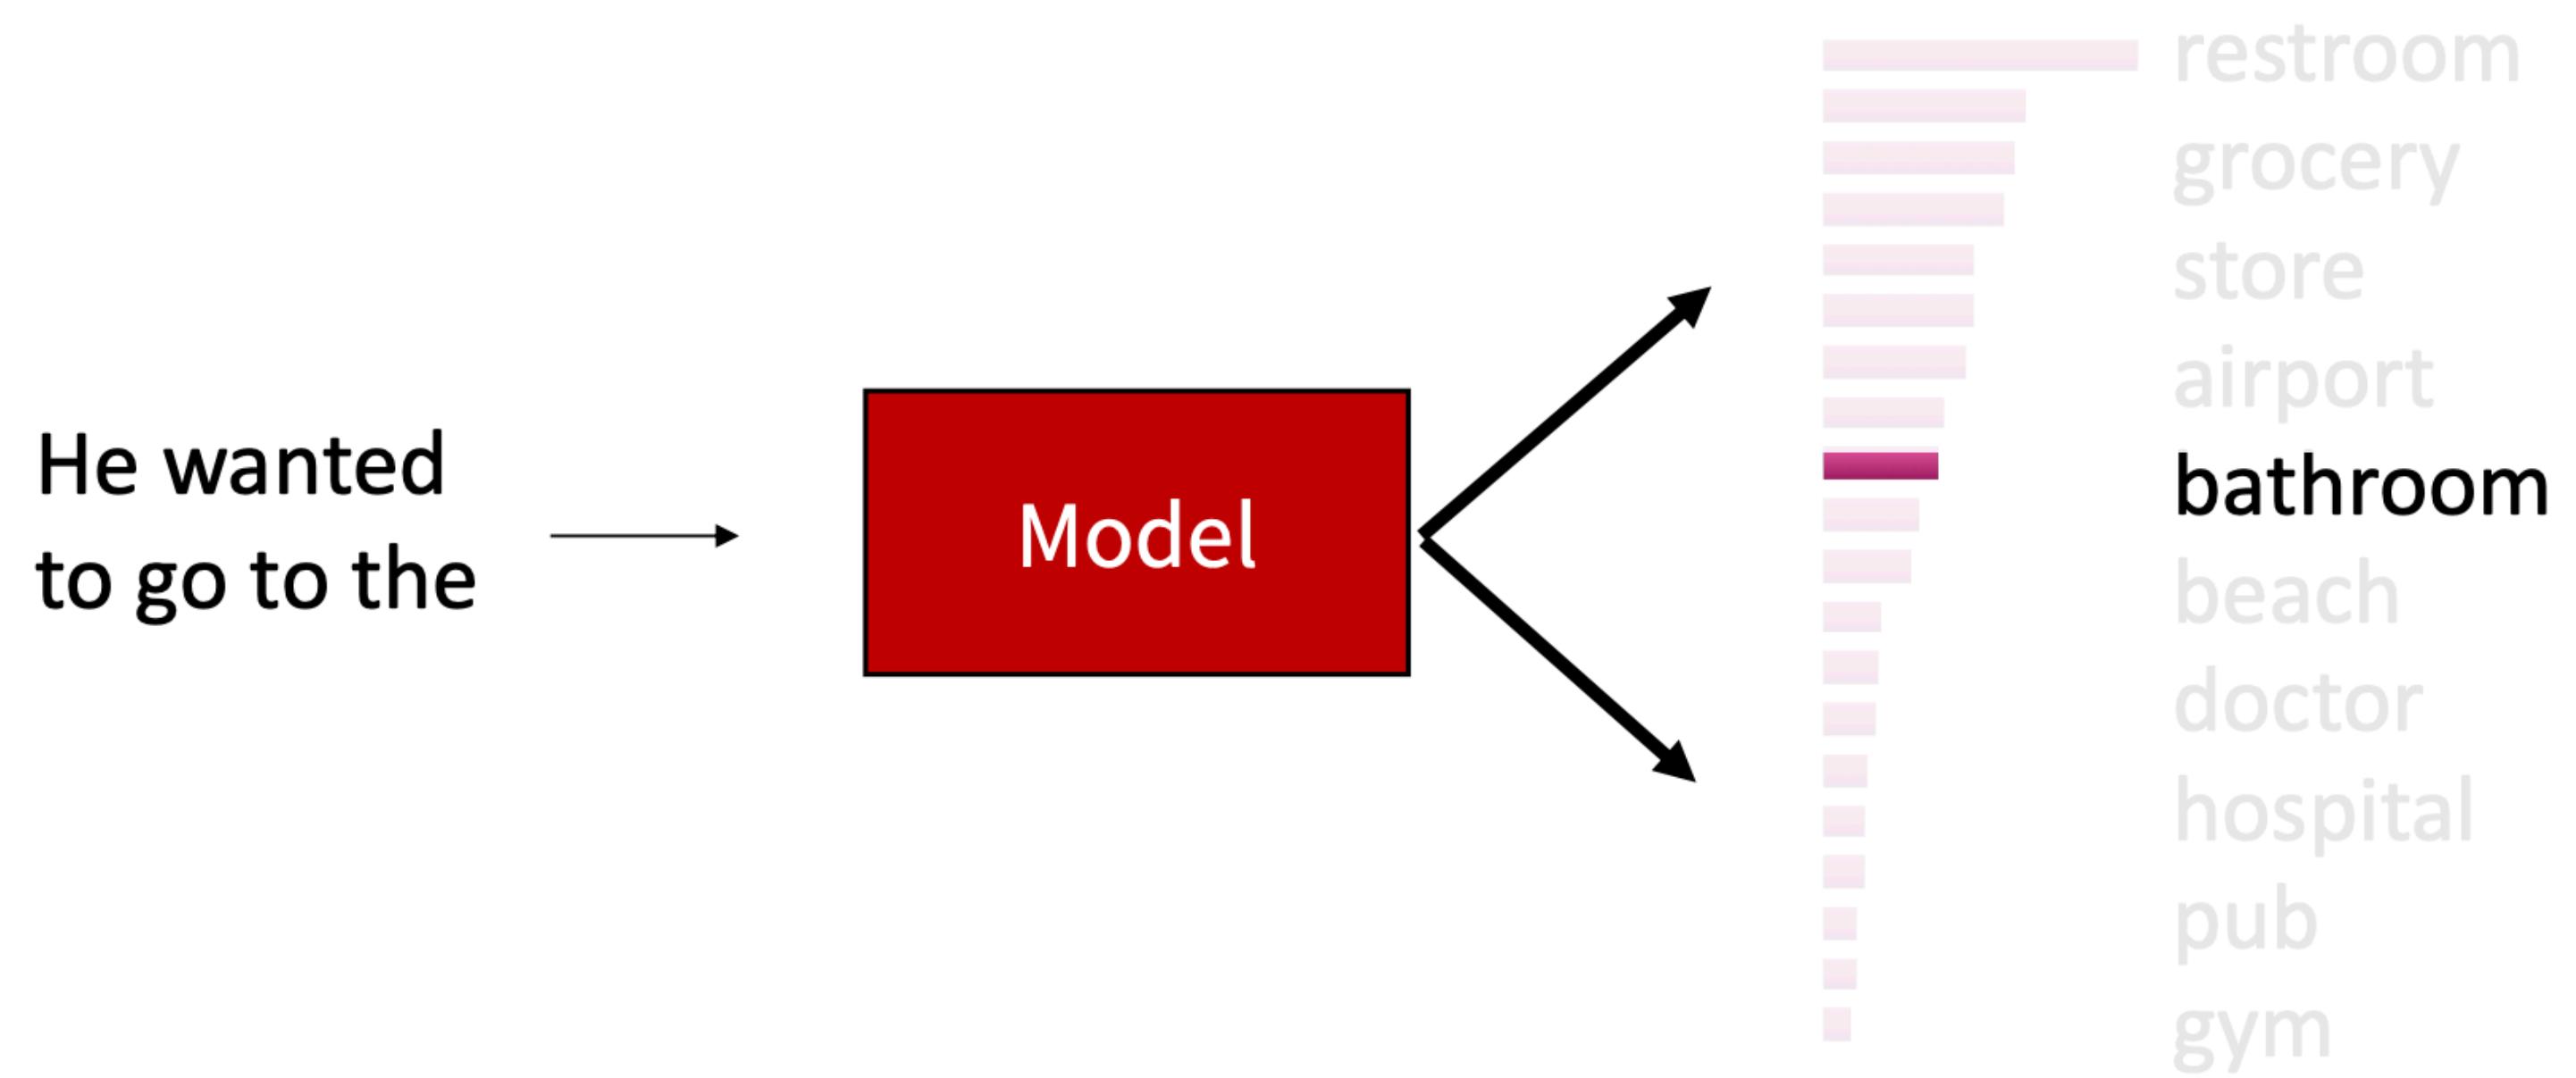

Sampling from a Distribution


- Choose x by randomly sampling from $p(x)$
 - Construct cumulative distribution function $P(x)$
 - Sample value q between 0-1 from a uniform random distribution
 - Pick x with largest $P(x)$ such that $P(x) \leq q$

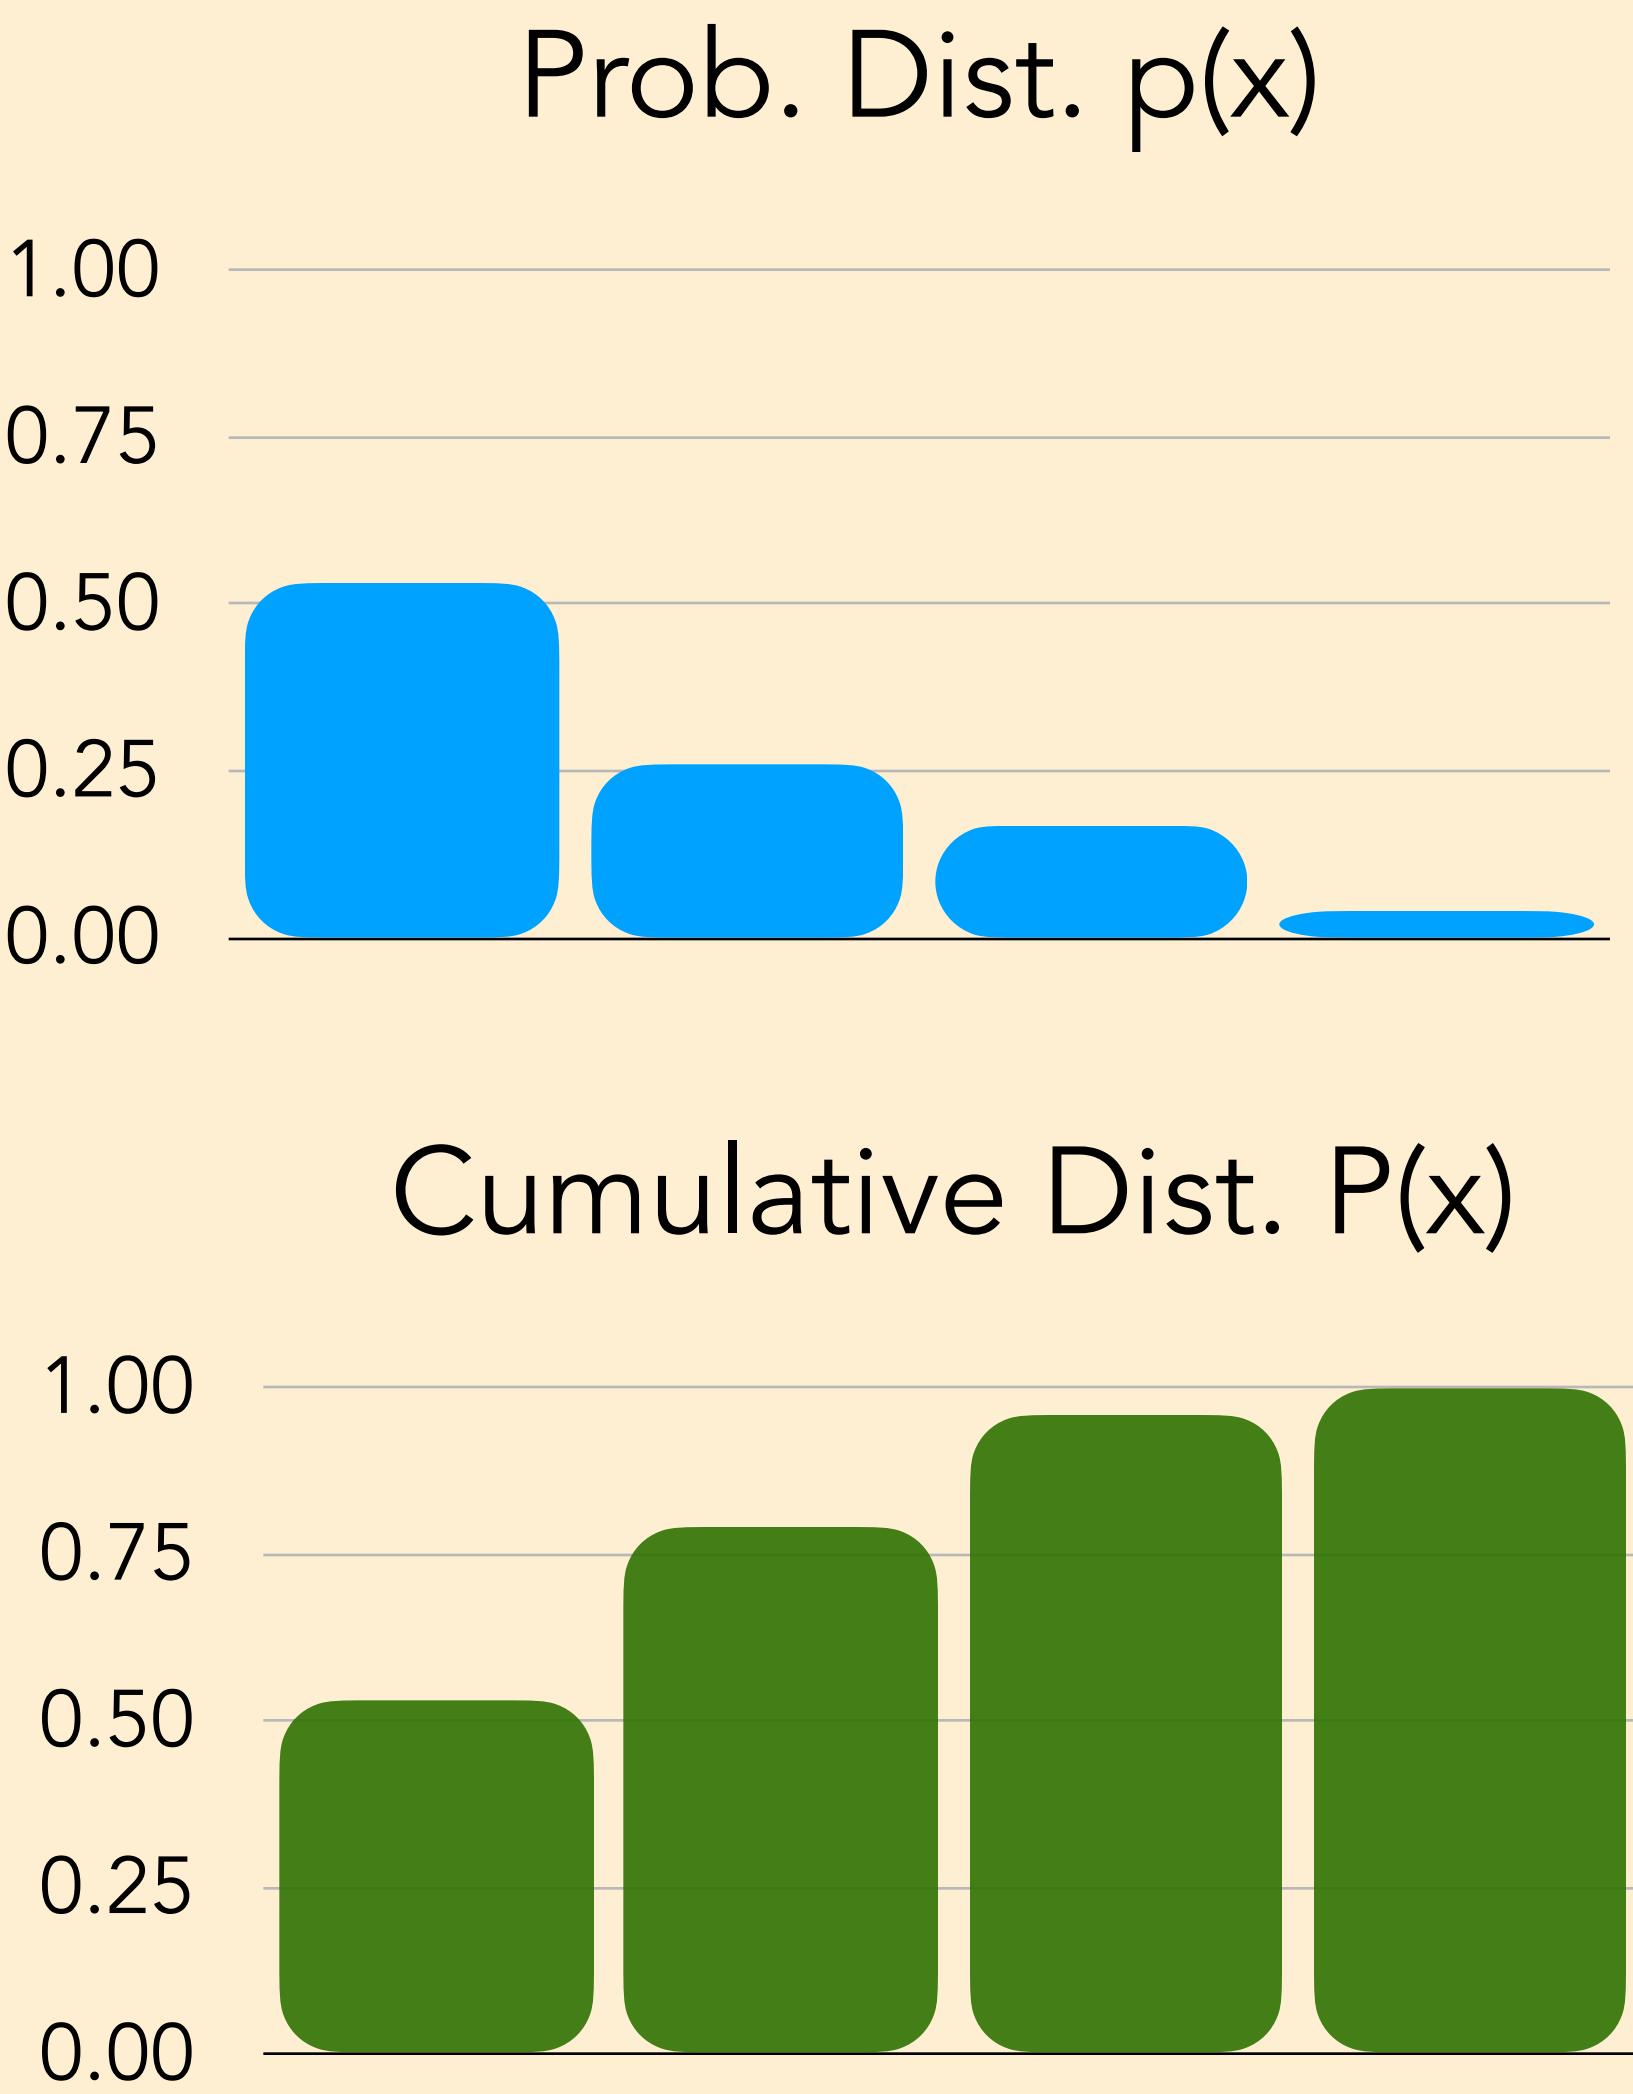

Pure / Ancestral Sampling

- Sample directly from P_t
- Still has access to the entire vocabulary
- But if the model distributions are of low quality, generations will be of low quality as well
- Often results in ill-formed generations
 - No guarantee of fluency

He wanted
to go to the

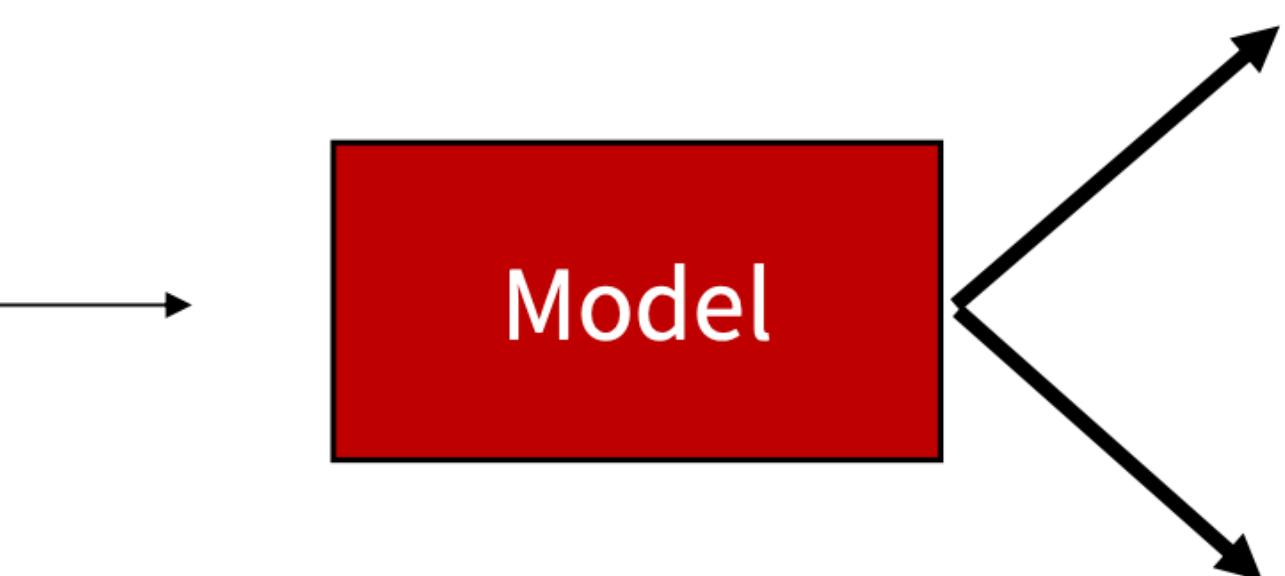


$$y_t \sim P_t(w) = \frac{\exp(S_w)}{\sum_{v \in V} \exp(S_v)}$$



Top- K Sampling

- Problem: Ancestral sampling makes every token in the vocabulary an option
 - Even if most of the probability mass in the distribution is over a limited set of options, the tail of the distribution could be very long and in aggregate have considerable mass
 - Many tokens are probably really wrong in the current context. Yet, we give them individually a tiny chance to be selected.
 - But because there are many of them, we still give them as a group a high chance to be selected.
- Solution: Top- K sampling
 - Only sample from the top K tokens in the probability distribution

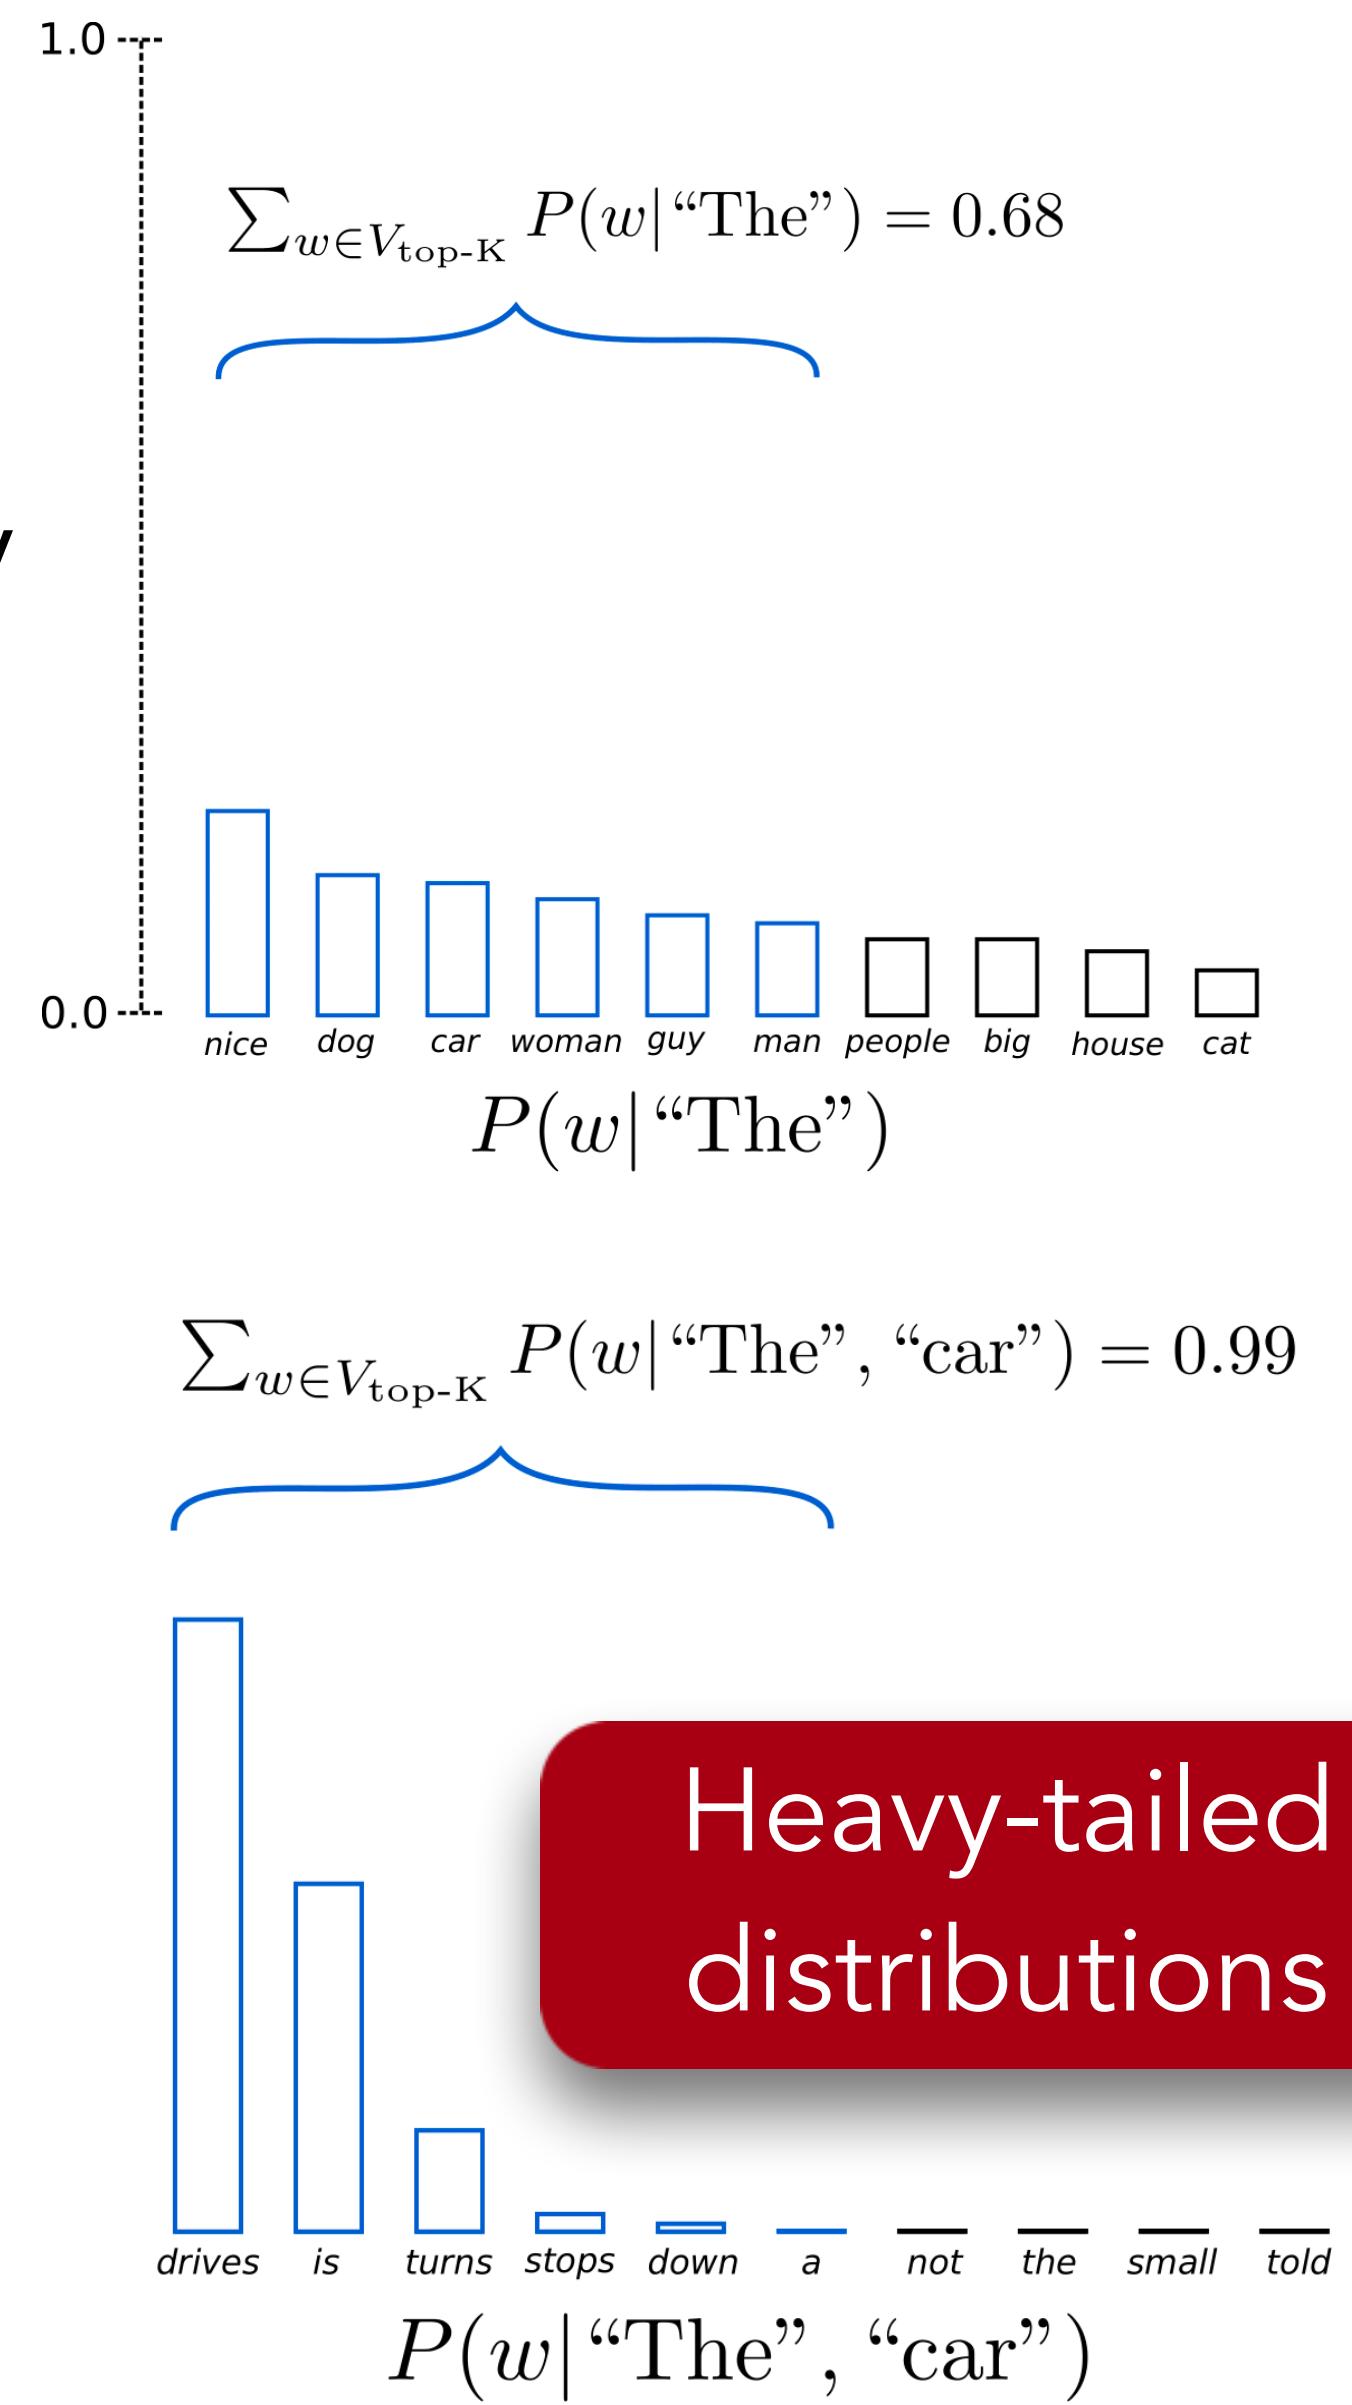


Heavy-tailed
distributions


Nucleus (Top- P) Sampling

- Top- P sampling: Different threshold for different contexts
 - Sample from all tokens in the top P cumulative probability mass (i.e., where mass is concentrated)
 - Varies K depending on the uniformity of P_t


$$P_t^1(y_t = w | \{y\}_{<t})$$

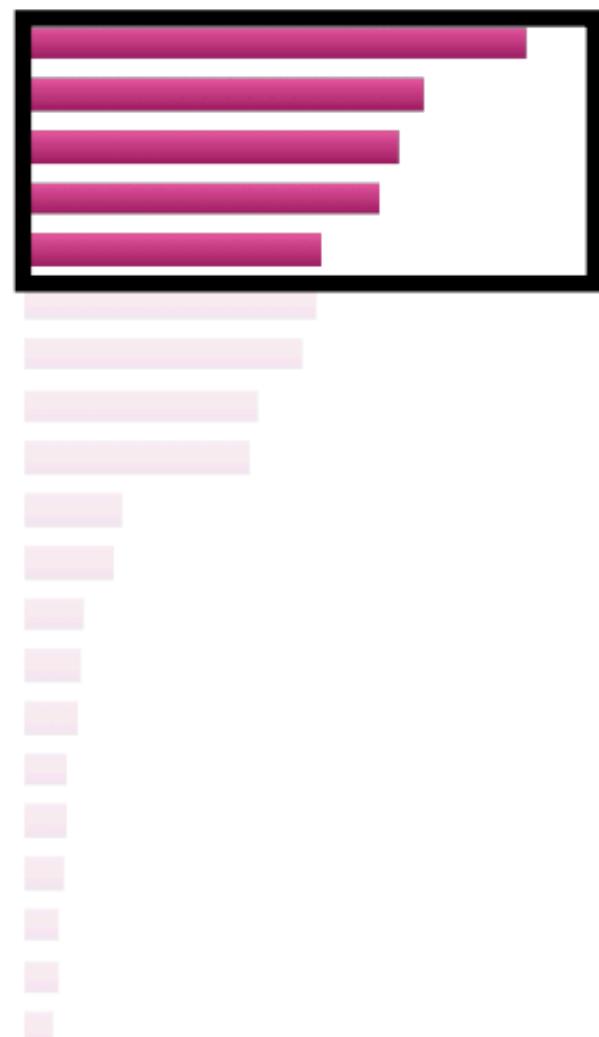

$$P_t^2(y_t = w | \{y\}_{<t})$$

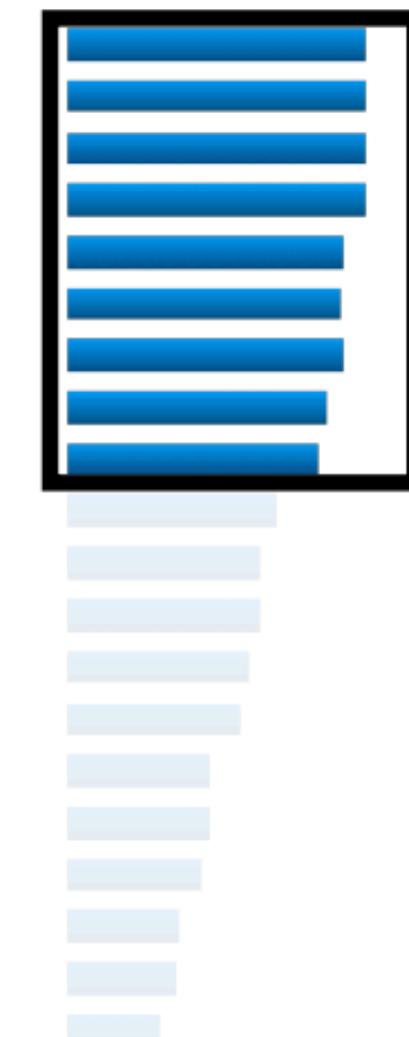


$$P_t^3(y_t = w | \{y\}_{<t})$$

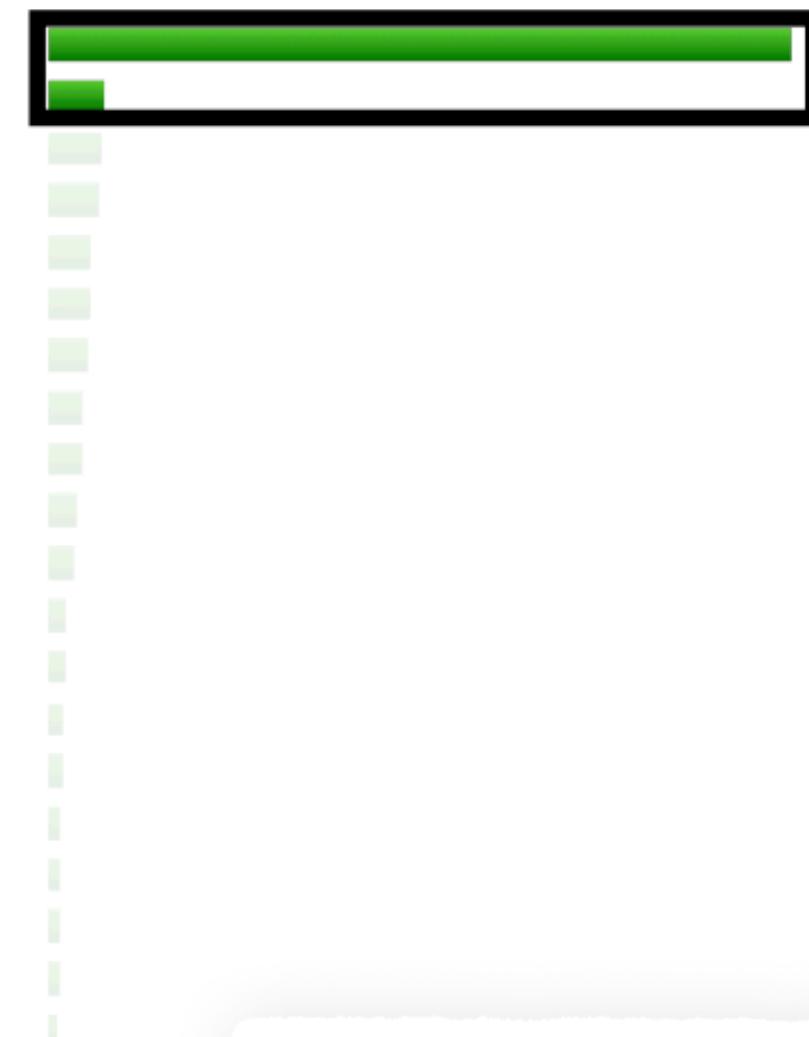

Temperature Scaling

- We can apply a temperature hyperparameter τ to the softmax to rebalance P_t
- Unlike truncation-based sampling, temperature reshapes the probability distribution
- Most current approaches use this decoding: Ancestral sampling with temperature scaling

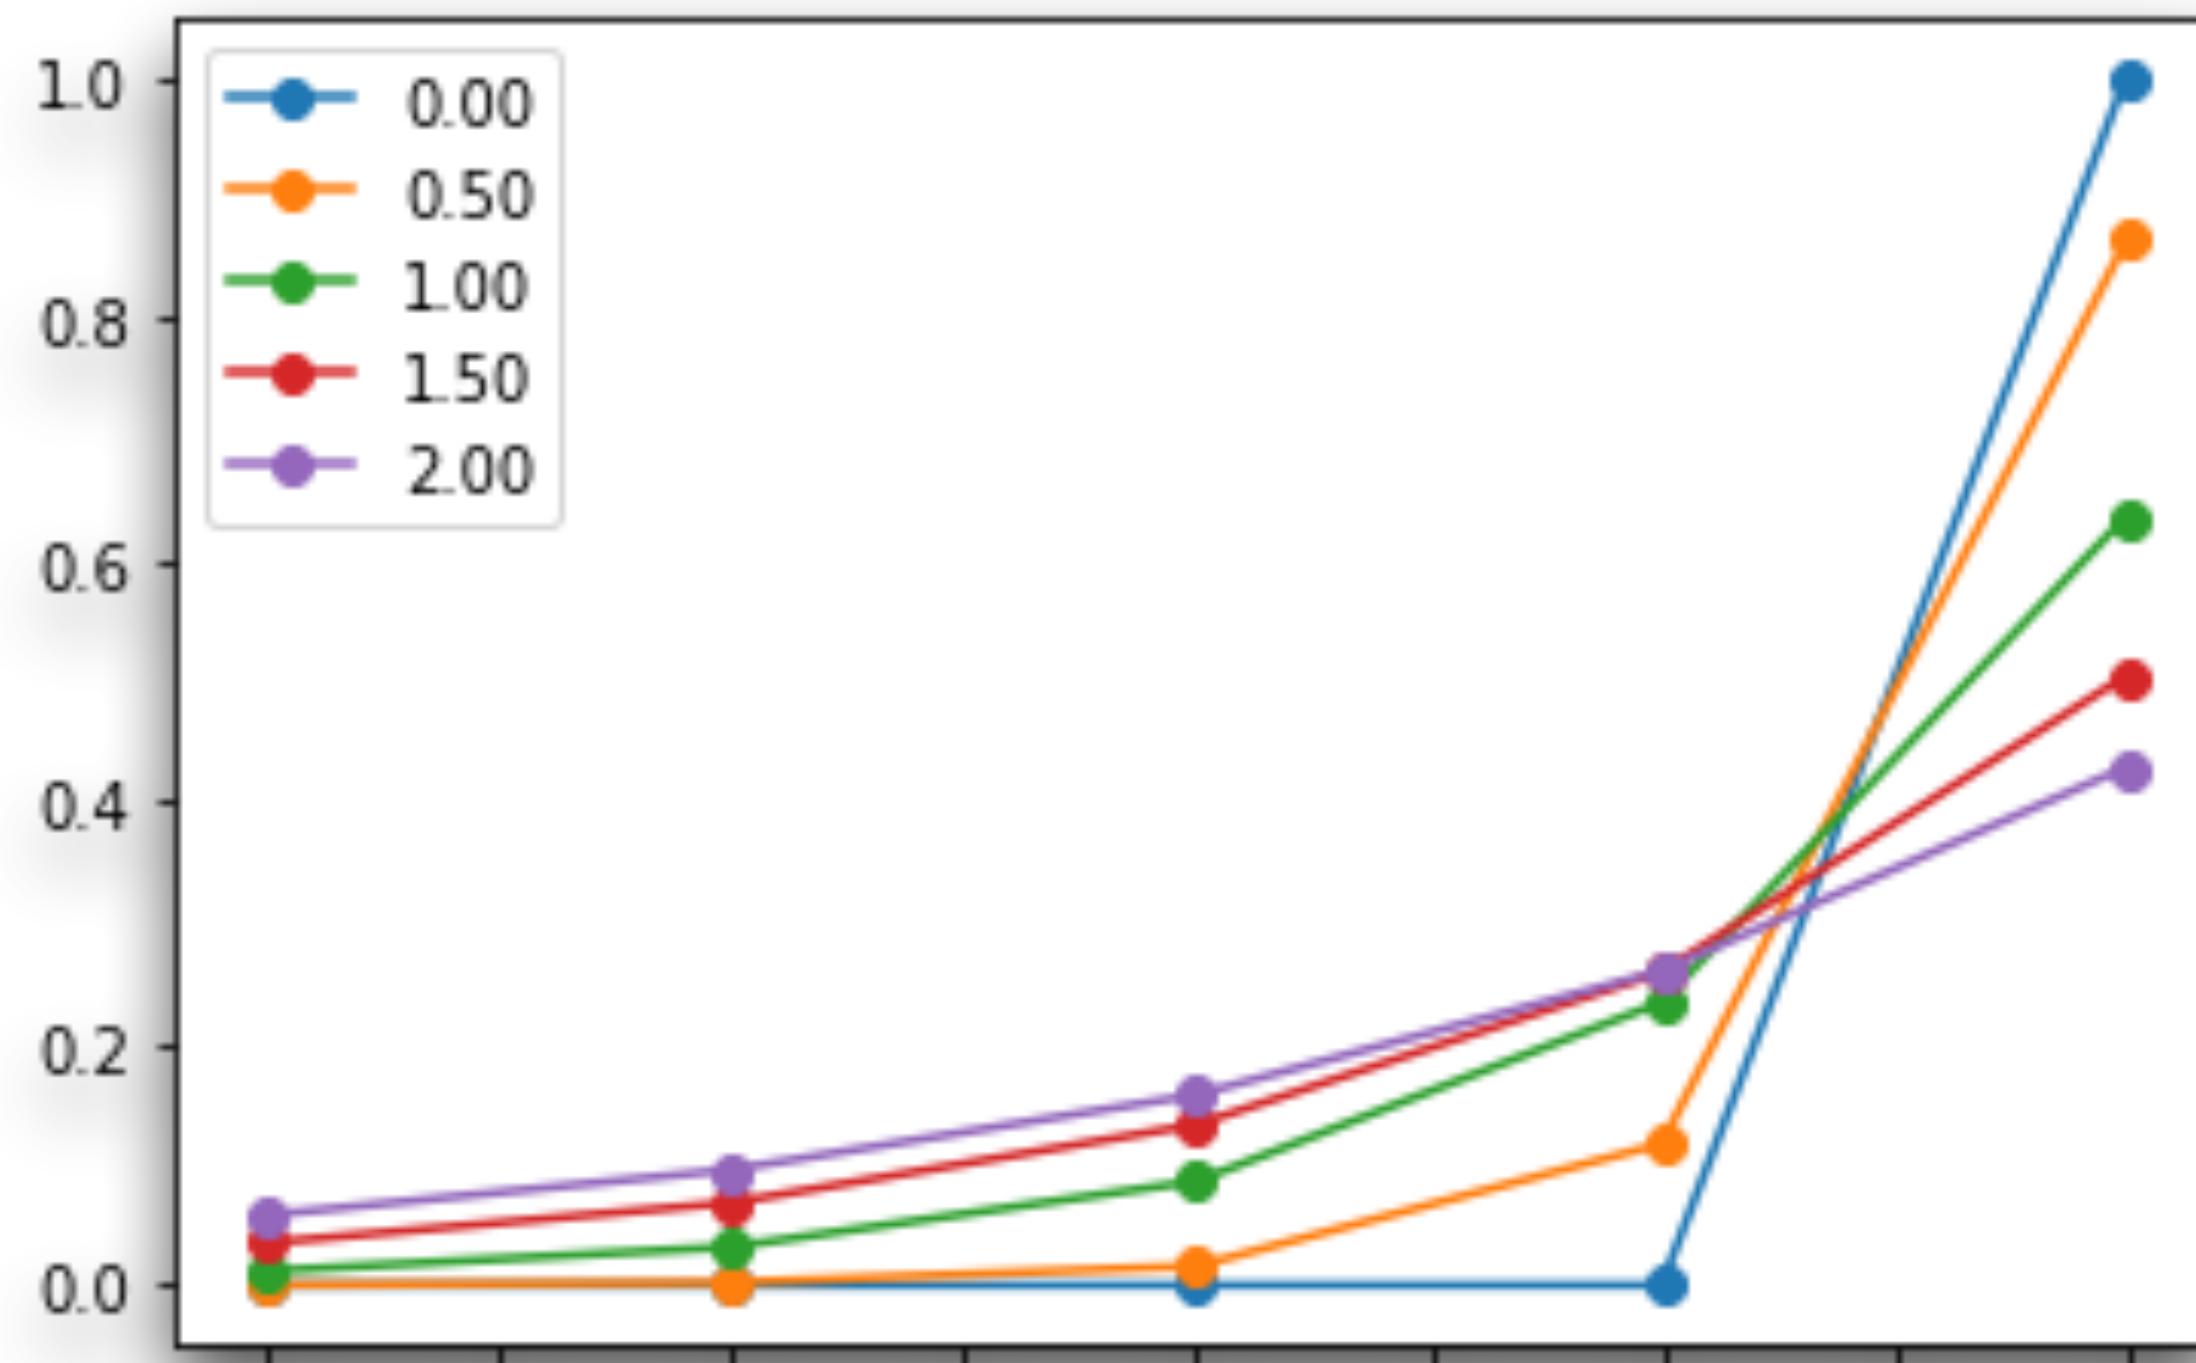

$$P(y_t = w) = \frac{\exp(S_w/\tau)}{\sum_{v \in V} \exp(S_v/\tau)}$$

Temperature is a hyperparameter for decoding: It can be tuned for both beam search and ancestral sampling.

Lecture Outline

- Announcements
- Recap: Decoding Algorithms
- Evaluating Generated Language
- LLMs
 - Pretraining
 - Post-training with Supervised Finetuning:
 - Instruction Tuning
 - Interacting with LLMs: Prompting
 - Post-training with Alignment with Human Feedback:
 - Preference Tuning: RLHF [Next Class]

Evaluating Generations

Evaluation Strategies

- With Reference
 - Lexical Matching
 - Semantic Matching
- Without Reference
 - Perplexity
 - Model-Based Metrics
 - Advanced: Distributional Matching
 - Simplest, Most Reliable Strategy to-date: Human Evaluation
 - Even simpler and least reliable: Auto Evaluation

Ref: They walked to the grocery store .

Gen: The woman went to the hardware store .

The diagram illustrates a comparison between a reference sentence and a generated sentence. The reference sentence is "They walked to the grocery store .". The generated sentence is "The woman went to the hardware store .". Four arrows point from the words "to the grocery store" in the reference sentence to the words "went to the hardware store" in the generated sentence, highlighting a potential error or mismatch in the generated text.

Reference-Based Metrics

Ref: They walked **to the grocery store** .

Gen: The woman **went to the hardware store** .

The diagram illustrates the comparison between a reference sentence and a generated sentence. The reference sentence is "They walked **to the grocery store** ." The generated sentence is "The woman **went to the hardware store** ." Arrows point from the blue highlighted words "to the grocery store" in the reference to the corresponding red highlighted words "went to the hardware store" in the generation. Specifically, one arrow points from "to" to "went", another from "the" to "the", and two from "grocery store" to "hardware store".

- Only possible for close-ended generation tasks
- Compute a score that indicates the lexical similarity between generated and gold-standard (human-written) text
- Fast and efficient and widely used
- n -gram overlap metrics (e.g., BLEU, ROUGE, etc.)

BLEU

- Stands for Bilingual Evaluation Understudy
- BLEU compares the machine-written translation to one or several human-written translation(s), and computes a similarity score based on:
 - Geometric mean of n-gram precision (usually for 1, 2, 3 and 4-grams)
 - Plus a penalty for too-short system translations
- BLEU is useful but imperfect
 - There are many valid ways to translate a sentence
 - So a good translation can get a poor BLEU score because it has low n-gram overlap with the human translation
- Precision-based metric

Precision, Recall and F-1

- True Positives, True Negatives, False Positives and False Negatives

$$\text{Precision} = \frac{TP}{TP + FP}$$

Of all the items in the prediction, how many match the ground truth

$$\text{Recall} = \frac{TP}{TP + FN}$$

Of all the items in the ground truth, how many are correctly predicted

$$F_1 = \frac{2 * PR}{P + R}$$

Harmonic Mean of Precision and Recall

Different value for different classes!

BLEU: Details

- Purely **precision-based** rather than combining precision and recall.
- BLEU score for a corpus of candidate translation sentences is a function of
 - the n-gram word precision over all the sentences
 - combined with a brevity penalty computed over the corpus as a whole.
- Consider a corpus composed of a single sentence
 - The unigram precision for this corpus is the percentage of unigram tokens in the candidate translation that also occur in the reference translation, and ditto for bigrams and so on, up to 4-grams
 - It computes this n-gram precision for unigrams, bigrams, trigrams, and 4-grams and takes the geometric mean
- Because BLEU is a word-based metric, it is very sensitive to word tokenization, making it impossible to compare different systems if they rely on different tokenization

$$p_n =$$


$$\frac{\sum_{C \in \{Candidates\}} \sum_{n\text{-gram} \in C} Count_{clip}(n\text{-gram})}{\sum_{C' \in \{Candidates\}} \sum_{n\text{-gram}' \in C'} Count(n\text{-gram}')}$$

$$BP = \begin{cases} 1 & \text{if } c > r \\ e^{(1-r/c)} & \text{if } c \leq r \end{cases} .$$

Then,

$$BLEU = BP \cdot \exp \left(\sum_{n=1}^N w_n \log p_n \right) .$$

BLEU: Example

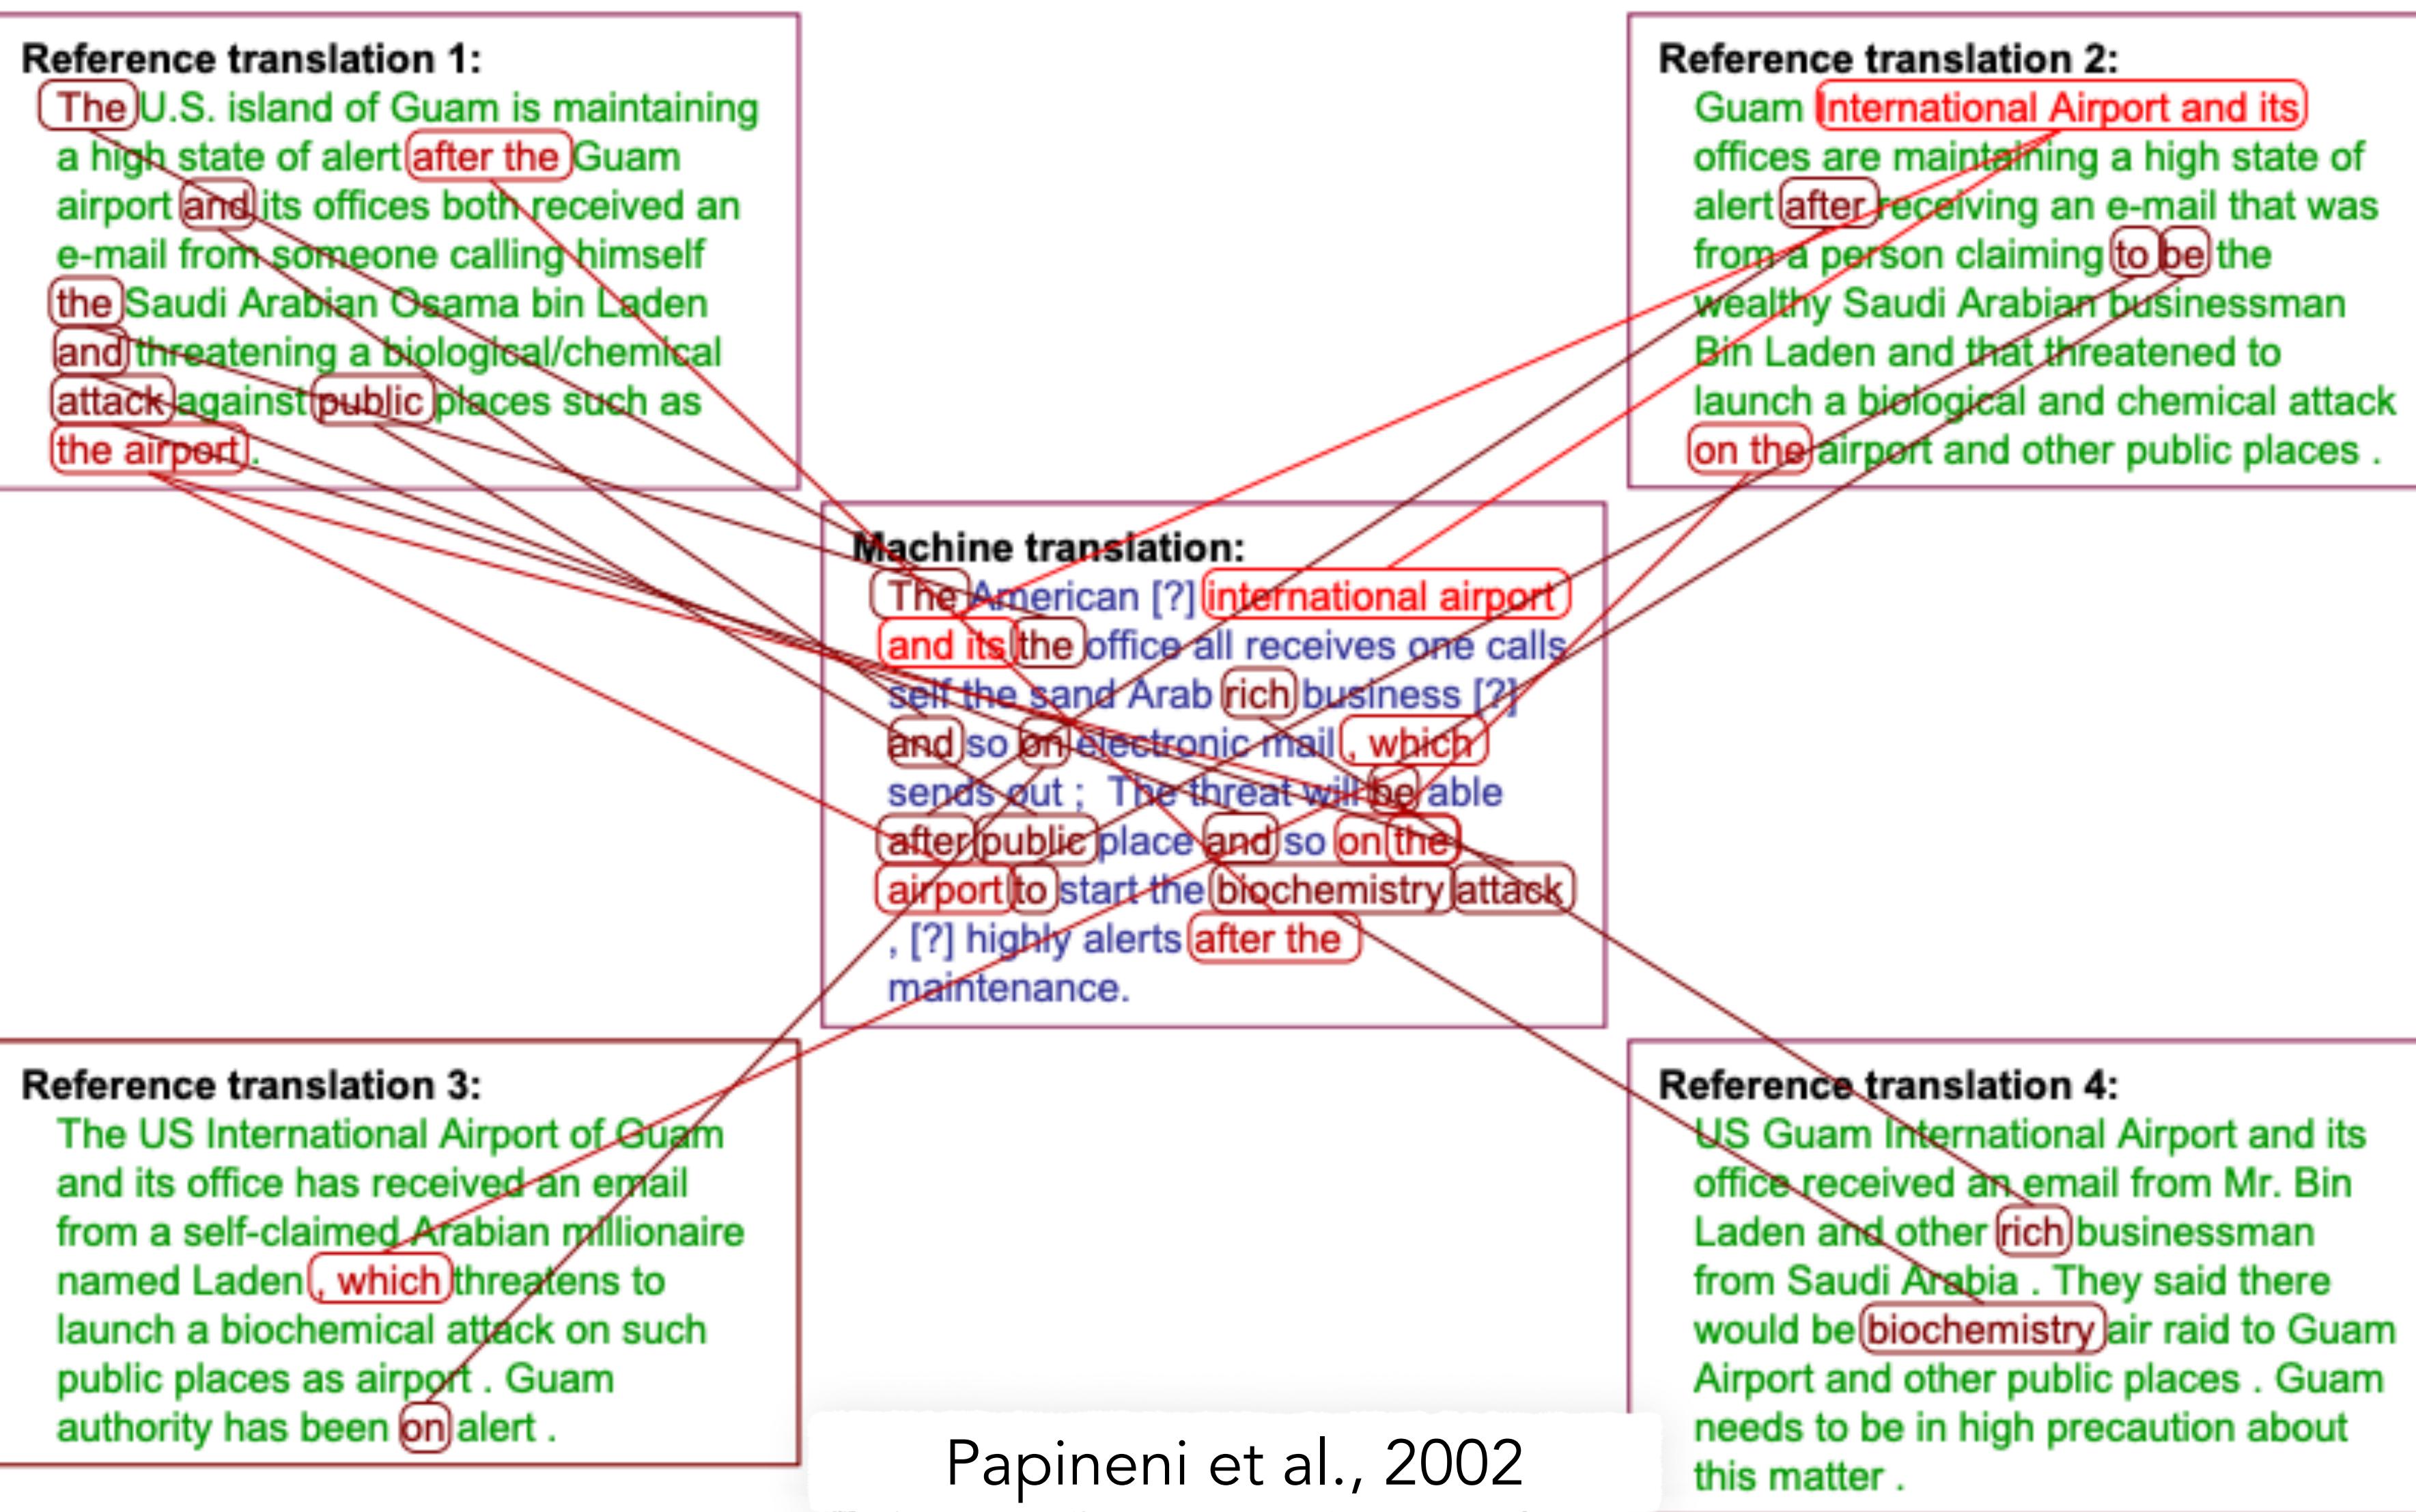

ROUGE

- Stands for “Recall-Oriented Understudy for Gisting Evaluation”
- Originally created for evaluating automatic summarization as well as machine translation
- Comparing an automatically produced summary or translation against a set of reference summaries (typically human-produced)
- Four variants:
 - ROUGE-N
 - ROUGE-L
 - ROUGE-S
 - ROUGE-W

ROUGE: Details

- **ROUGE-N:** measures **unigram**, **bigram**, **trigram** and higher order n-gram overlap
 - n-gram recall between a candidate summary and a set of reference summaries
- **ROUGE-L:** measures **longest matching sequence** of words using LCS.
 - Does not require consecutive matches but in-sequence matches that reflect sentence level word order.
 - Since it automatically includes longest in-sequence common n-grams, you don't need a predefined n-gram length.
- **ROUGE-S:** Is any pair of words in a sentence in order, allowing for arbitrary gaps.
 - Also be called skip-gram concurrence.
 - For example, **skip-bigram** measures the overlap of word pairs that can have a maximum of two gaps in between words. As an example, for the phrase “cat in the hat” the skip-bigrams would be “cat in, cat the, cat hat, in the, in hat, the hat”.
- **ROUGE-W:** Weighted Longest Common Subsequence

Evaluating Generation: Other Options

- Perplexity!
- Model-based Metrics (BERTScore, BARTScore, Word Mover's Distance, BLEURT)
 - Use learned representations of words and sentences to compute semantic similarity between generated and reference texts
 - No more n-gram bottleneck because text units are represented as embeddings!
 - The embeddings are pretrained, distance metrics used to measure the similarity can be fixed
- Automatic metrics fall short of matching human decisions
- So, Human Evaluation!

Human Evaluation

- Ask humans to evaluate the quality of generated text
 - Along specific axes: fluency, coherence / consistency, factuality and correctness, commonsense, etc.
 - Mostly done via crowdsourcing
- Human judgments are regarded as the gold standard
- Of course, we know that human eval is slow and expensive
- Beyond the cost of human eval, it's still far from perfect:
 - Humans Evaluation is hard:
 - Results are inconsistent / not reproducible
 - Can be subjective!
 - Misinterpret your question
 - Precision not recall



Rising Popularity: Automatic Evaluation

AlpacaFarm: A Simulation Framework for Methods that Learn from Human Feedback

Yann Dubois*
Stanford

Xuechen Li*
Stanford

Rohan Taori*
Stanford

Tianyi Zhang*
Stanford

Ishaan Gulrajani
Stanford

Jimmy Ba
University of Toronto

Carlos Guestrin
Stanford

Percy Liang
Stanford

Tatsunori B. Hashimoto
Stanford

Cheap and theoretically consistent with human evaluation. BUT... reliability?
Models evaluating their own generations may lead to weird mode collapsing effect

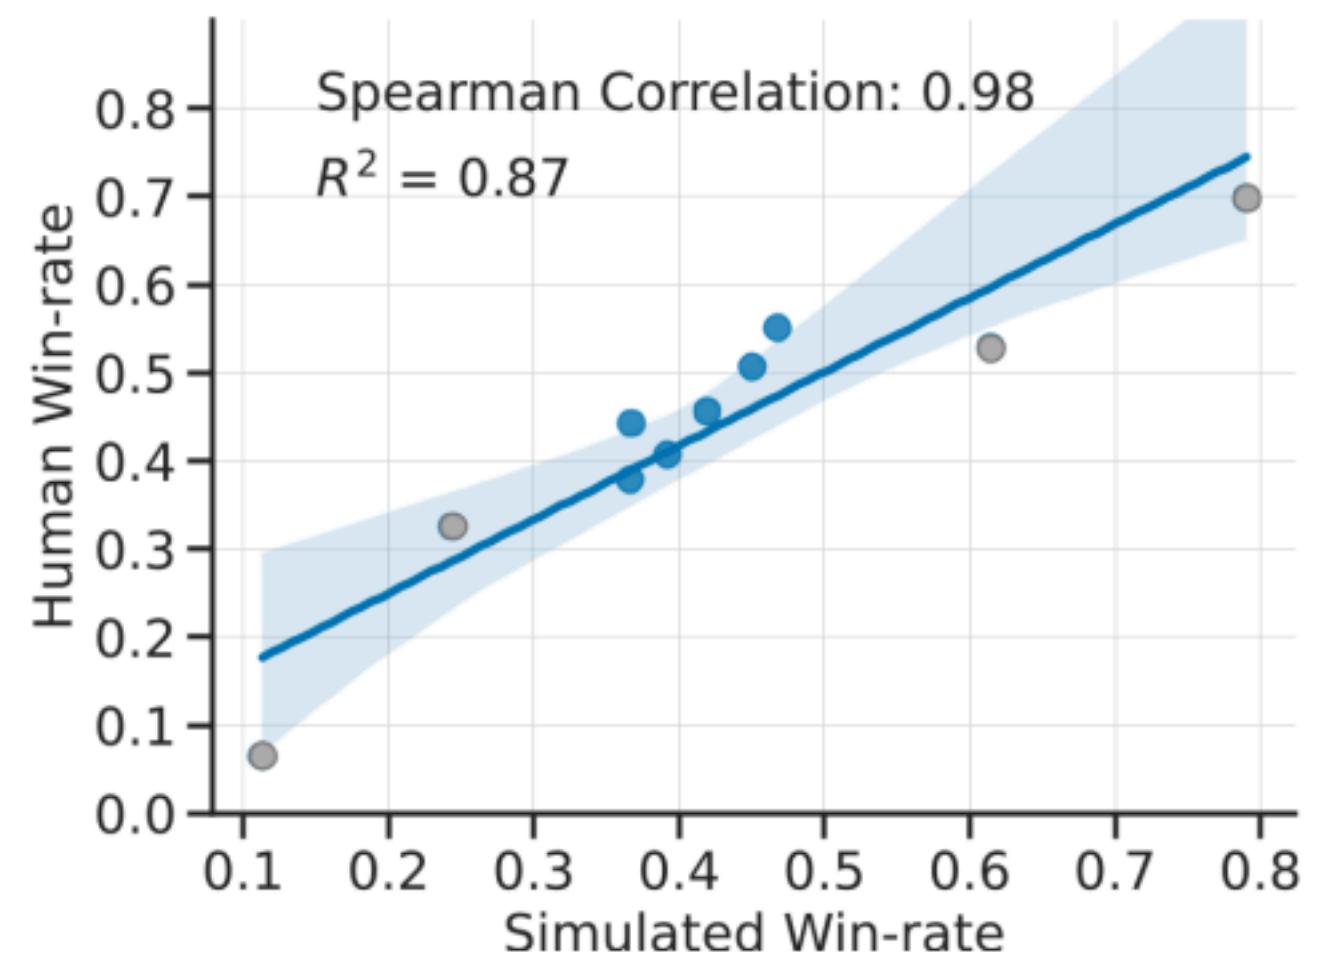


Figure 3: The ranking of methods trained and evaluated in AlpacaFarm matches that of methods trained and evaluated in the human-based pipeline. Each point represents one method M (e.g. PPO). The x-axis shows the simulated evaluation (win-rates measured by $p_{\text{sim}}^{\text{eval}}$) on methods trained in simulation M_{sim} . The y-axis shows human evaluation (win-rates measured by p_{human}) on methods trained with human feedback M_{human} . Gray points show models that we did not train, so their x and y values only differ in the evaluation (simulated vs human). Without those points, we have $R^2 = 0.83$ and a Spearman Correlation of 0.94.



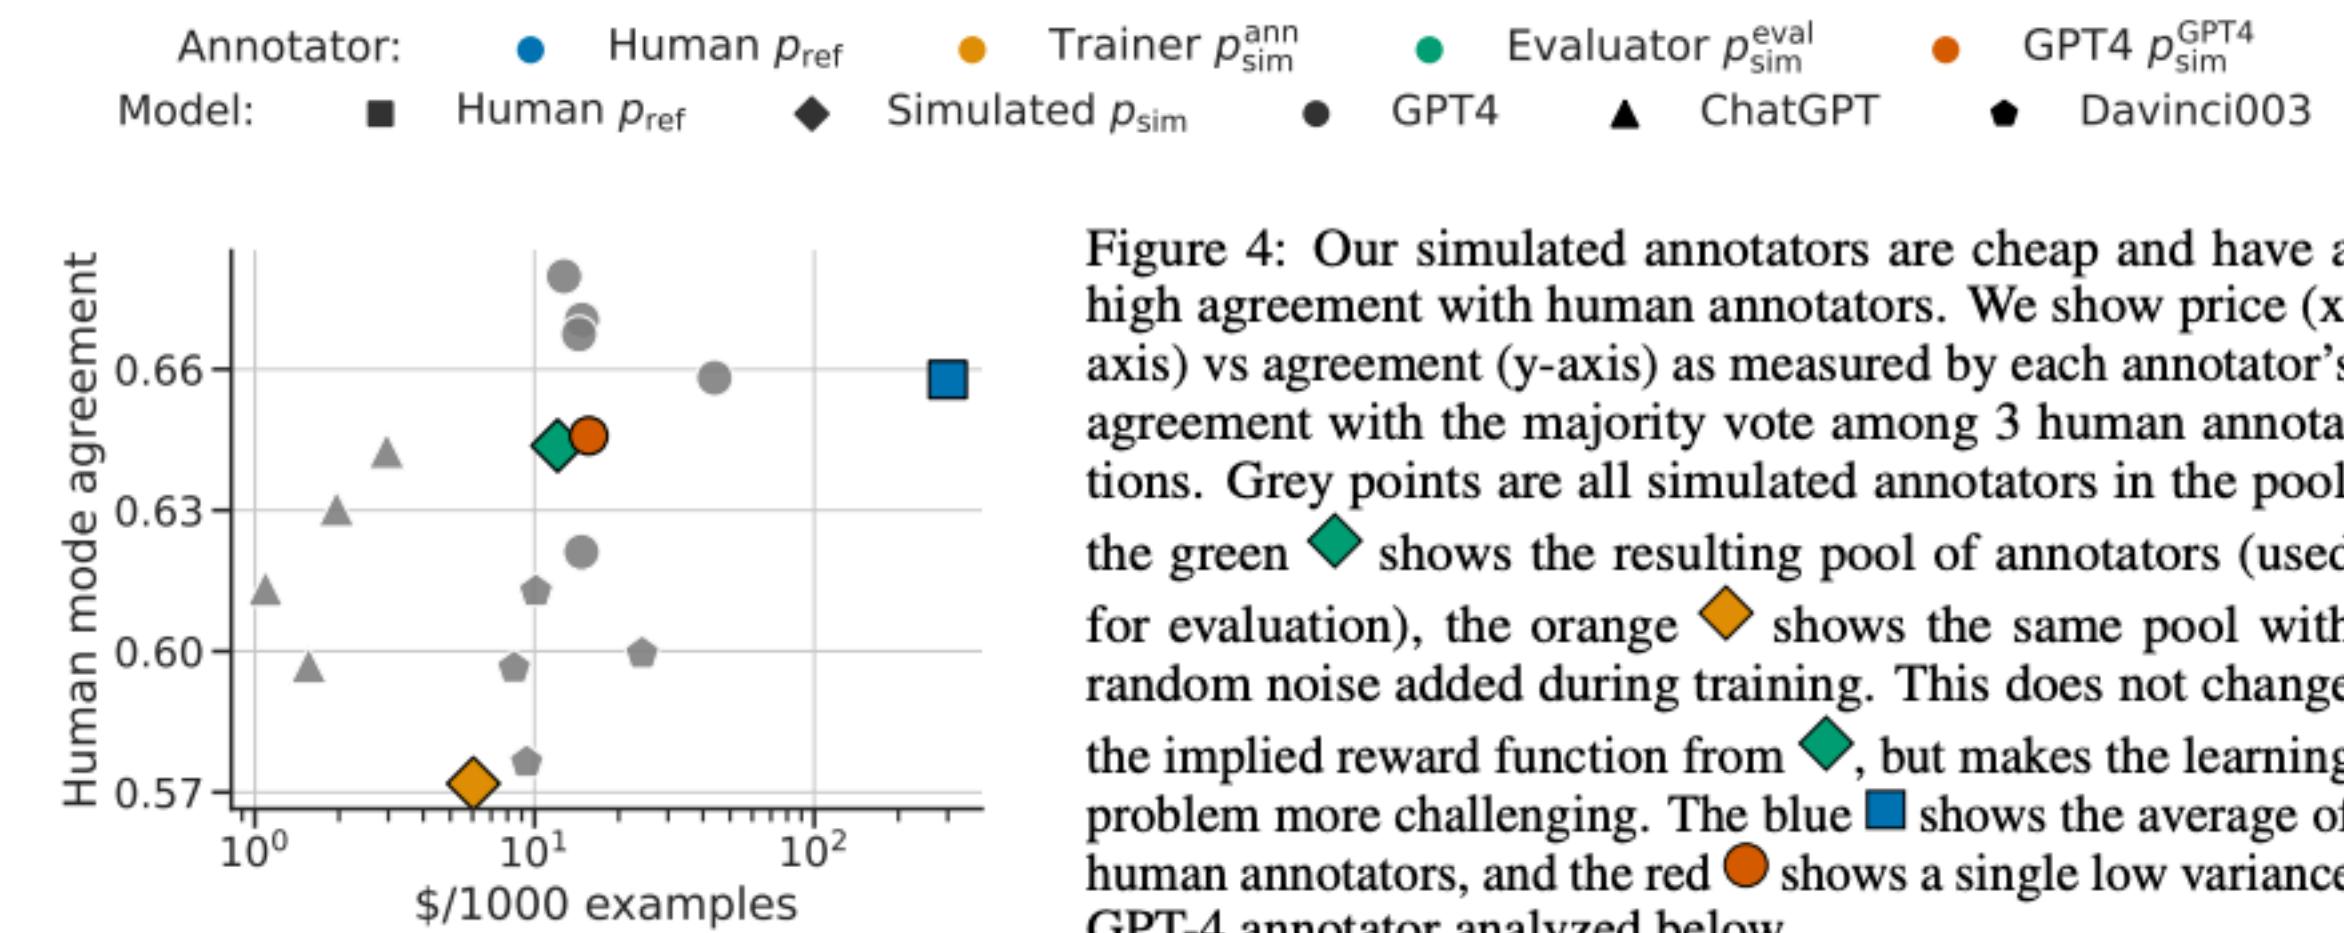


Figure 4: Our simulated annotators are cheap and have a high agreement with human annotators. We show price (x-axis) vs agreement (y-axis) as measured by each annotator's agreement with the majority vote among 3 human annotations. Grey points are all simulated annotators in the pool, the green \diamond shows the resulting pool of annotators (used for evaluation), the orange \diamond shows the same pool with random noise added during training. This does not change the implied reward function from \diamond , but makes the learning problem more challenging. The blue \square shows the average of human annotators, and the red \circ shows a single low variance GPT-4 annotator analyzed below.

Evaluating Systems without References

- Compare human / natural language distributions to model-generated language distributions
- Divergence between these two distributions can be measured by MAUVE

Type I Error:
The time is
the time is
the time is
the time ...

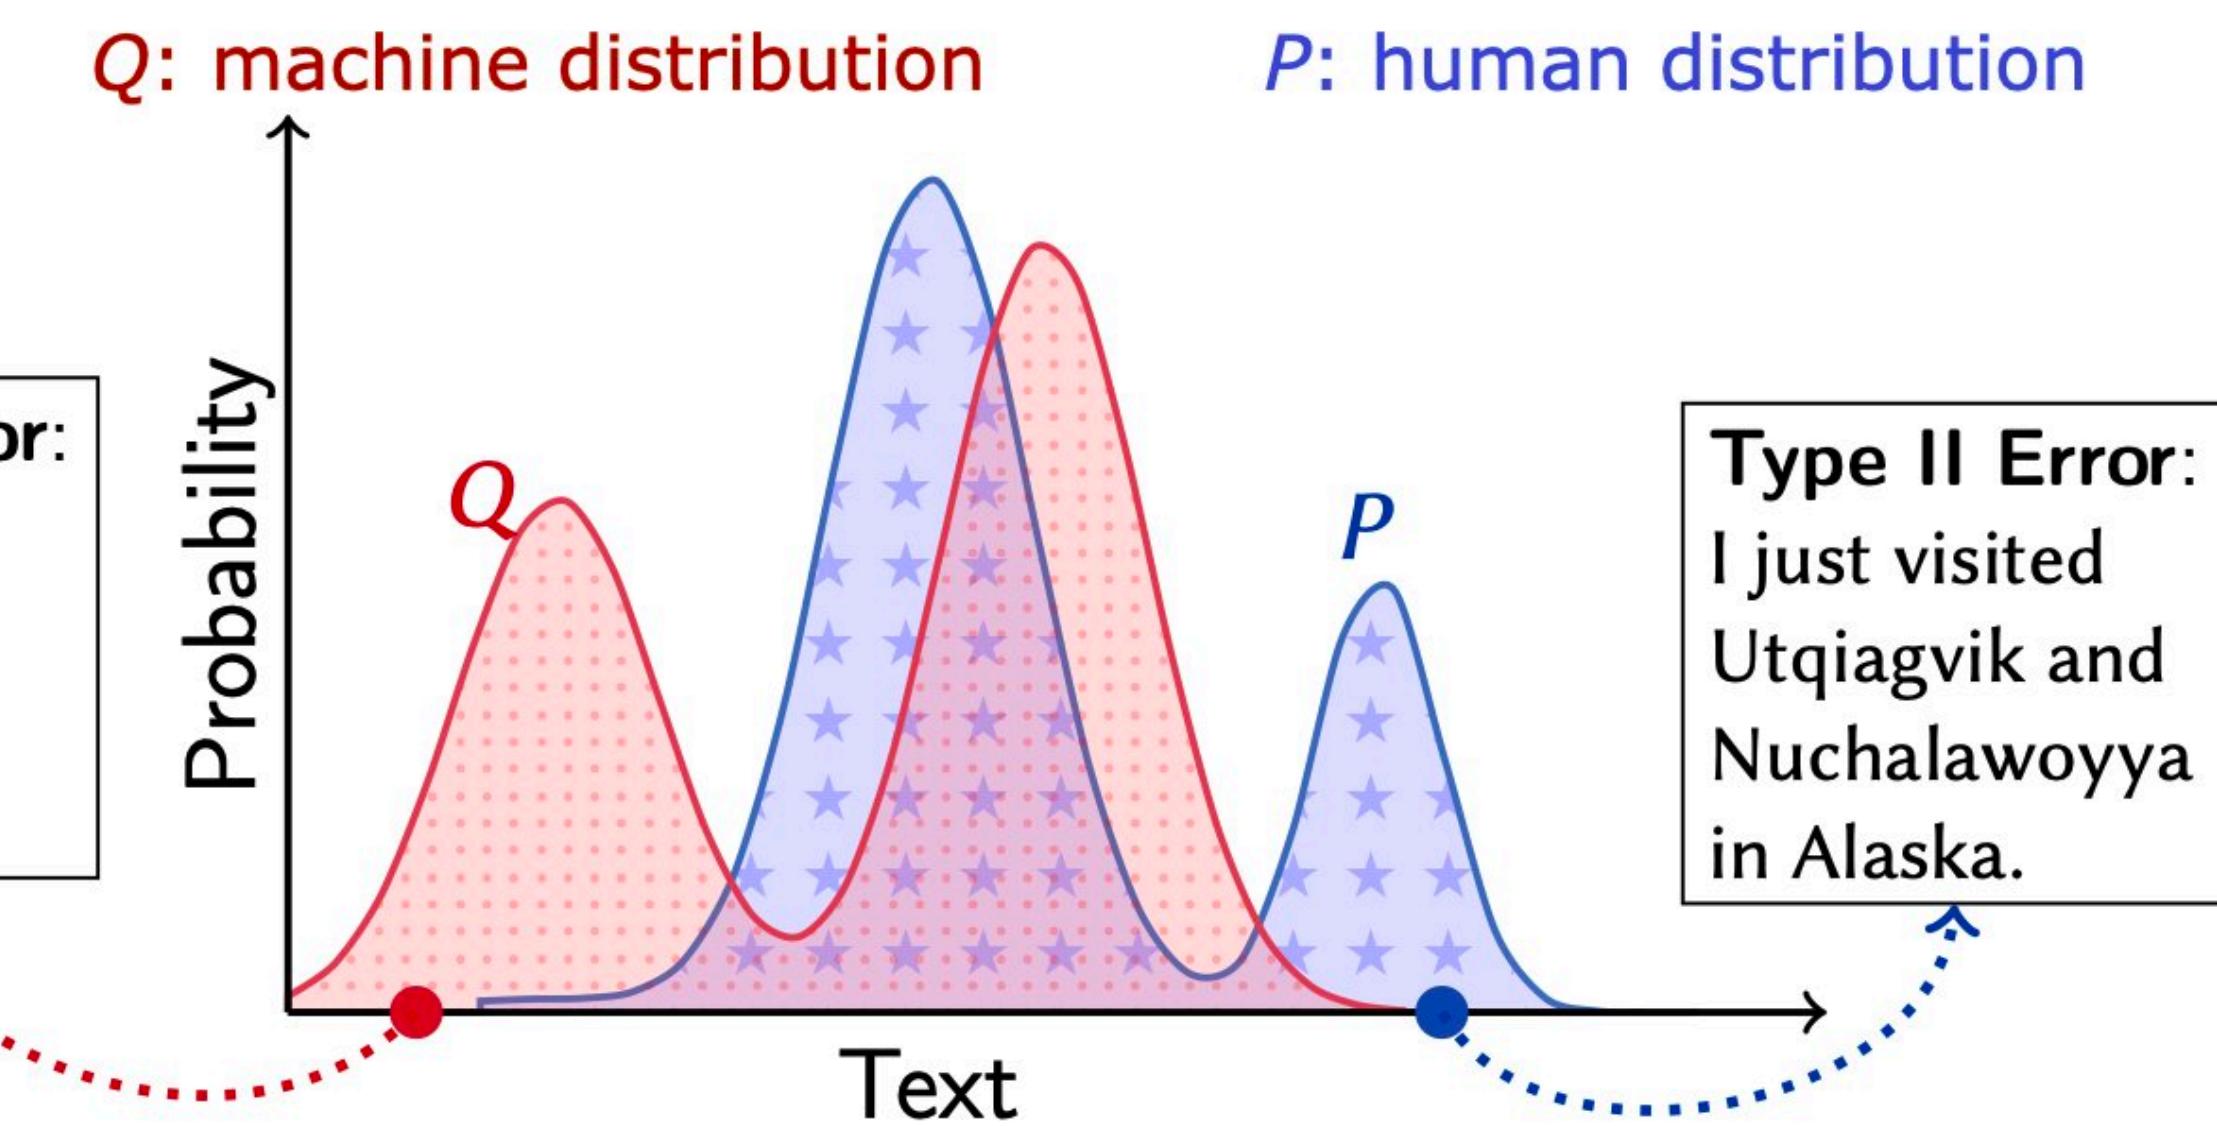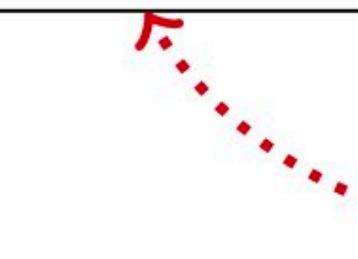

MAUVE: Measuring the Gap Between Neural Text and Human Text using Divergence Frontiers

Krishna Pillutla¹ Swabha Swayamdipta² Rowan Zellers¹ John Thickstun³
Sean Welleck^{1,2} Yejin Choi^{1,2} Zaid Harchaoui⁴

¹Paul G. Allen School of Computer Science & Engineering, University of Washington

²Allen Institute for Artificial Intelligence

³Department of Computer Science, Stanford University

⁴Department of Statistics, University of Washington

Natural Language Generation: Parting Thoughts

- Once trained, language models can be very powerful
 - The power only increases with scale
- So much so that most of our tasks in natural language can be seen as sequence completion tasks
 - Decoding Algorithms thus play a critical role
- How can you make LLMs do tasks (follow instructions)? **Instruction-Tuning and Preference-Tuning**
- **Prompting (or In-Context / Few-Shot Learning)**: the ability to do many tasks with no gradient updates and no / a few examples, by simply:
 - Specifying the right sequence prediction problem
 - You can get interesting zero-shot behavior if you're creative enough with how you specify your task!

Lecture Outline

- Announcements
- Recap: Decoding Algorithms
- Evaluating Generated Language
- LLMs
 - Pretraining
 - Post-training with Supervised Finetuning:
 - Instruction Tuning
 - Interacting with LLMs: Prompting
 - Post-training with Alignment with Human Feedback:
 - Preference Tuning: RLHF [Next Class]

Large Language Models

What are Large Language Models?

- Models with many, many, parameters
 - Deeper layers. The largest T5 model had 11B parameters. GPT-3 has 175B parameters.
 - More context. GPT-2 has a context length of 1024 tokens, GPT-4 and Llama have 8192!
 - LLM are generally trained by filling the full context window with text. If documents are shorter than this, multiple documents are packed into the window with a special end-of-text token between them.
- Models trained on many, many tokens
 - Training data size is measured in # tokens
 - Batch size of the largest GPT-3 model is 3.2M tokens


| OpenAI model's version | GPT-3 (ada, babbage, curie, davinci) | GPT-3.5 (gpt-3.5-turbo, gpt-3.5-turbo-0301, text-davinci-003, text-davinci-002)* | GPT-4-8K |
|---|---|---|----------|
| Context length (max request) | 2,049 | 4,096 | 8,192 |
| Number of English words | ~1,500 | ~3,000 | ~6,000 |
| Number of single-spaced pages of English text | 3 | 6 | 12 |

Source: [Neoteric](#)

| Model | Size (# Parameters) | Training Tokens |
|--|---------------------|-----------------|
| LaMDA (Thoppilan et al., 2022) | 137 Billion | 168 Billion |
| GPT-3 (Brown et al., 2020) | 175 Billion | 300 Billion |
| Jurassic (Lieber et al., 2021) | 178 Billion | 300 Billion |
| Gopher (Rae et al., 2021) | 280 Billion | 300 Billion |
| MT-NLG 530B (Smith et al., 2022) | 530 Billion | 270 Billion |
| <i>Chinchilla</i> | 70 Billion | 1.4 Trillion |

The Scaling “Laws” of LLMs

- Predictive rules of model performance, given parameter size, data size, computation
- The loss of an LLM scales as a power-law with each of these three properties of model training
- Other architectural details such as network width or depth have minimal effects within a wide range
- Determines the optimal allocation of a fixed compute budget
 - For instance, it can help us train very large models on a relatively modest amount of data and stop significantly before convergence
 - Or smaller models on larger data (e.g. Chinchilla LM)

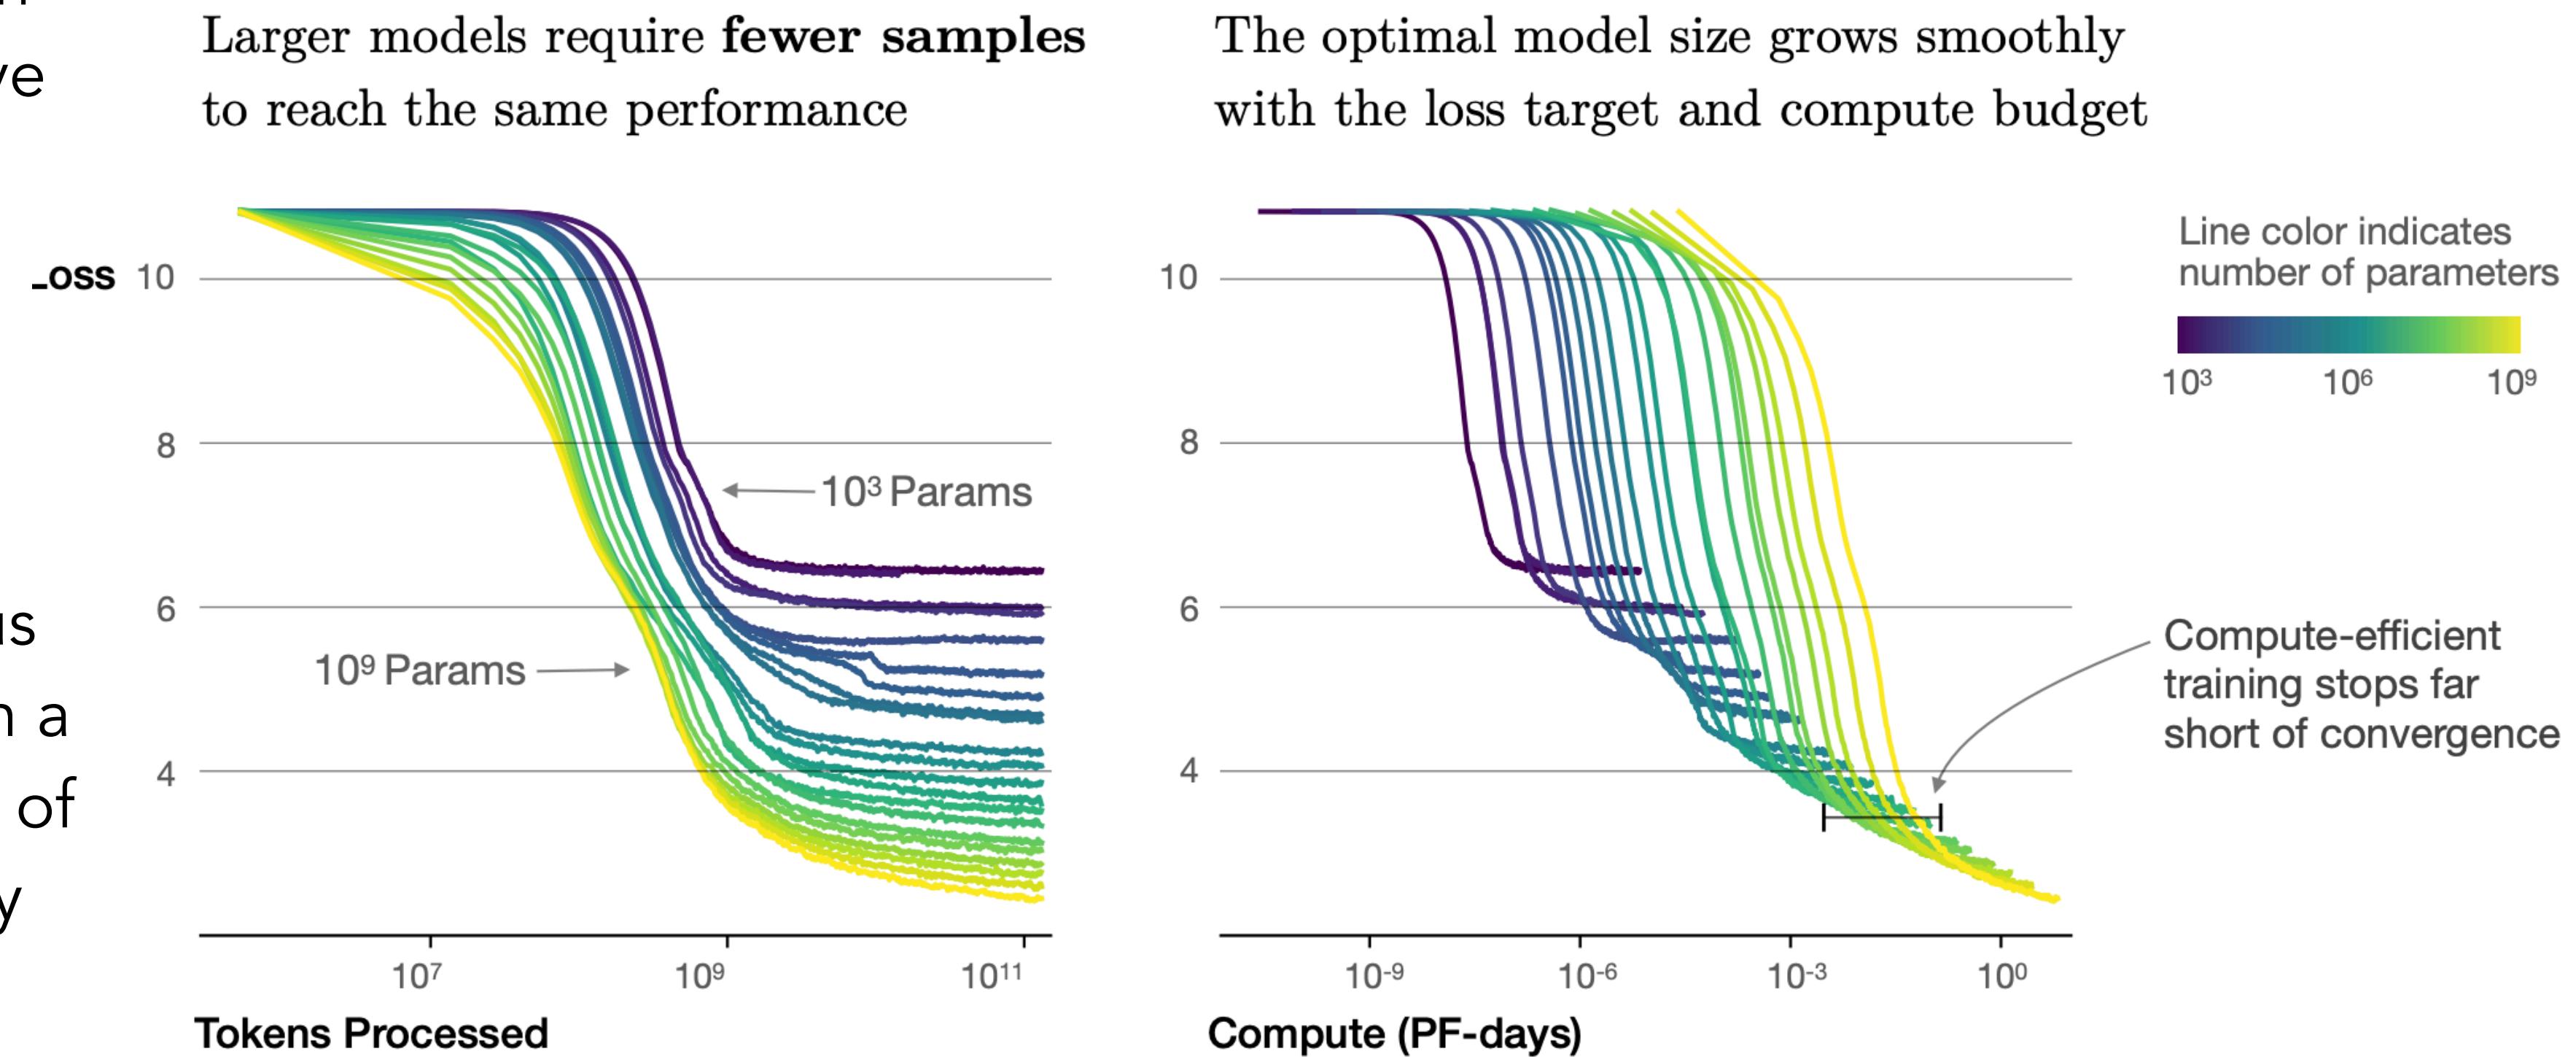


Kaplan et al., 2020 <https://arxiv.org/abs/2001.08361>

Training LLMs

A significant, yet small part of the LM training phase
(Next Class)

Shoggot; slide credit: Justin Cho

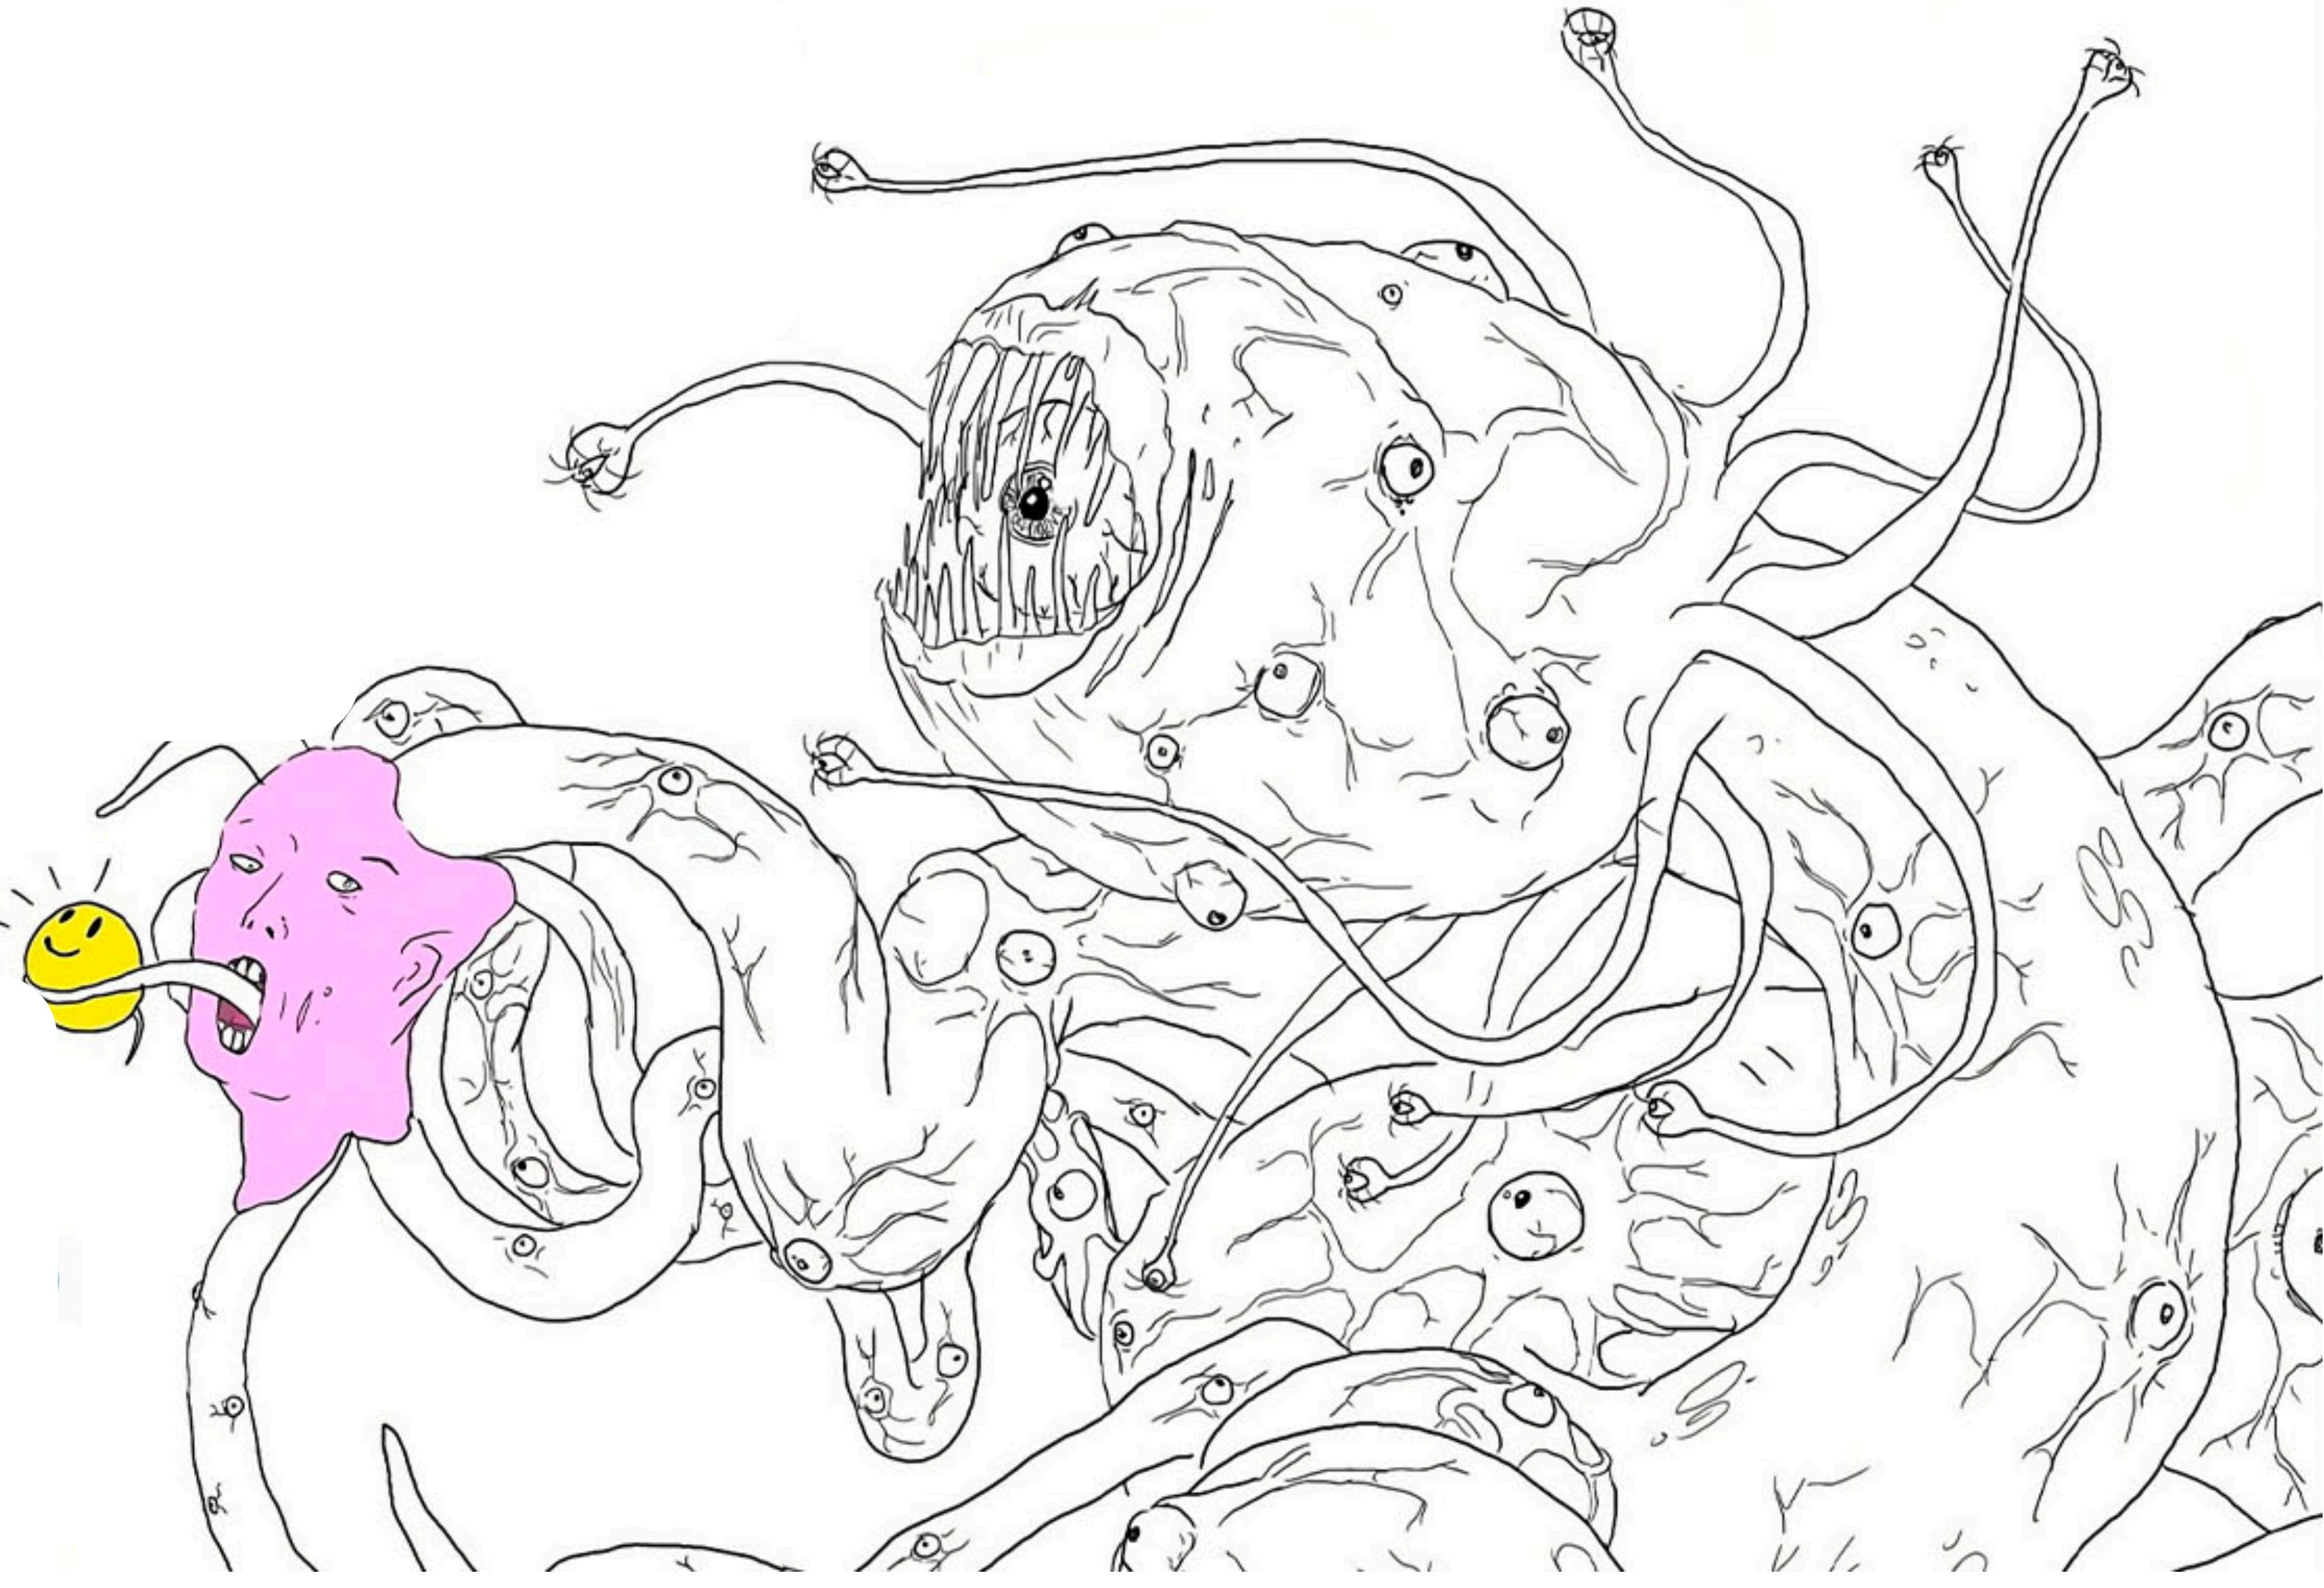


LLMs: Modern Training + Inference Recipe


- Training Recipe:
 - Stage 1: Pre-training on large corpus of text
 - This is called the base language model
 - Continued Pre-training for domain adaptation (optional)
 - Stage 2: Post-training
 - Instruction Tuning (Supervised Finetuning)
 - Stage 3: Post-training and Alignment
 - Reinforcement Learning with Human Feedback
 - Train a supervised classifier (reward model) on human demonstrations to provide feedback to LM
 - Supervised fine-tuning the LM with reinforcement learning to maximize rewards given by reward model
- Inference: Prompting with Instructions and Demonstrations (also called examples, shots)

Pre-training and Fine-tuning (Post-training)

- Slightly different meaning than before
- Pre-training: Decoder-only models, standard next token prediction
- Fine-tuning: Supervised
 - **Instruction-Tuning:** Supervision is not necessarily via labels, but sequence pairs. Labels in standard NLP benchmarks can be converted into sequence pairs
 - **Preference-Tuning:** Collects human judgments / preferences as rewards
 - These steps are often called **post-training**

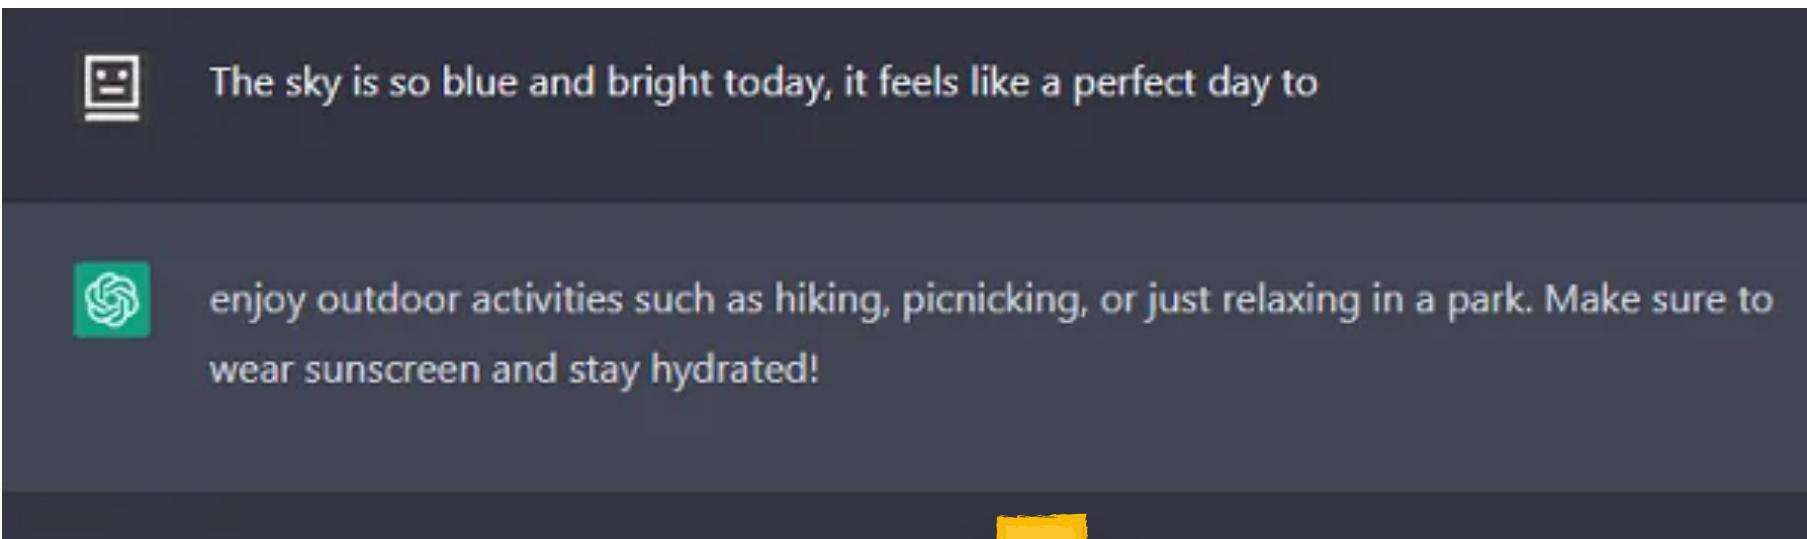


Post-training converts next-word completion models into **world models (agents, assistants)** with many capabilities!

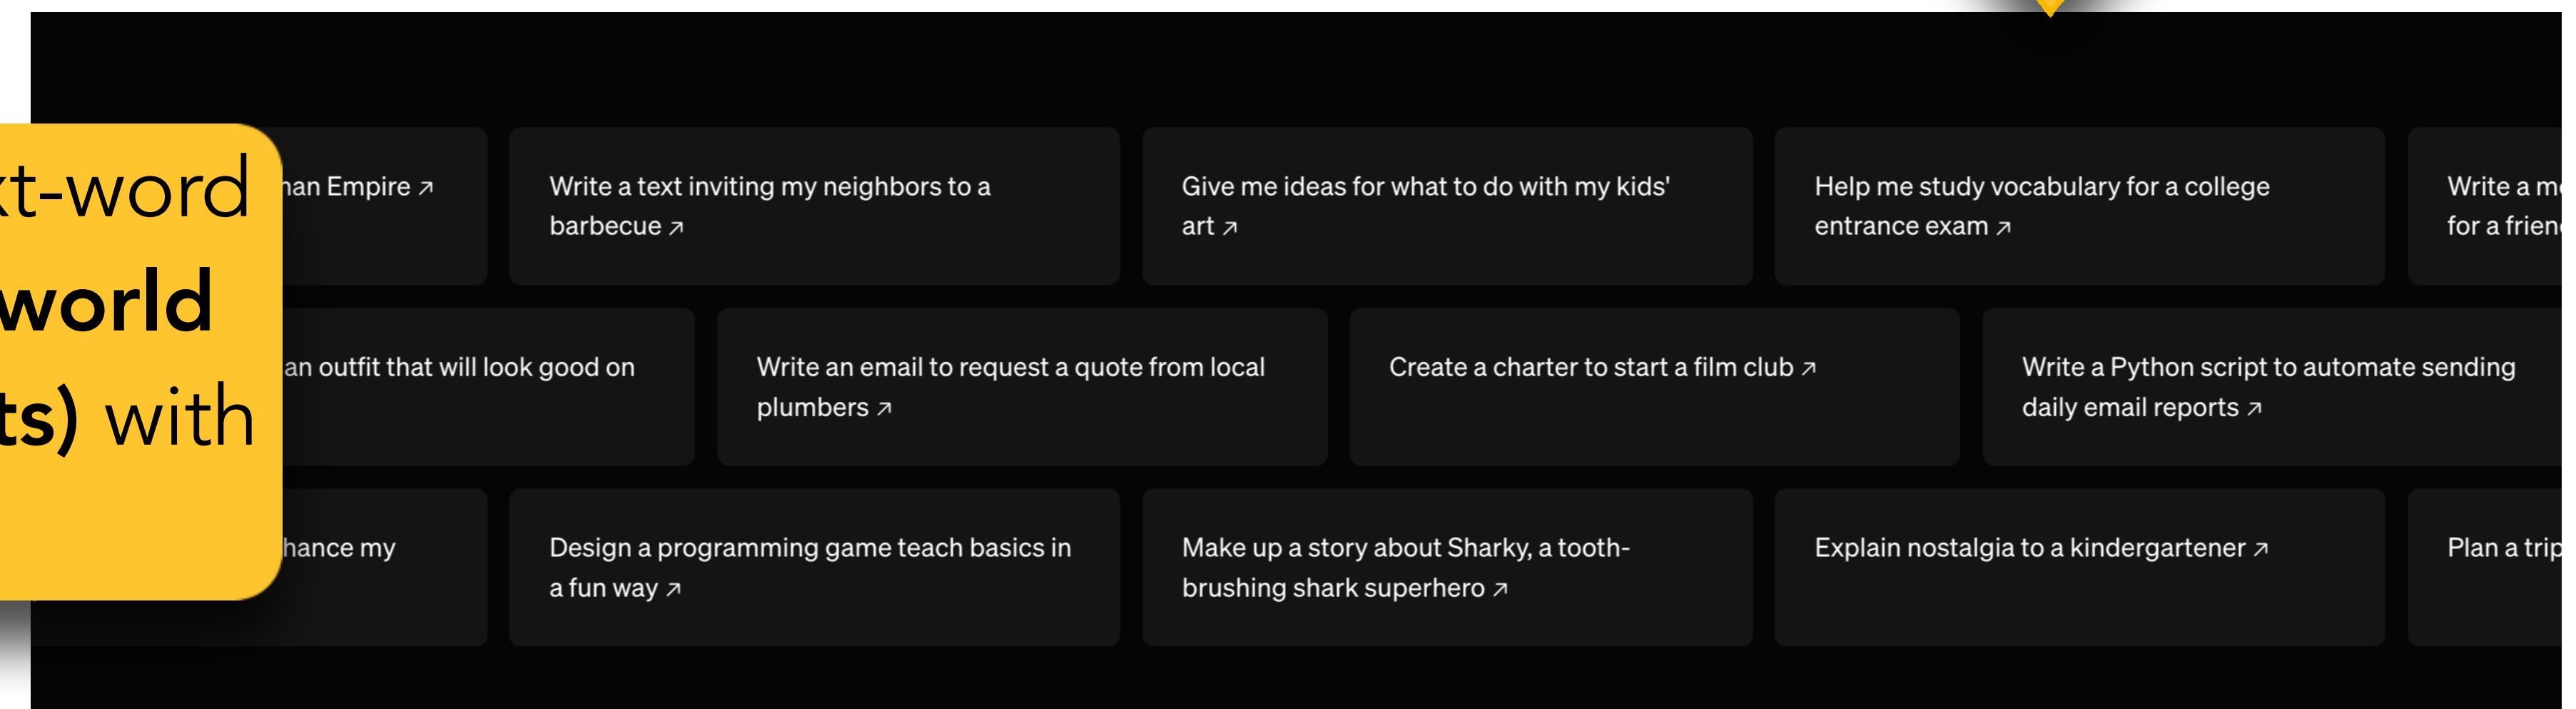

Training Data for LLMs

- Pre- and post-training requires different kinds of data
- Pre-training needs a lot of raw text
 - Crawled from the Web: Natural Solution
 - But not all data crawled from the web is good for LM training
 - Needs to be filtered in various ways (deduplicated, removing non-natural language like code, sentences with offensive words from a blocklist).
 - Quality Filters! (Later lecture)
- Post-training / Fine-tuning
 - Instruction Tuning Data: Repurposed NLP / ML benchmarks
 - Preference Data for RLHF: Often human labels
 - Not easy to produce...

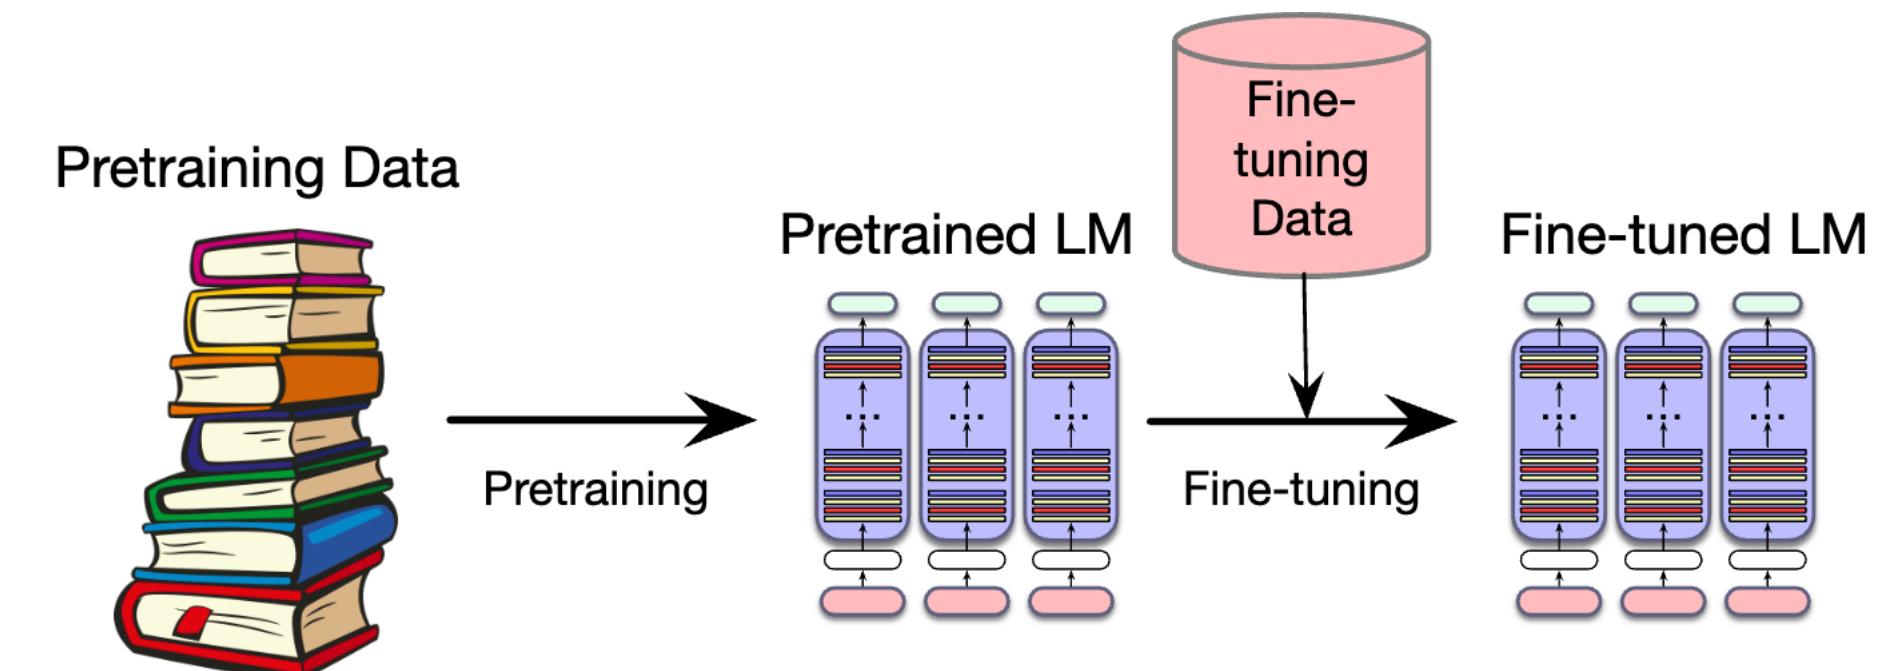

Pre-training Data

- Language models are trained on “raw text”
- To be highly capable (e.g., have linguistic and world knowledge), this text should span a **broad** range of domains, genres, languages, etc.
- A natural place (but not the only place) to look for such text is the **web**
 - Google search index is 100 petabytes; the actual web is likely even larger
 - **Private datasets** owned by big companies are even larger! [WalMart](#) generates 2.5 petabytes of data each hour!
- **Common Crawl** is a nonprofit organization that crawls the web and provides snapshots that are free to the public
 - Standard source of data to train many models such as T5, GPT-3, etc.
 - The April 2021 snapshot of [Common Crawl](#) has 320 TB
- The Colossal Clean Crawled Corpus ([C4](#)) is a larger was created to train the T5 model — 806 GB / 156 billion tokens



The Pile and DOLMA

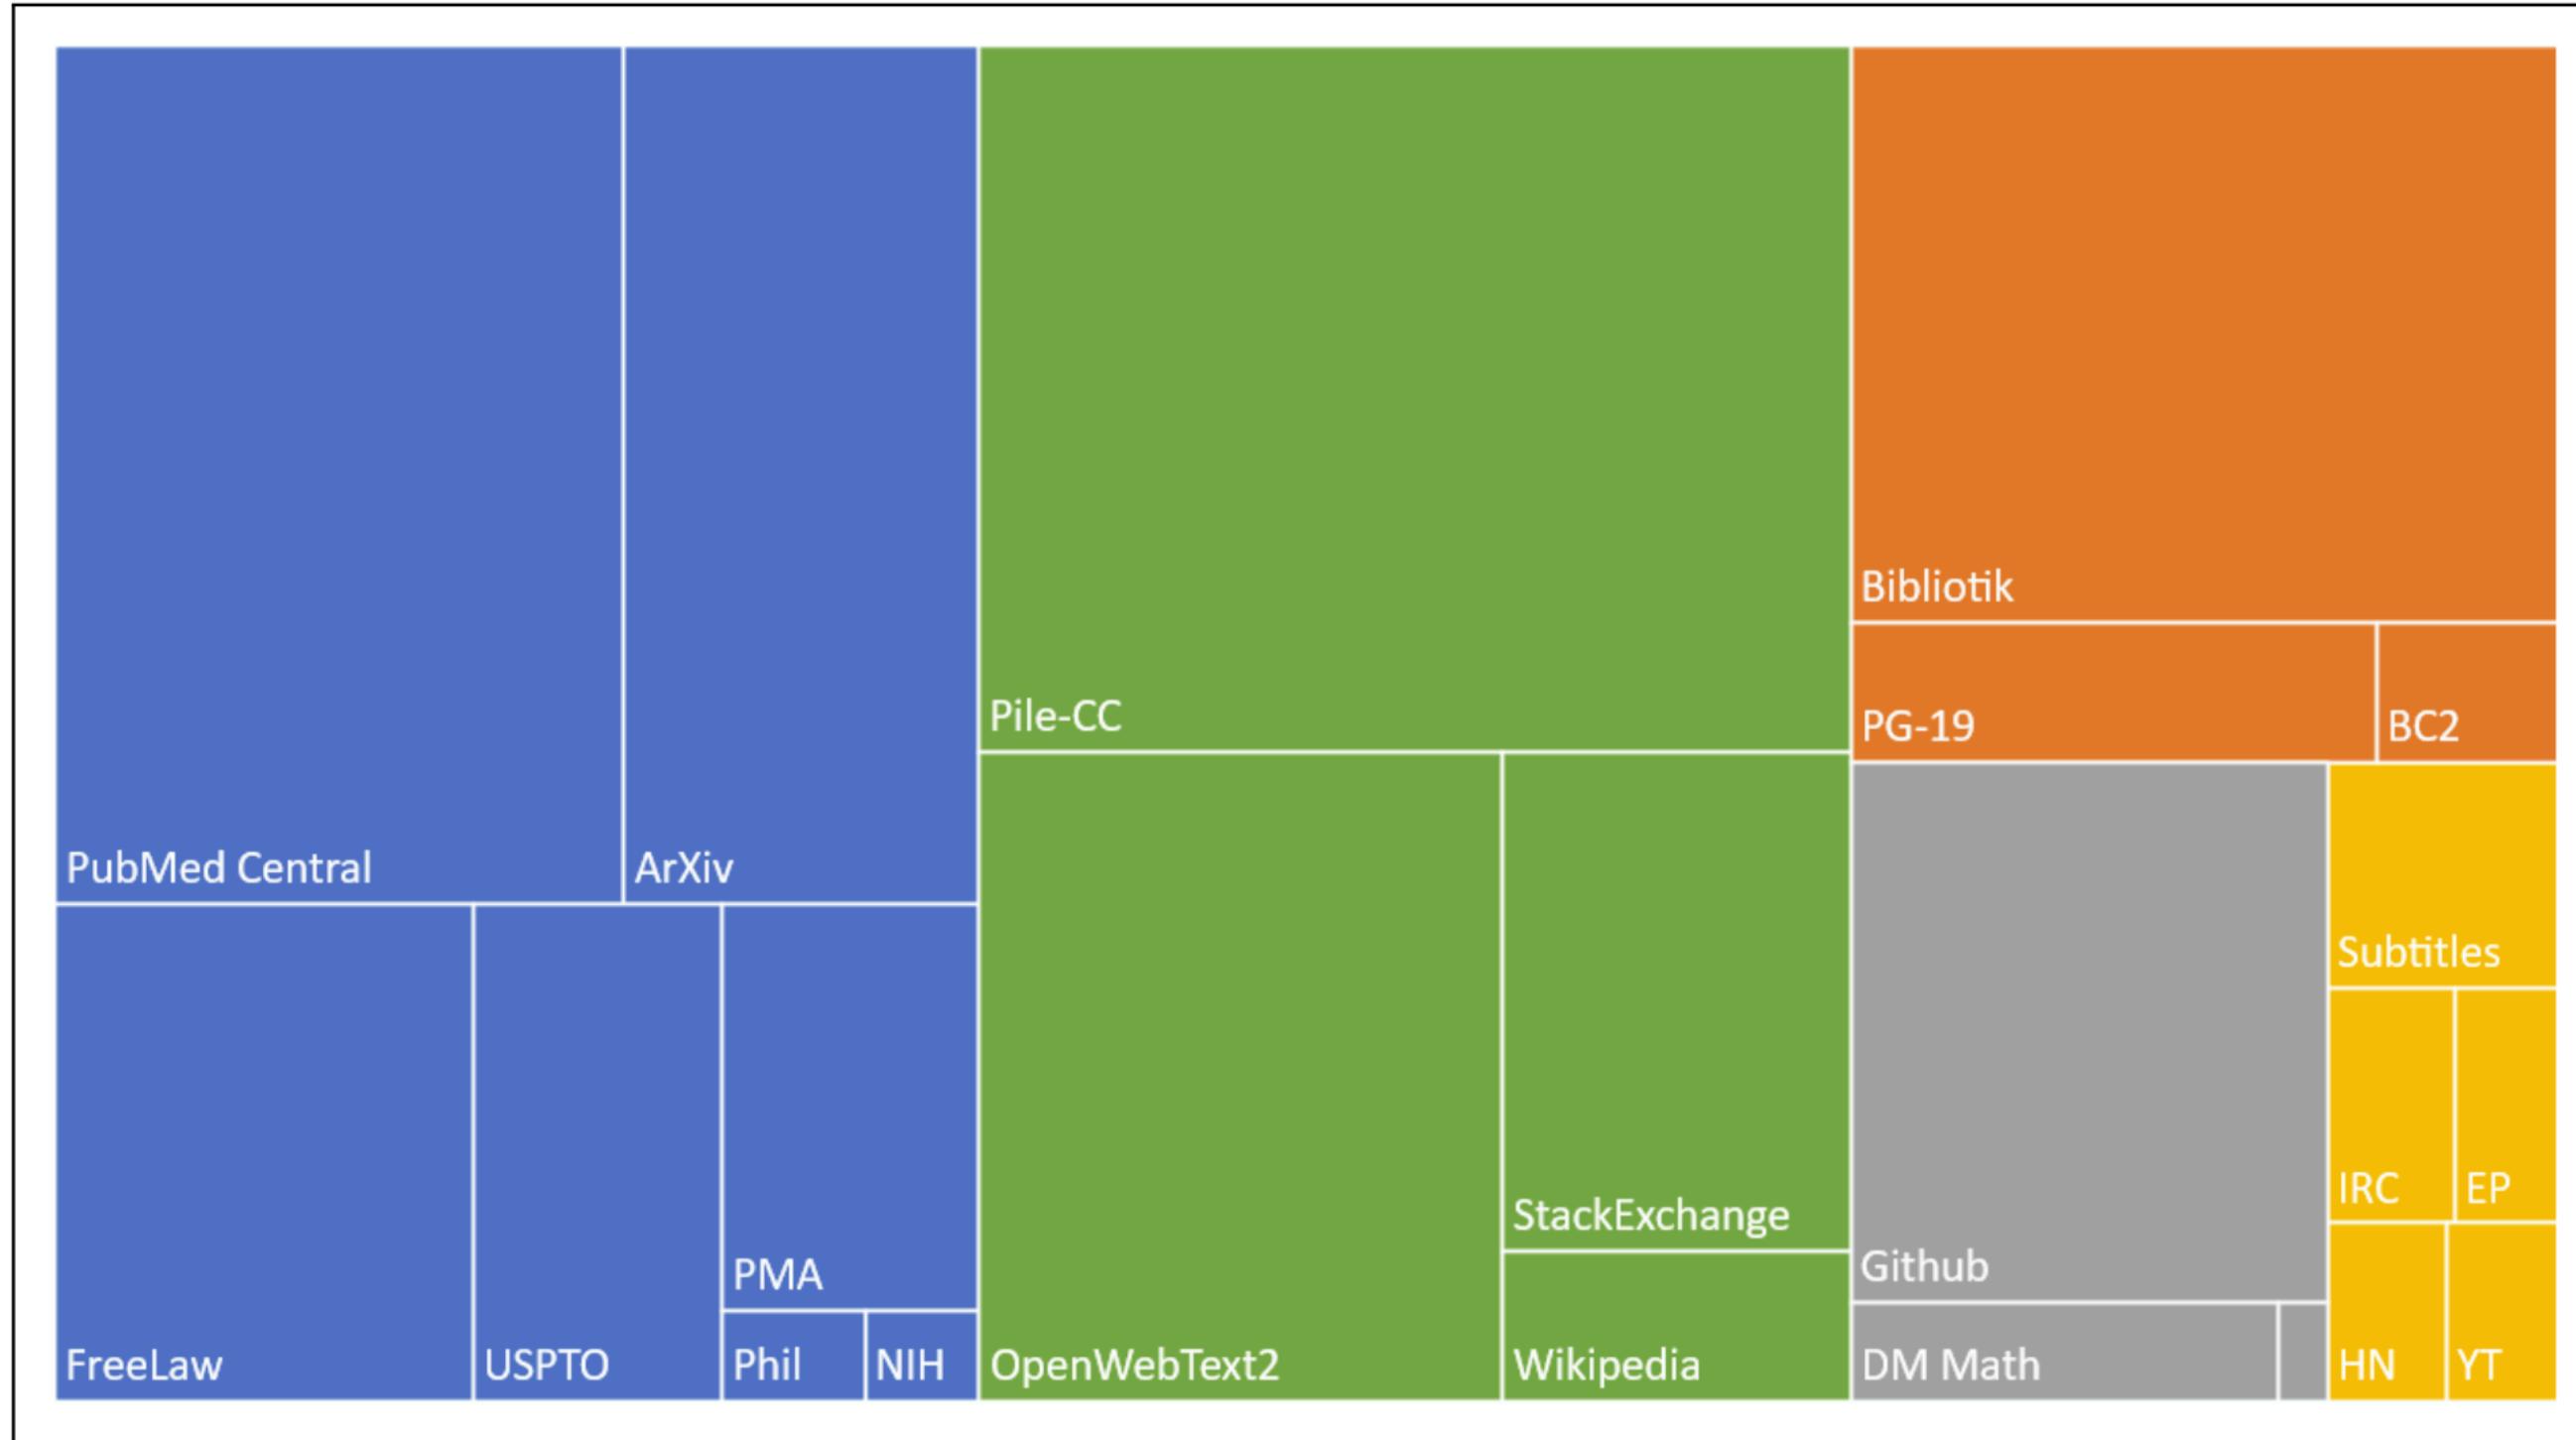


Figure 10.5 The Pile corpus, showing the size of different components, color coded as **academic** (articles from PubMed and ArXiv, patents from the USPTO; **internet** (webtext including a subset of the common crawl as well as Wikipedia), **prose** (a large corpus of books), **dialogue** (including movie subtitles and chat data), and misc.. Figure from Gao et al. (2020).

The Pile: 825 GB English text corpus containing a large amount of text scraped from the web, books and Wikipedia


Dolma

| Source | Doc Type | UTF-8 bytes (GB) | Documents (millions) | Unicode words (billions) | Llama tokens (billions) |
|----------------------|----------------|------------------|----------------------|--------------------------|-------------------------|
| Common Crawl | 🌐 web pages | 9,812 | 3,734 | 1,928 | 2,479 |
| GitHub | ⚡ code | 1,043 | 210 | 260 | 411 |
| Reddit | 💬 social media | 339 | 377 | 72 | 89 |
| Semantic Scholar | 🎓 papers | 268 | 38.8 | 50 | 70 |
| Project Gutenberg | 📖 books | 20.4 | 0.056 | 4.0 | 6.0 |
| Wikipedia, Wikibooks | 📘 encyclopedic | 16.2 | 6.2 | 3.7 | 4.3 |
| Total | | 11,519 | 4,367 | 2,318 | 3,059 |

Dolma is a larger open corpus of English, created with public tools, containing three trillion tokens, which similarly consists of web text, academic papers, code, books, encyclopedic materials, and social media (Soldaini et al., 2024)

Continued Pre-training

- LLMs are general domain. But we may need domain-specific LLMs...
 - For example, we might want a language model that's specialized to legal or medical text
- In such cases, we can simply continue training the model on relevant data from the new domain or language (Gururangan et al., 2020)
 - Next word prediction objective
 - Works better when starting from a pretrained general-domain language model, as opposed to training from scratch
 - It is even possible to do targeted data selection for obtaining domain-specific pretraining data (e.g. using k-means)

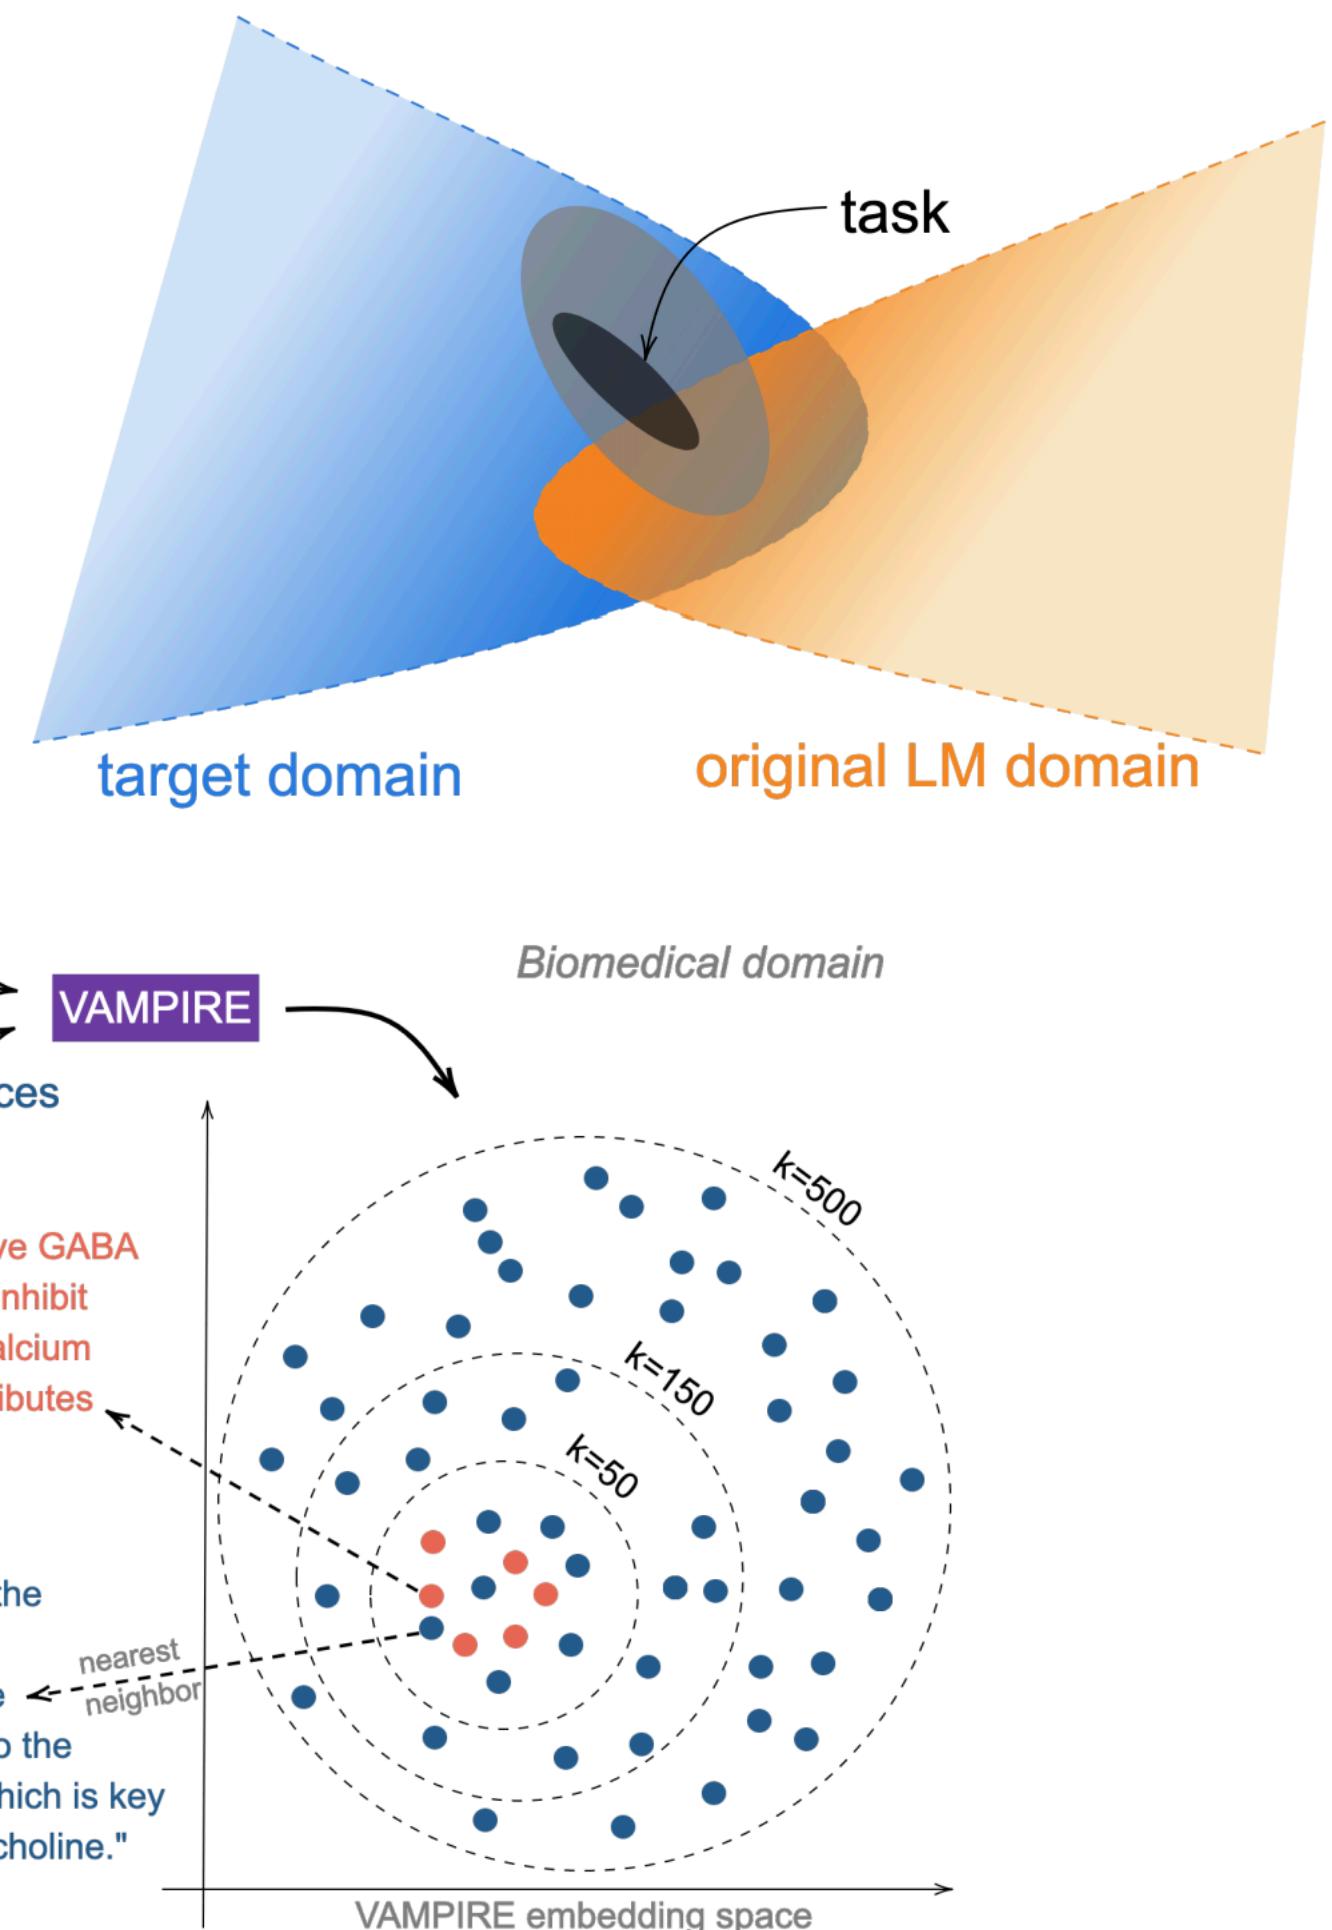

LLMs as Mixtures of Experts

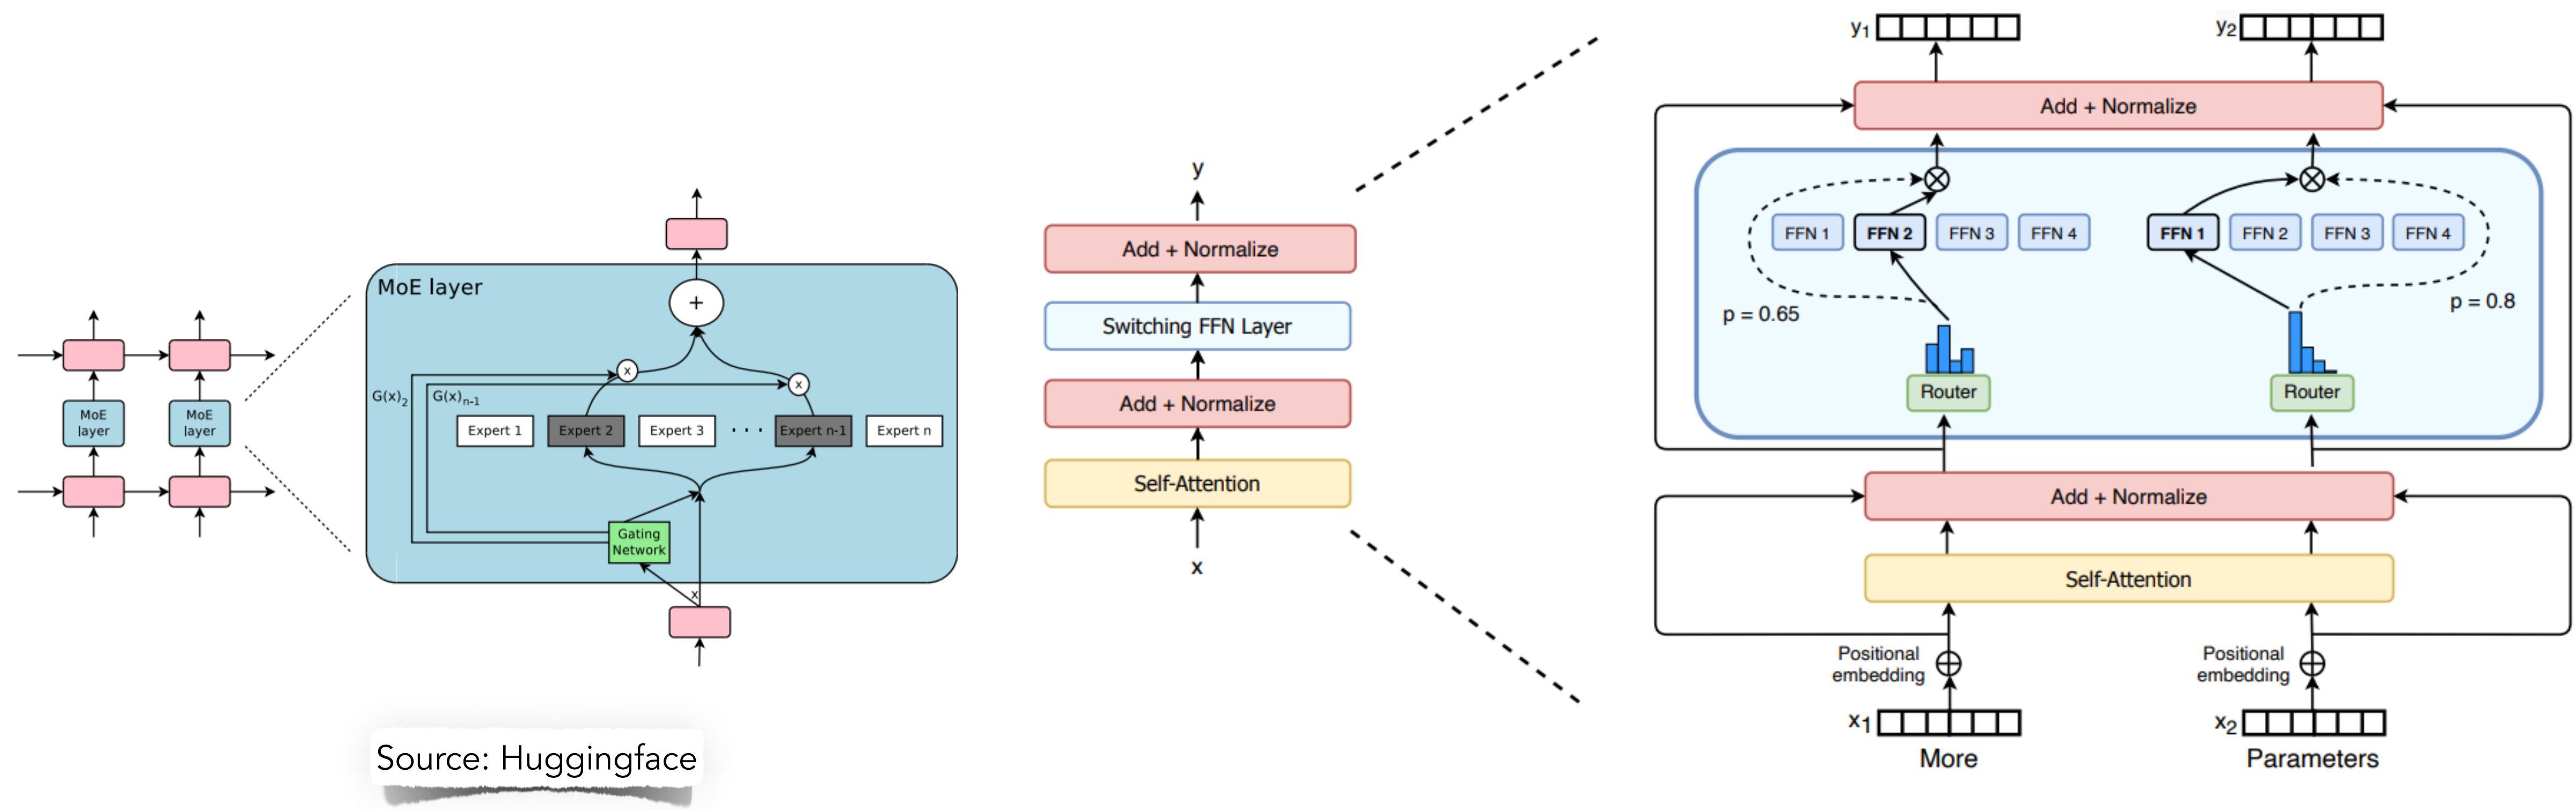


Figure 2: Illustration of a Switch Transformer encoder block. We replace the dense feed forward network (FFN) layer present in the Transformer with a sparse Switch FFN layer (light blue). The layer operates independently on the tokens in the sequence. We diagram two tokens ($x_1 = \text{"More"}$ and $x_2 = \text{"Parameters"}$ below) being routed (solid lines) across four FFN experts, where the router independently routes each token. The switch FFN layer returns the output of the selected FFN multiplied by the router gate value (dotted-line).

LLM Inference: KV Cache

- Matrices / tensors for efficient computation cannot be applied during inference? Why?
 - At inference time, we iteratively generate the next tokens one at a time
 - Hence, we use key and value (and query) vectors
- KV Cache achieves inference-time speedup
- Instead of recomputing the key and value vectors for all the prior tokens $x_{<i}$, whenever we compute the key and value vectors we store them in memory in the KV cache, and then we can retrieve them from the cache as needed

$$\begin{aligned}
 XQ & \quad K^\top X^\top = XQK^\top X^\top \in \mathbb{R}^{n \times n} \\
 & \qquad \qquad \qquad \text{All pairs of attention scores!} \\
 & \text{softmax} \left(XQK^\top X^\top \right) XV = \text{output} \in \mathbb{R}^{n \times d}
 \end{aligned}$$