


Swaham Pitambar Patra

Modules & Packages :

Task 1:

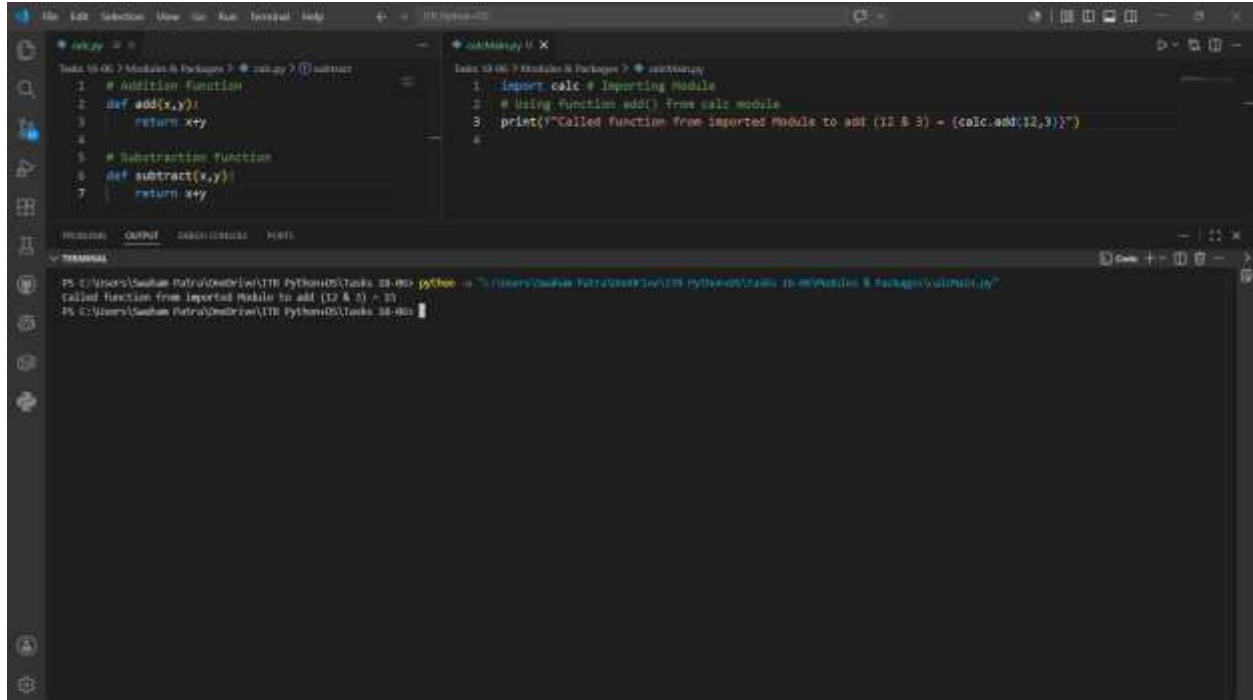


```
Task 10 06 > Modules & Packages > calc.py > calc.py
1 # Addition Function
2 def add(x,y):
3     return x+y
4
5 # Subtraction Function
6 def subtract(x,y):
7     return x-y

Task 10 06 > Modules & Packages > subModule.py
1 import calc # Importing Module
2 # Using function add() from calc module
3 print(f"Called function from imported Module to add (12 & 3) = {calc.add(12,3)}")
4

Terminal
PS C:\Users\Swaham Patra\OneDrive\IT\PythonDS\Tasks 10-06> python -i "%UserProfile%\Swaham Patra\OneDrive\IT\PythonDS\Tasks 10-06\Modules & Packages\subModule.py"
called function from imported Module to add (12 & 3) = 15
PS C:\Users\Swaham Patra\OneDrive\IT\PythonDS\Tasks 10-06>
```

Task 2:

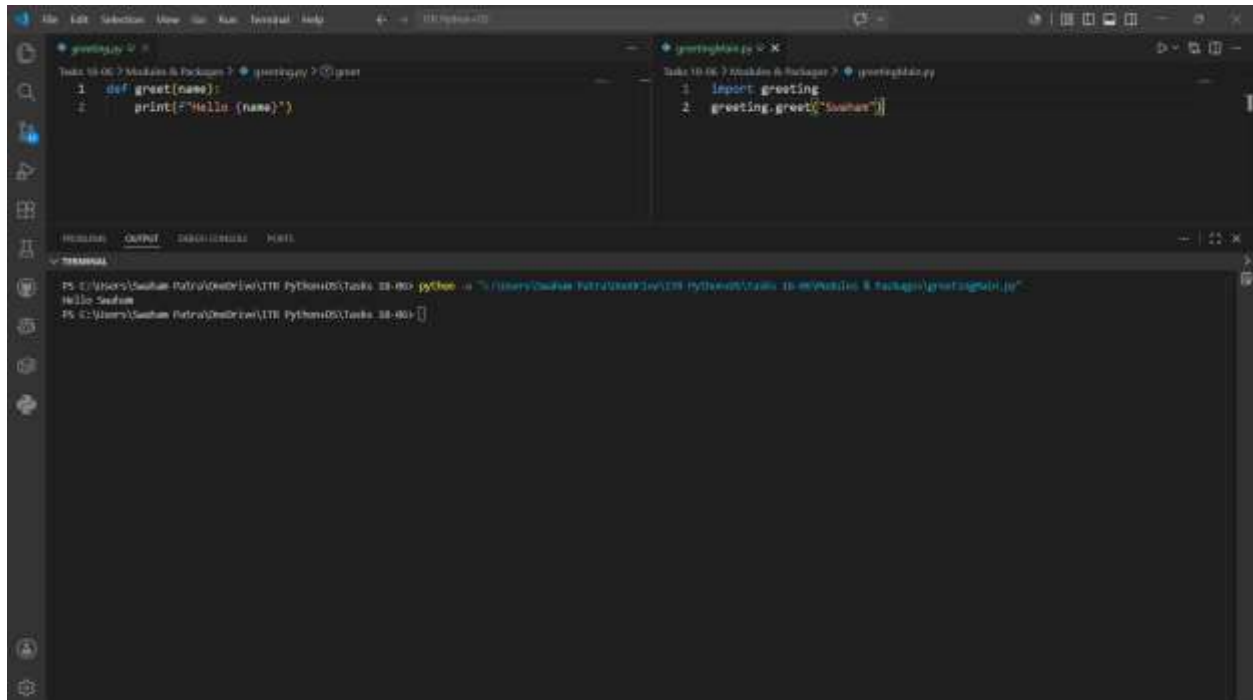


```
Task 10 06 > Modules & Packages > greet.py > greet.py
1 def greet(name):
2     print(f"Hello {name}")

Task 10 06 > Modules & Packages > greetModule.py
1 import greet
2 greet.greet("Swaham")

Terminal
PS C:\Users\Swaham Patra\OneDrive\IT\PythonDS\Tasks 10-06> python -i "%UserProfile%\Swaham Patra\OneDrive\IT\PythonDS\Tasks 10-06\Modules & Packages\greetModule.py"
Hello Swaham
PS C:\Users\Swaham Patra\OneDrive\IT\PythonDS\Tasks 10-06>
```

Task 3:

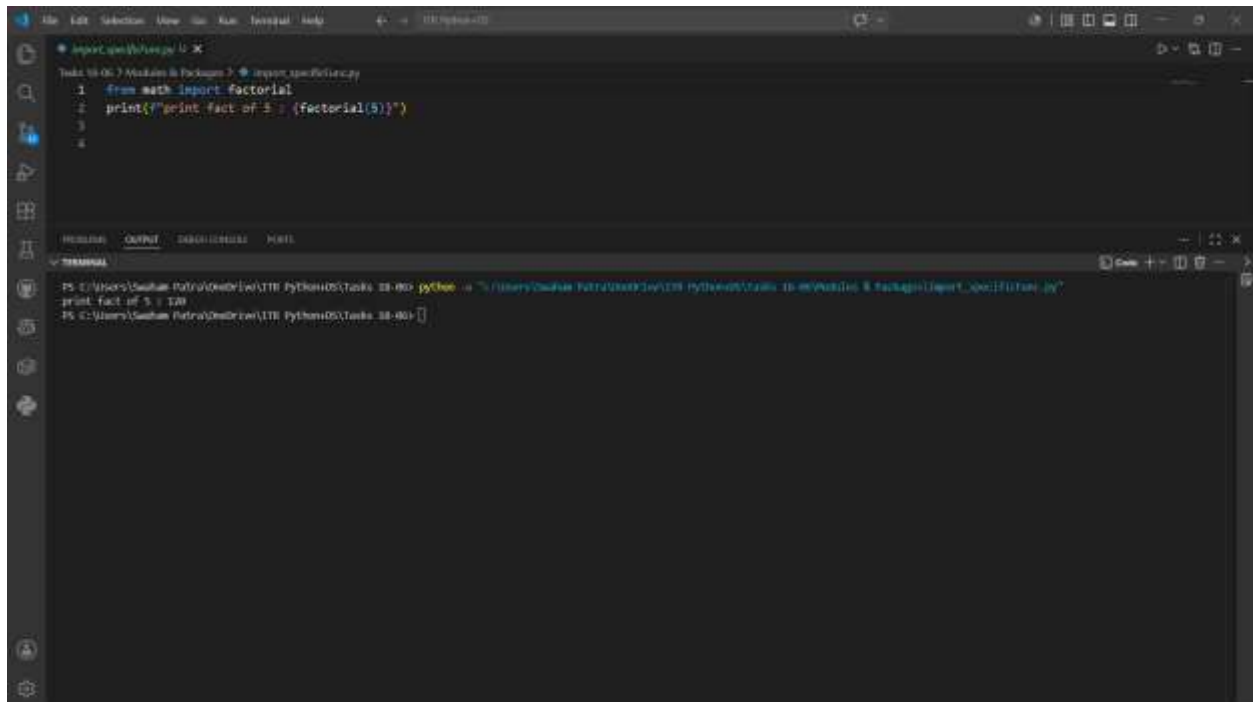


The screenshot shows an IDE with a Python script in the editor and a terminal window below it. The script is named `import_specific.py` and contains the following code:

```
1 from math import factorial
2 print(f"print fact of 5 : {factorial(5)}")
3
4
```

The terminal window shows the command `python -u %/Users/Seaham/Petro/Dev/IDE/Python/Task3-26/Module3 & Task3/import_specific.py` being executed, resulting in the output:

```
print fact of 5 : 120
```

Task 4:

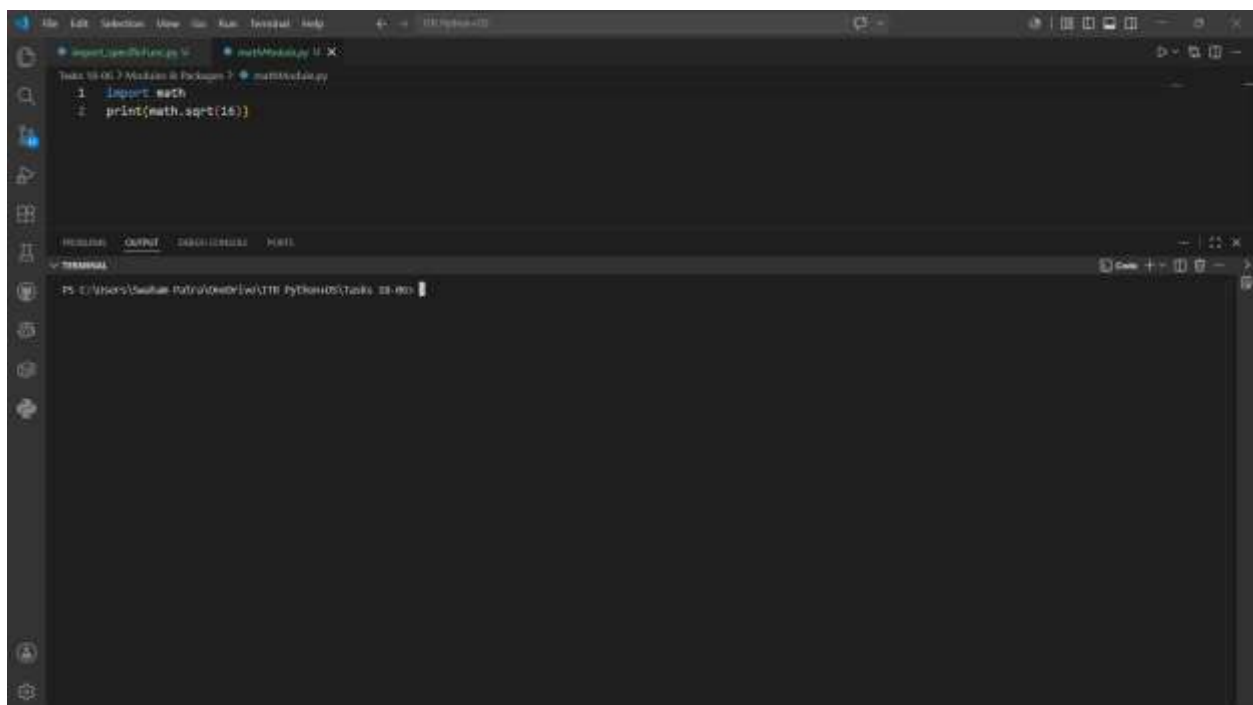


The screenshot shows an IDE with a Python script in the editor and a terminal window below it. The script is named `mathModule.py` and contains the following code:

```
1 import math
2 print(math.sqrt(16))
```

The terminal window shows the command `python -u %/Users/Seaham/Petro/Dev/IDE/Python/Task4-26/Module4 & Task4/mathModule.py` being executed, resulting in the output:

```
4.0
```

Task 5:

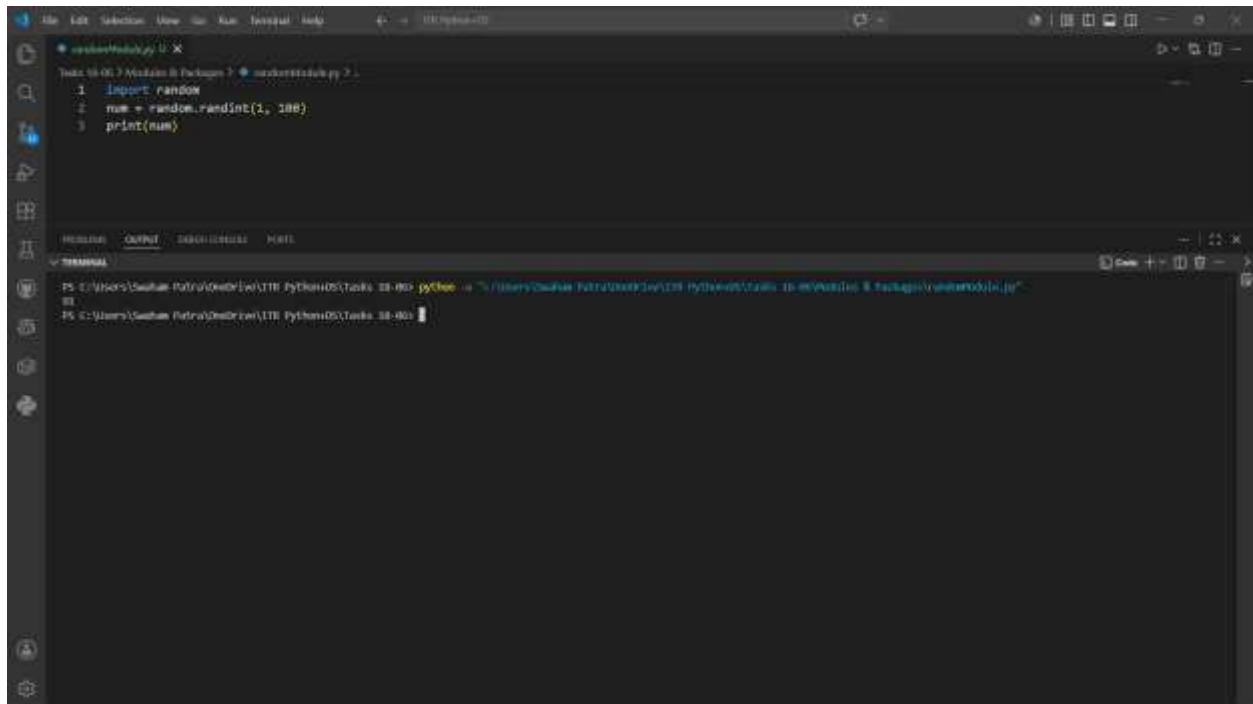


The screenshot shows an IDE with a Python file named `randomModule.py`. The code is as follows:

```
1 import random
2 num = random.randint(1, 100)
3 print(num)
```

Below the code editor is a terminal window. The terminal shows the command `python randomModule.py` being executed, resulting in the output `81`.

Task 6:

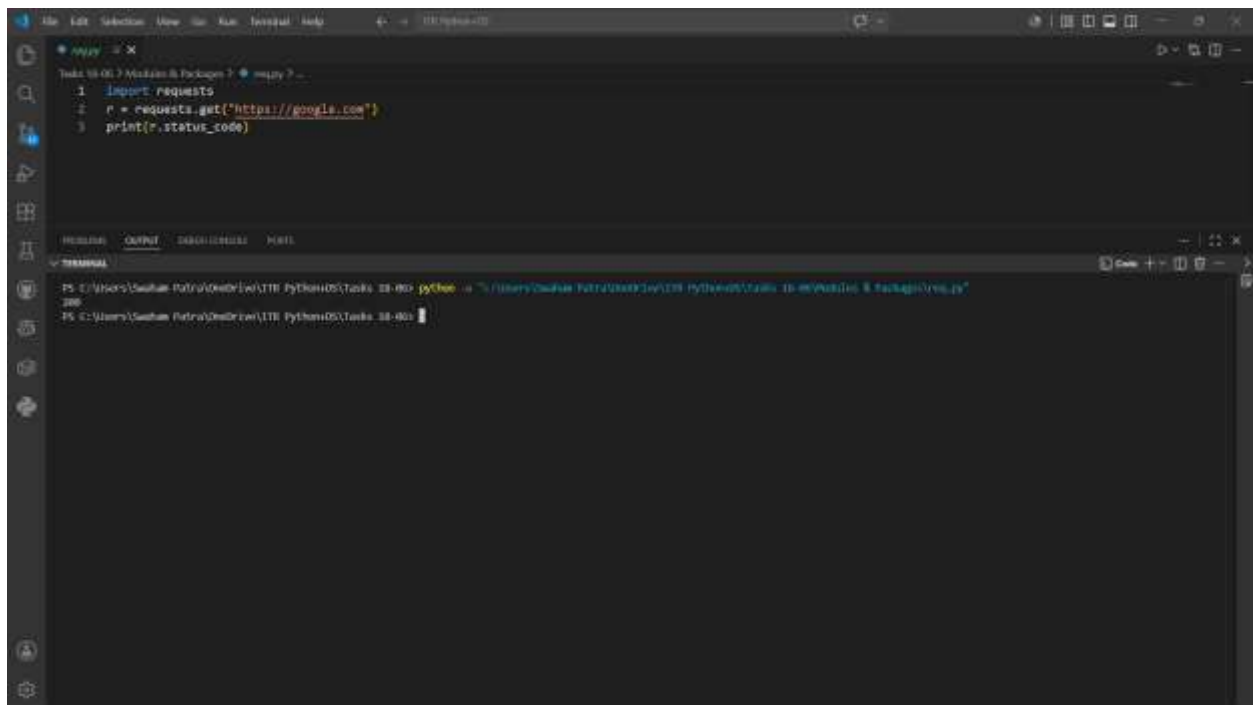


The screenshot shows an IDE with a Python file named `req.py`. The code is as follows:

```
1 import requests
2 r = requests.get("https://panga.com")
3 print(r.status_code)
```

Below the code editor is a terminal window. The terminal shows the command `python req.py` being executed, resulting in the output `200`.

File Handling :

Task 7:

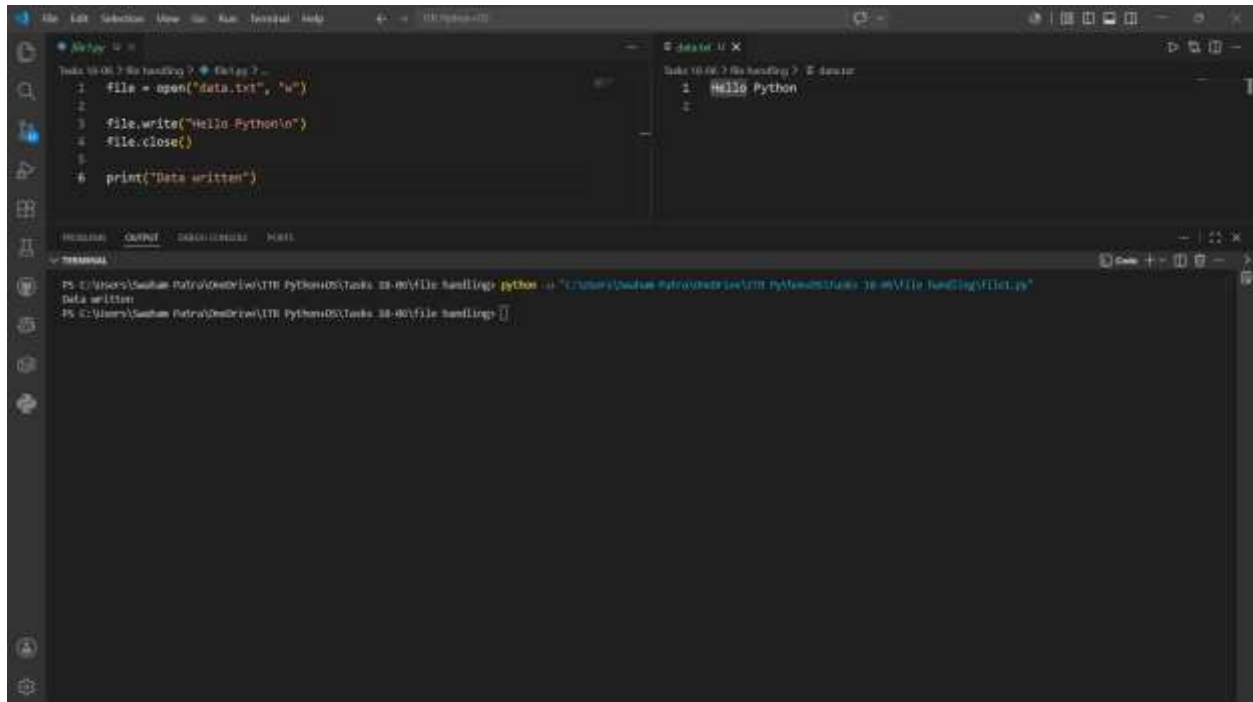


The screenshot shows a code editor with a file named `file_handling.py`. The code defines a function `write_data` that opens a file named `data.txt` in write mode ('w') and writes the string `"Hello Python"` to it. The function then prints `"Data written"`. The terminal output shows the command `python file_handling.py` being executed, resulting in the output `Data written`.

```
def write_data():  
    file = open("data.txt", "w")  
    file.write("Hello Python")  
    file.close()  
    print("Data written")  
  
if __name__ == "__main__":  
    write_data()
```

```
PS C:\Users\Sushan Patra\OneDrive\IT\Python\Tasks 28-00\file_handling> python file_handling.py  
Data written  
PS C:\Users\Sushan Patra\OneDrive\IT\Python\Tasks 28-00\file_handling>
```

Task 8:

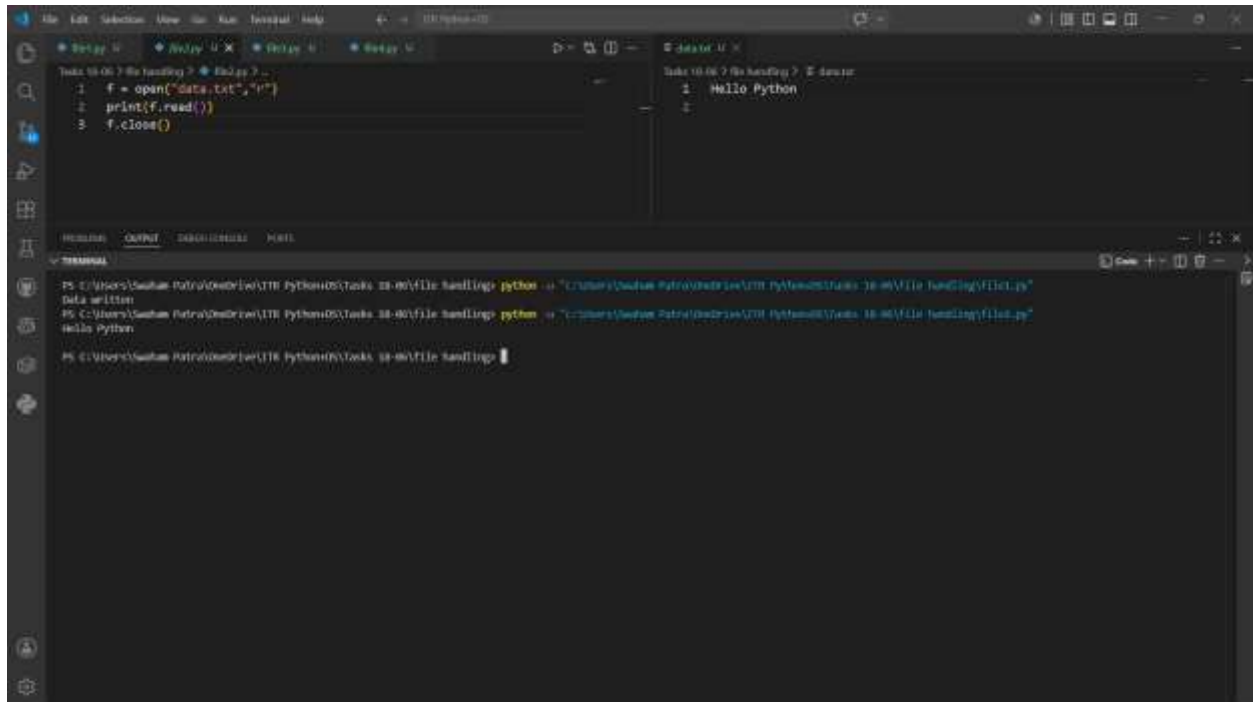


The screenshot shows a code editor with a file named `file_handling.py`. The code defines a function `read_data` that opens a file named `data.txt` in read mode ('r') and reads the content of the file. The function then prints the content and closes the file. The terminal output shows the command `python file_handling.py` being executed, resulting in the output `Hello Python`.

```
def read_data():  
    f = open("data.txt", "r")  
    print(f.read())  
    f.close()  
  
if __name__ == "__main__":  
    read_data()
```

```
PS C:\Users\Sushan Patra\OneDrive\IT\Python\Tasks 28-00\file_handling> python file_handling.py  
Hello Python  
PS C:\Users\Sushan Patra\OneDrive\IT\Python\Tasks 28-00\file_handling>
```

Task 9:

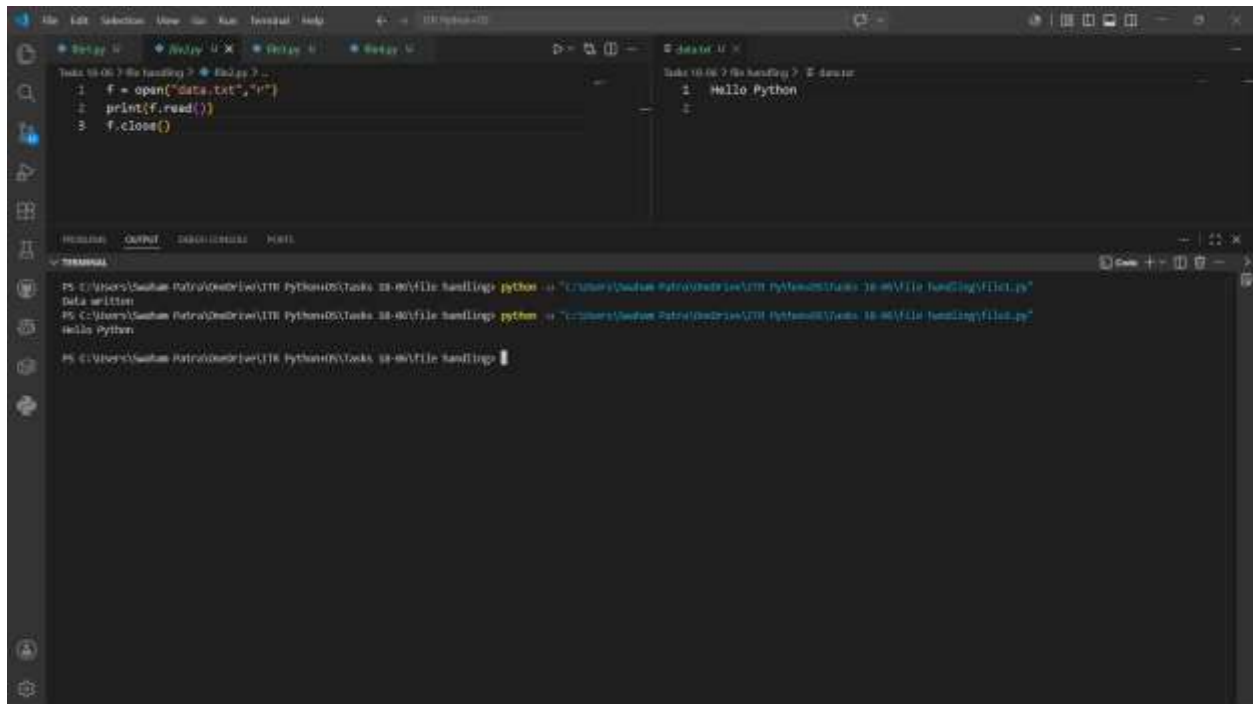

The screenshot shows the Visual Studio Code interface for Task 9. The editor has two tabs: 'data.txt' and 'data.py'. The 'data.txt' tab contains the following Python code:

```
1 f = open("data.txt", "r")
2 print(f.read())
3 f.close()
```


The 'data.py' tab contains the following Python code:

```
1 Hello Python
2
```

The terminal at the bottom shows the execution of the Python script:

```
PS C:\Users\Sasha Petru\OneDrive\OneDrive\Python\Tasks 10-00\file_handling> python -i "C:\Users\Sasha Petru\OneDrive\OneDrive\Python\Tasks 10-00\file_handling\file.py"
Data written
PS C:\Users\Sasha Petru\OneDrive\OneDrive\Python\Tasks 10-00\file_handling> python -i "C:\Users\Sasha Petru\OneDrive\OneDrive\Python\Tasks 10-00\file_handling\file.py"
Hello Python
PS C:\Users\Sasha Petru\OneDrive\OneDrive\Python\Tasks 10-00\file_handling>
```

Task 10:

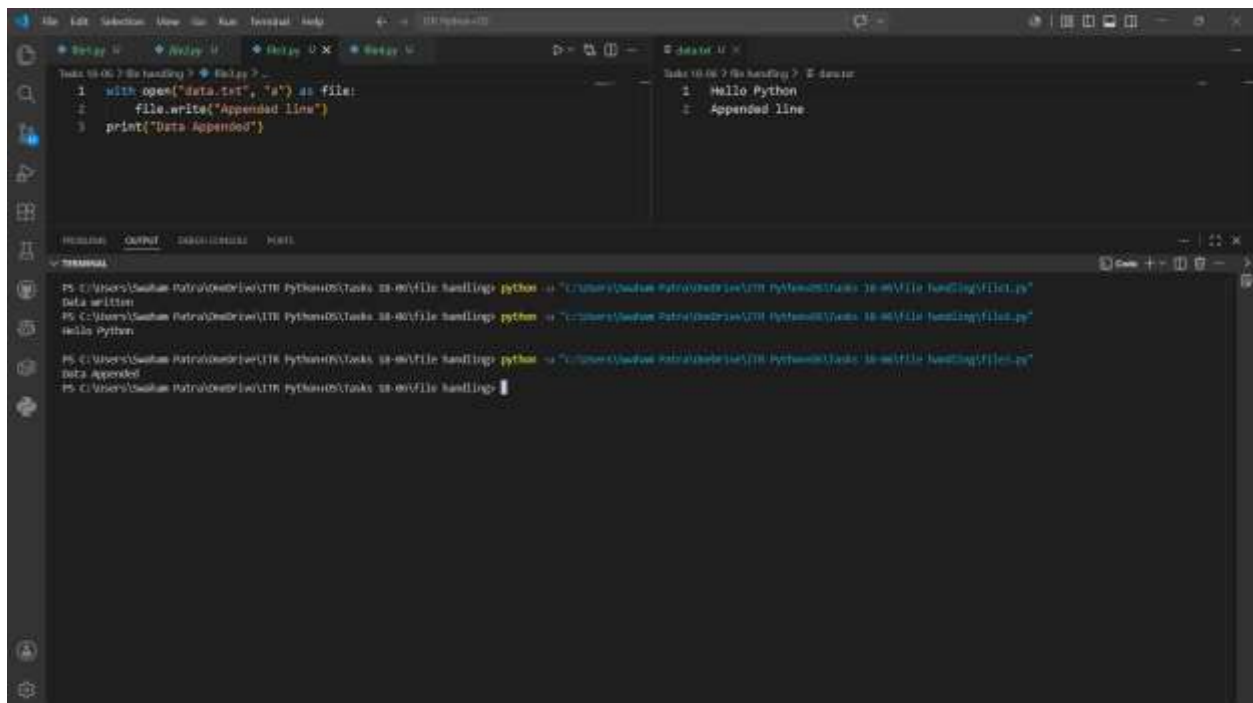

The screenshot shows the Visual Studio Code interface for Task 10. The editor has two tabs: 'data.txt' and 'data.py'. The 'data.txt' tab contains the following Python code:

```
1 with open("data.txt", "a") as file:
2     file.write("Appended line")
3 print("Data Appended")
```

The 'data.py' tab contains the following Python code:

```
1 Hello Python
2 Appended line
```

The terminal at the bottom shows the execution of the Python script:

```
PS C:\Users\Sasha Petru\OneDrive\OneDrive\Python\Tasks 10-00\file_handling> python -i "C:\Users\Sasha Petru\OneDrive\OneDrive\Python\Tasks 10-00\file_handling\file.py"
Data written
PS C:\Users\Sasha Petru\OneDrive\OneDrive\Python\Tasks 10-00\file_handling> python -i "C:\Users\Sasha Petru\OneDrive\OneDrive\Python\Tasks 10-00\file_handling\file.py"
Hello Python
PS C:\Users\Sasha Petru\OneDrive\OneDrive\Python\Tasks 10-00\file_handling> python -i "C:\Users\Sasha Petru\OneDrive\OneDrive\Python\Tasks 10-00\file_handling\file.py"
Data Appended
PS C:\Users\Sasha Petru\OneDrive\OneDrive\Python\Tasks 10-00\file_handling>
```

Task 11:

The screenshot displays the PyCharm IDE interface. The main editor window shows a Python script named `tasks_18-00_7-file_handling_7.py` with the following code:

```
1 with open("data.txt", "r") as file:
2     lines = file.readlines()
3     for line in lines:
4         print(line.strip())
```

The right-hand pane shows the output of the script, which is:

```
1 Hello Python
2 Appended line
```

The bottom pane shows the terminal output, which includes the command to run the script and the resulting output:

```
PS C:\Users\Souham Patra\OneDrive\ITR Python\05\tasks_18-00\file_handling\ python -u "C:\Users\Souham Patra\OneDrive\ITR Python\05\tasks_18-00\file_handling\file.py"
Data written
PS C:\Users\Souham Patra\OneDrive\ITR Python\05\tasks_18-00\file_handling\ python -u "C:\Users\Souham Patra\OneDrive\ITR Python\05\tasks_18-00\file_handling\file.py"
Hello Python
PS C:\Users\Souham Patra\OneDrive\ITR Python\05\tasks_18-00\file_handling\ python -u "C:\Users\Souham Patra\OneDrive\ITR Python\05\tasks_18-00\file_handling\file.py"
Data Appended
PS C:\Users\Souham Patra\OneDrive\ITR Python\05\tasks_18-00\file_handling\ python -u "C:\Users\Souham Patra\OneDrive\ITR Python\05\tasks_18-00\file_handling\file.py"
Hello Python
Appended line
PS C:\Users\Souham Patra\OneDrive\ITR Python\05\tasks_18-00\file_handling\
```