



Name: Gagan Dhanapune **Email:** gagandhanapune@gmail.com

1. Project Overview

This project provides a comprehensive analysis of the Netflix content dataset from Kaggle. The goal is to process a raw dataset, uncover meaningful insights through analysis and visualization, and apply machine learning models to discover patterns and make predictions. The project is structured into distinct phases, starting from data preparation and moving through to advanced analytics.

Project Modules:

1. **Data Cleaning & Preprocessing:** Handling missing values and standardizing data.
2. **Data Normalization:** Preparing categorical data for analysis and modeling.
3. **Exploratory Data Analysis (EDA) & Feature Engineering:** Visualizing trends and creating new, insightful features.
4. **Modeling & Advanced Analytics:** Applying unsupervised and supervised learning to discover patterns and make predictions.

2. Phase 1: Data Cleaning

Objective: To transform the raw dataset into a clean, consistent, and reliable format suitable for analysis.

Steps Performed:

1. **Loading the Dataset:** The initial netflix_titles.csv dataset, containing **8,807 rows and 12 columns**, was loaded into a pandas DataFrame.
2. **Handling Missing Values:** A significant number of missing values were identified in the director, cast, and country columns. These were filled with the placeholder "**NA**" to ensure no data was lost while acknowledging the absence of information.
3. **Removing Duplicates:** All duplicate rows were identified and removed to ensure the integrity and accuracy of the analysis.
4. **Duration Extraction:** The duration column (e.g., "90 min", "2 Seasons") was split into two new columns:
 - duration_num: A numeric value (e.g., 90, 2).
 - duration_type: The unit of duration (e.g., "min", "Season").
5. **Date Formatting:** The date_added column was converted to a standard datetime format to enable time-based analysis.
6. **Text Standardization:** Extra leading/trailing spaces were removed from text columns like title to ensure consistency.

Outcome: The result of this phase was a clean and structured dataset, ready for normalization and exploratory analysis.

3. Phase 2: Data Normalization

Objective: To convert categorical data into a numerical format, making it suitable for mathematical and statistical modeling.

Steps Performed:

1. Encoding Categorical Features:

- **Genres (listed_in):** This column often contained multiple genres. It was one-hot encoded using MultiLabelBinarizer to create separate binary columns for each genre (e.g., is_Drama, is_Comedy).
- **Rating:** The rating column was ordinally encoded based on content maturity levels (e.g., G, PG, TV-MA).
- **Country:** The country column was label-encoded to convert country names into unique numeric codes.

2. Feature Engineering:

- The type column was encoded into two binary columns: is_movie and is_tv_show.

Outcome: This phase produced a fully numeric, normalized dataset (netflix_normalized.csv) prepared for advanced analysis and machine learning.


4. Phase 3: Exploratory Data Analysis (EDA)

Objective: To visualize and understand the key trends, distributions, and relationships within the cleaned dataset.

Key Insights from EDA:


1. Content Type Distribution:

- The Netflix library is predominantly composed of **Movies**, which account for **69.4%** of the content.
- **TV Shows** make up the remaining **30.6%**, indicating a clear focus on feature-length films.

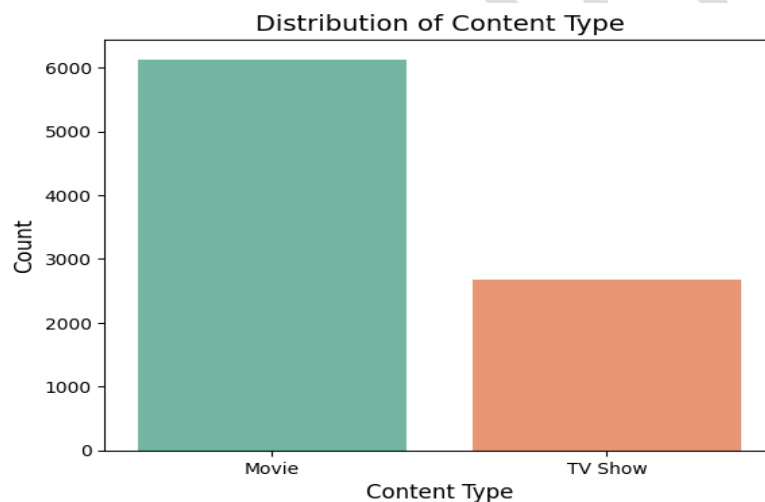


2. Content Growth Over Time:

- A dramatic increase in content addition began around **2015**.
- The peak years for adding new titles were **2018 and 2019**, showing a period of aggressive content acquisition.

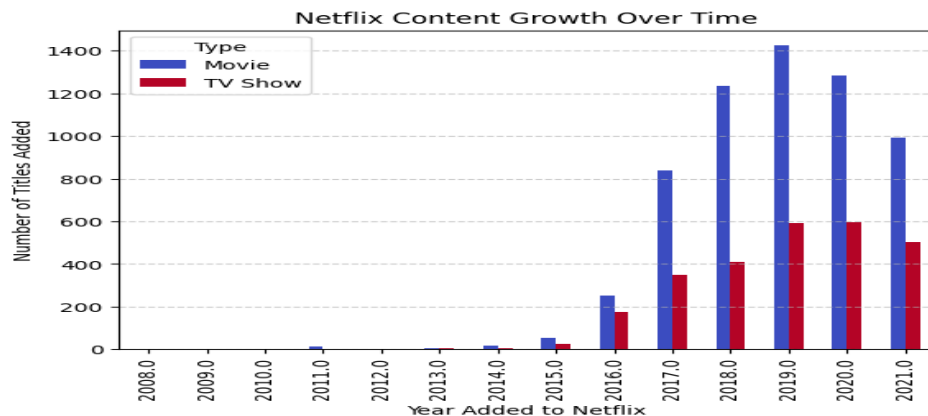


3. Release Year Trends:

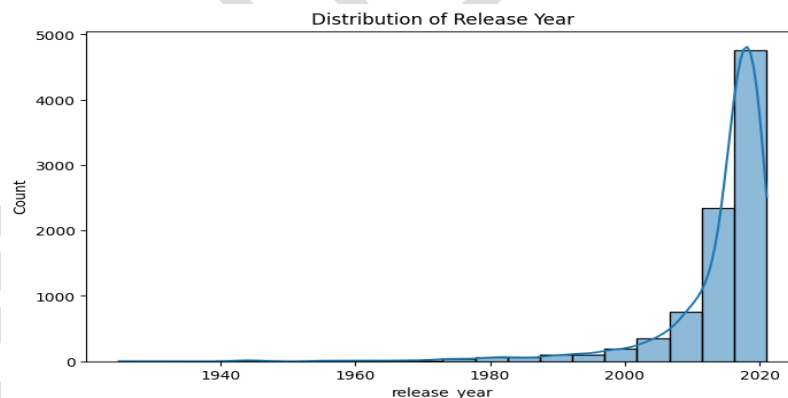

- The majority of content on Netflix is recent, with most titles produced after **2010**.
- The median release year is **2017**, suggesting the catalog is kept fresh with modern content.


4. Rating Analysis:

- The most common ratings are **TV-MA** (Mature Audiences) and **TV-14** (Parents Strongly Cautioned).
- This shows that Netflix's content is heavily skewed towards **mature and young adult audiences**.
- Content for young children (TV-Y, TV-G) is significantly less common.

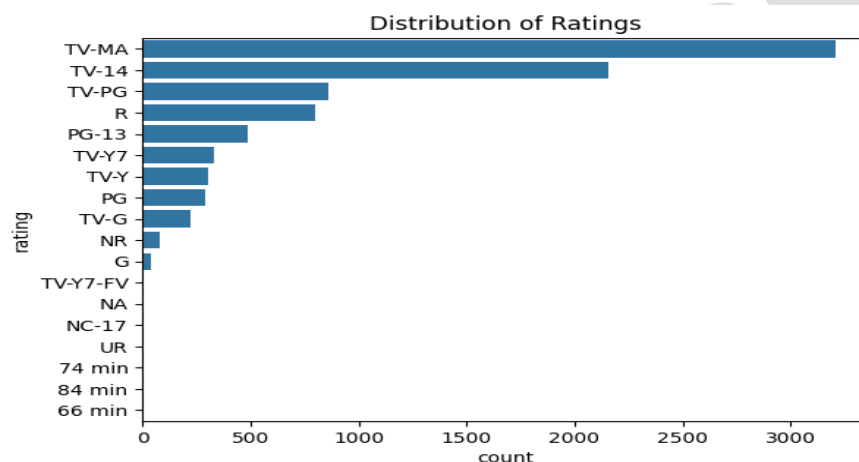


5. Geographical Distribution:

- The **United States** is the largest contributor of content to the Netflix library by a wide margin.
- **India** ranks as the second-largest contributor, highlighting the importance of its film industry.
- The **United Kingdom** is third, followed by other key markets like Canada and South Korea.

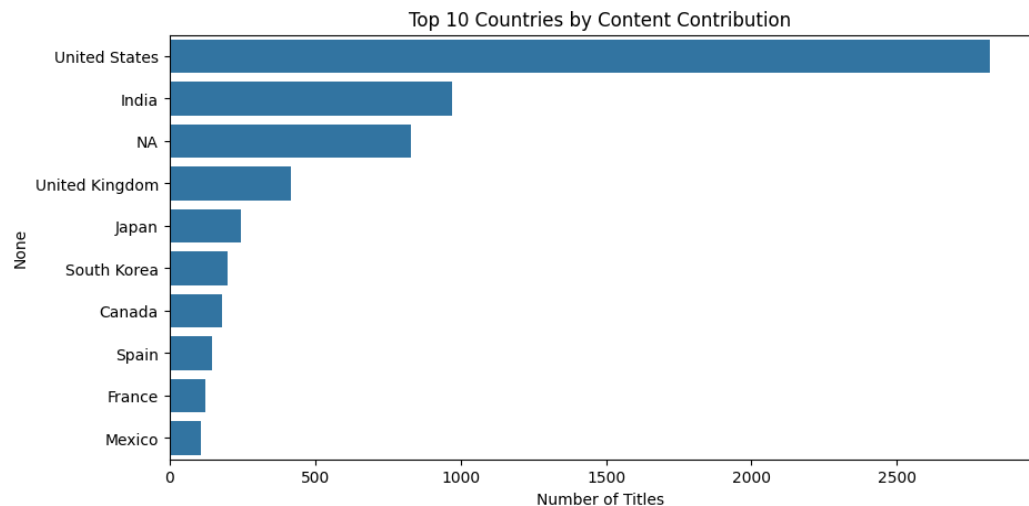

6. Duration Analysis:

- On average, the duration of a movie is significantly longer (in minutes) than the number of seasons for a TV show.
- For TV shows, there is a trend that more recently released shows tend to have fewer seasons.

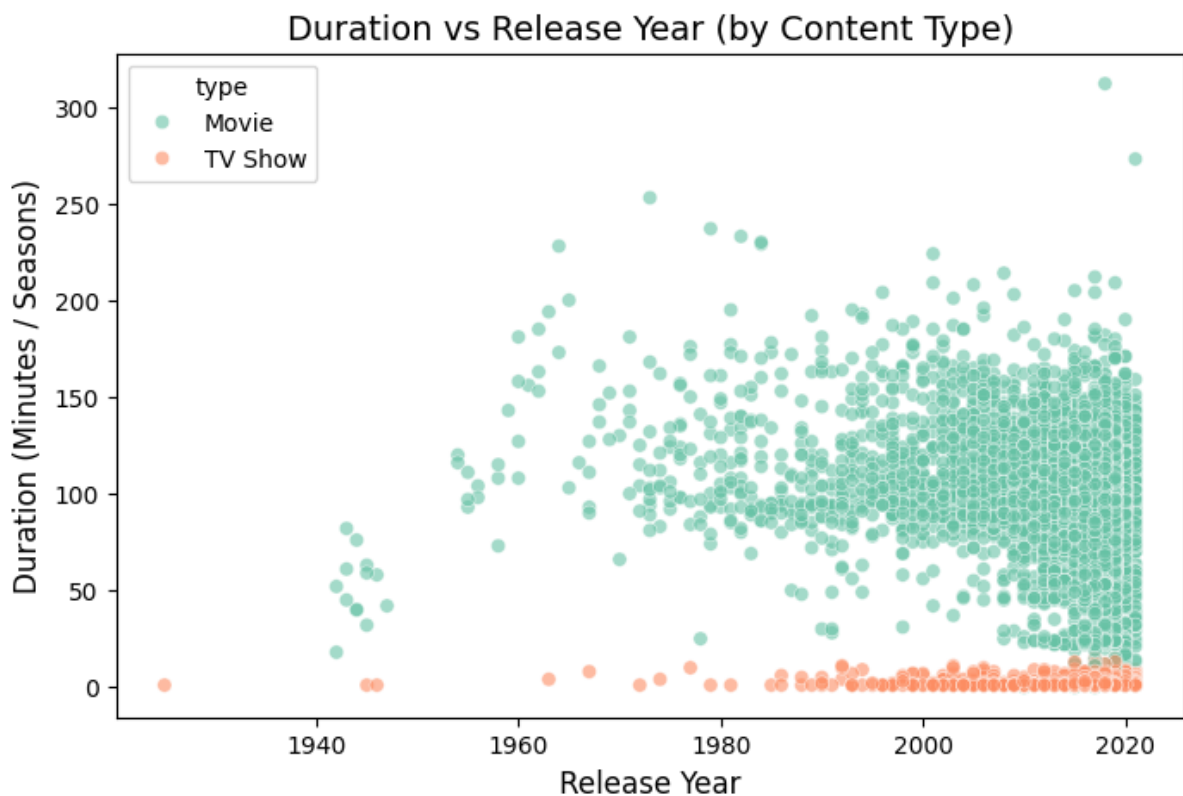


5. Phase 4: Feature Engineering


Objective: To create new, meaningful features from the existing data to enhance the modeling phase and derive deeper business insights.

New Features Created:


1. **Content_Length_Category:** Categorized titles into groups like "Short," "Medium," and "Long" based on their duration (minutes for movies, seasons for TV shows).

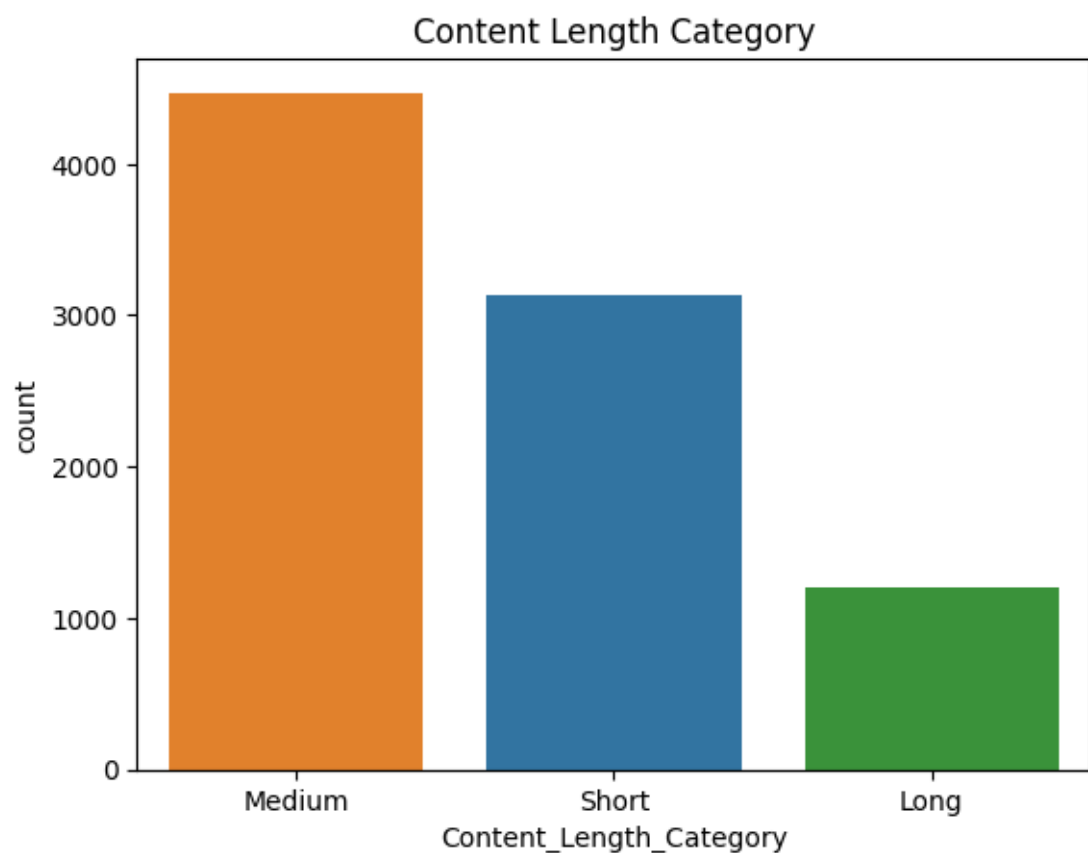


2. **Content_Type**: Differentiated between "Original" and "Licensed" content, which is a key business metric.

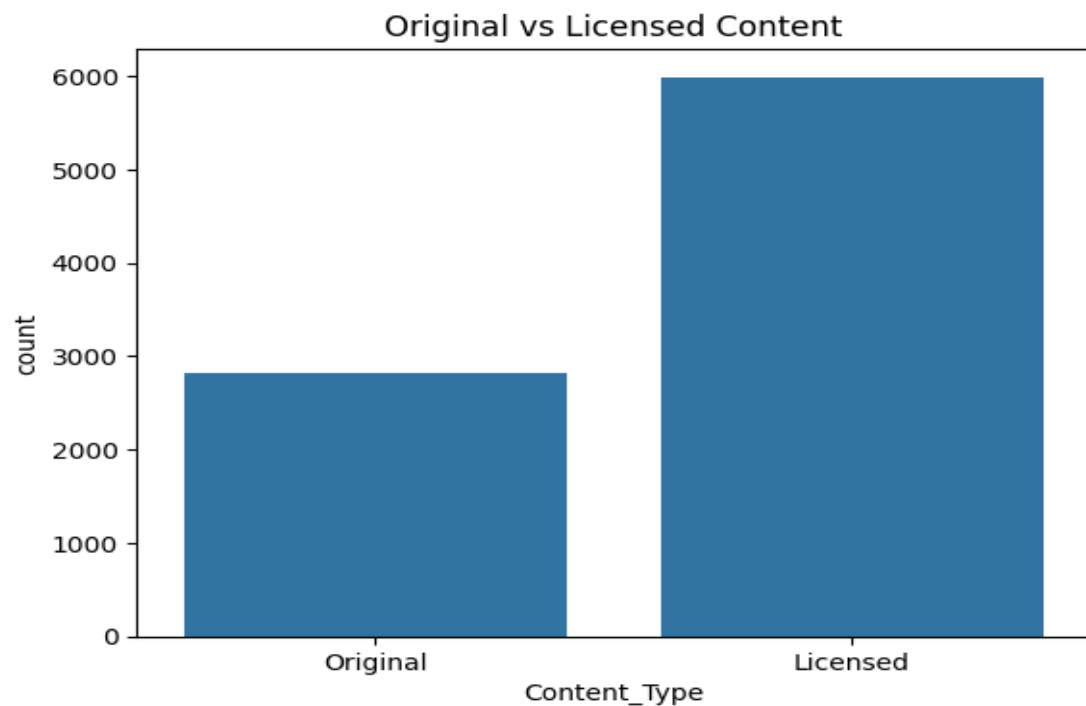

3. **Content_Age_Group**: Simplified the rating column into broader audience categories: "Kids," "Teens," and "Adults."

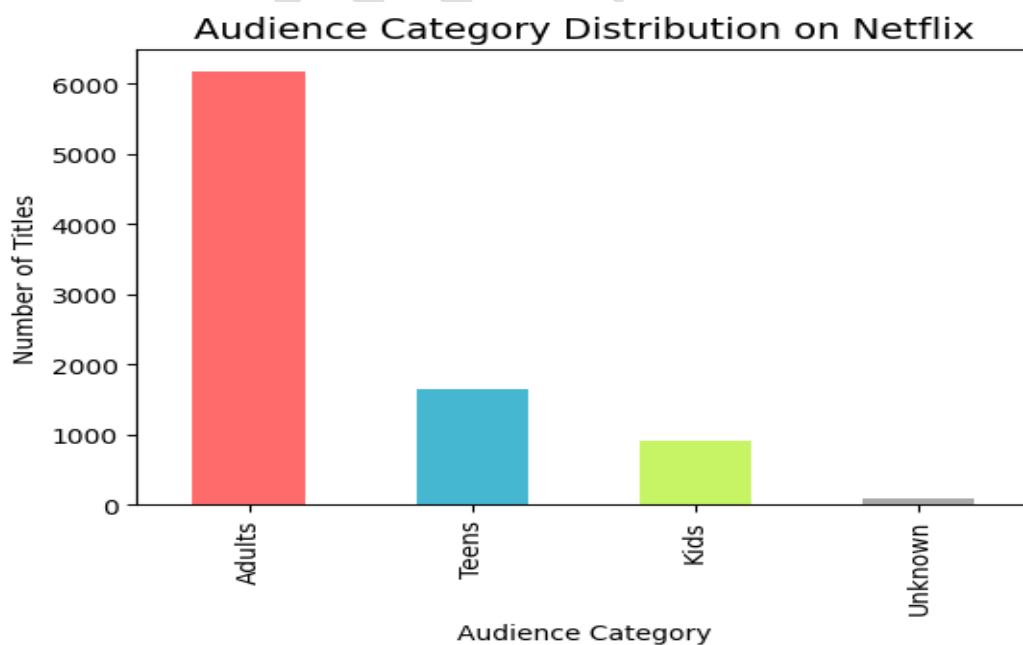



Audience Category Distribution (%)

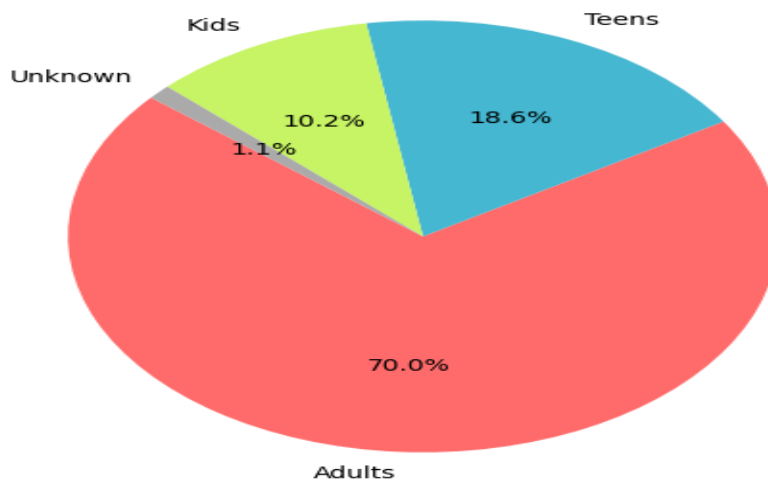

4. **Region:** Mapped countries of production to geographical regions like "North America," "Asia," and "Europe."

Region-Wise Content Distribution

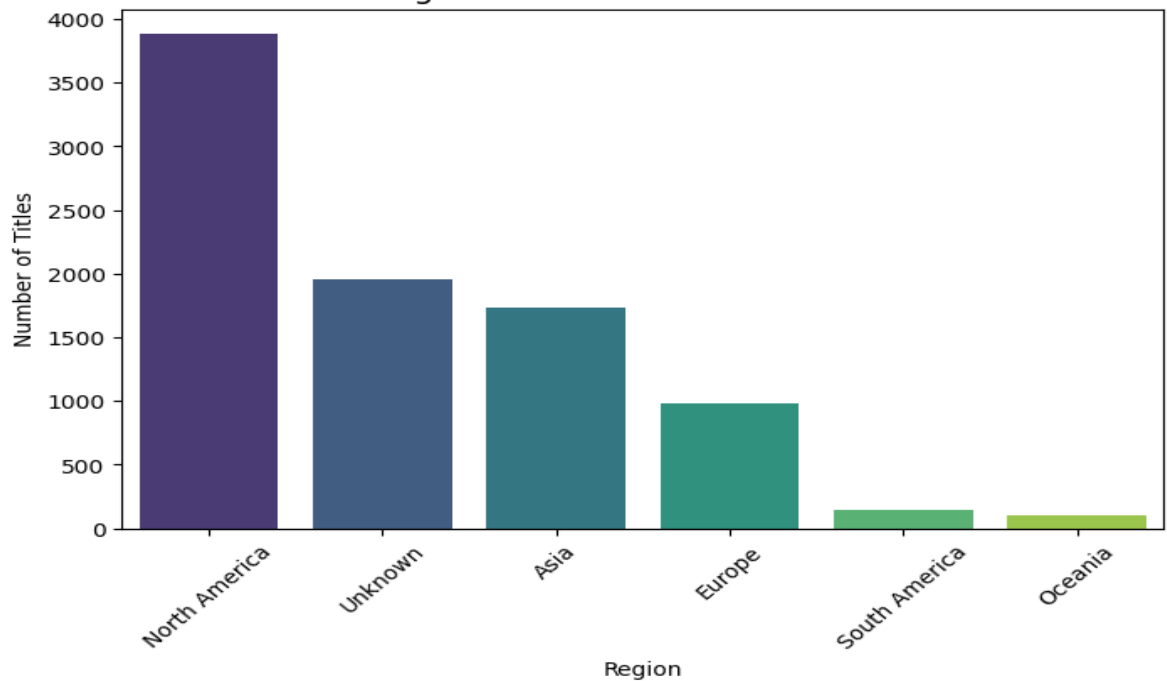

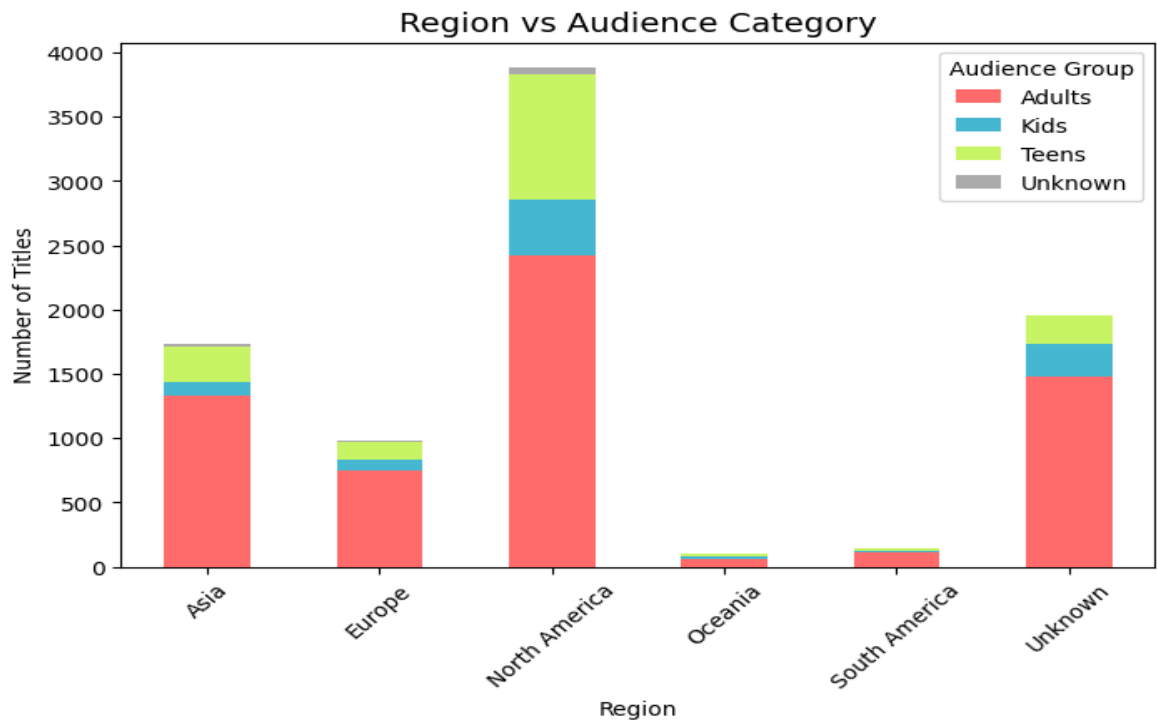

5. Time-Based

Features: Extracted `year_added` and `month_added` from the `date_added` column to analyze temporal trends.

```
Oct 22, 2025 (<1s) 17
# Converting 'date_added' to datetime allows for accurate extraction and manipulation of date components.
# Extracting year and month enables time-based analysis, such as content trends by year or month.
# This helps in understanding when content was added and identifying seasonal or yearly patterns.
```

```
Oct 22, 2025 (<1s) 18 Python
# Convert 'date_added' to datetime
df['date_added'] = pd.to_datetime(df['date_added'], errors='coerce')
```

```
Oct 22, 2025 (<1s) 19
# Extract year and month from date_added
df['year_added'] = df['date_added'].dt.year
df['month_added'] = df['date_added'].dt.month
```

Outcome: This phase produced a feature-rich dataset (Netflix_FE_Data.csv) that provides a much deeper understanding of the content library.

6. Phase 5: Modeling & Advanced Analytics

Objective: To apply machine learning algorithms to uncover hidden patterns (clustering) and build a predictive model (classification).

Part A: Clustering (Unsupervised Learning)


Goal: To group similar Netflix titles based on their genre, duration, and rating. Since the data is unlabeled, K-Means clustering was used to identify natural groupings.

Process:

1. **Feature Selection:** Chose `listed_in` (genre), `duration_num`, and rating as the features for clustering.
2. **Data Preparation:**
 - Genres were one-hot encoded.
 - TV show season counts were converted to an approximate minute-equivalent to standardize the duration feature.
 - Ratings were label-encoded into numerical values.
3. **Scaling:** All features were scaled using `StandardScaler` to ensure that no single feature dominated the clustering algorithm due to its scale.
4. **Modeling:** A K-Means model was trained to group the data into **5 distinct clusters**.

Results & Insights:

- The clustering successfully grouped the titles. **Cluster 2** was the largest, containing **70%** of the content.

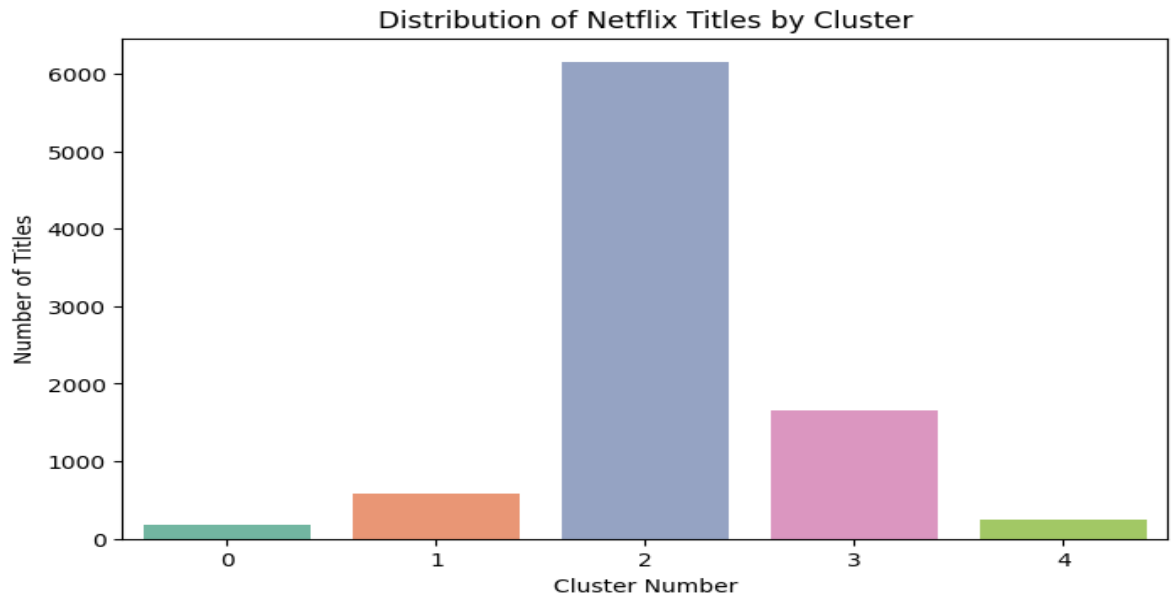

- **Cluster Interpretation:**
 - **Cluster 0, 3, 4:** Primarily contained TV Shows with TV-MA ratings.
 - **Cluster 1 & 2:** Predominantly consisted of Movies with TV-MA ratings.
- The model effectively separated Movies and TV Shows, indicating that duration was a strong differentiating factor.

Part B: Classification (Supervised Learning)

Goal: To build a model that can predict whether a piece of content is a **Movie** or a **TV Show** based on its features.

Process:


- 1. **Feature & Target Selection:**
 - **Features (X):** release_year, duration_num, rating.
 - **Target (y):** type (Movie/TV Show).
- 2. **Data Preparation:** The categorical rating and type columns were converted into numerical format using LabelEncoder.
- 3. **Train-Test Split:** The data was split into a training set (80%) and a testing set (20%).
- 4. **Modeling:** A **Random Forest Classifier** was trained on the training data.

Results & Insights:

- **Model Performance:** The model achieved an outstanding **accuracy of 99.9%** on the test set.


Classification Report:				
	precision	recall	f1-score	support
0	1.00	1.00	1.00	1214
1	1.00	1.00	1.00	548
accuracy			1.00	1762
macro avg	1.00	1.00	1.00	1762
weighted avg	1.00	1.00	1.00	1762
Accuracy: 0.9994324631101021				

- **Confusion Matrix:** The matrix showed that the model made almost no errors, correctly classifying 1214 movies and 547 TV shows, with only one misclassification.

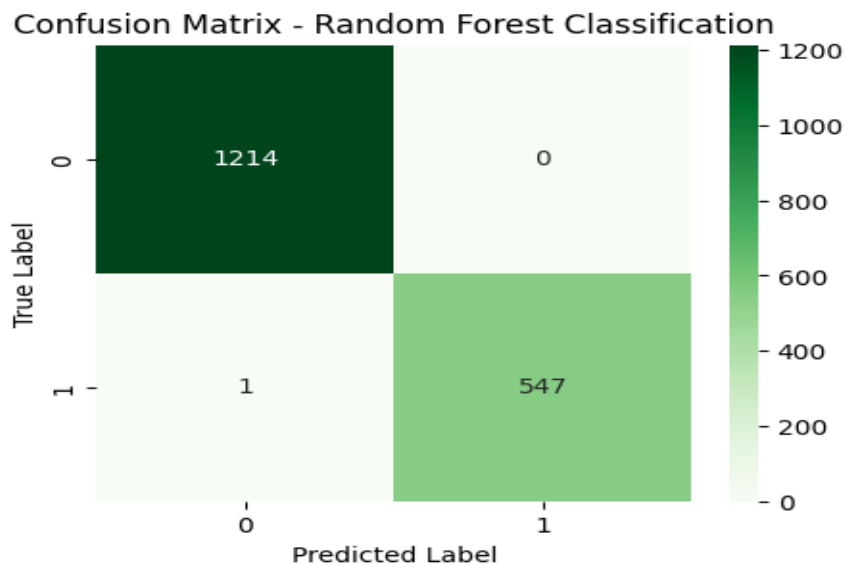


- **Feature Importance:** The analysis revealed that **duration_num** was by far the most important feature for distinguishing between movies and TV shows. This is intuitive, as movies are measured in minutes (e.g., 90-150) while TV shows are measured in seasons (e.g., 1-10). Rating and release_year had minimal impact on the prediction.

Distribution of Predicted Content Types

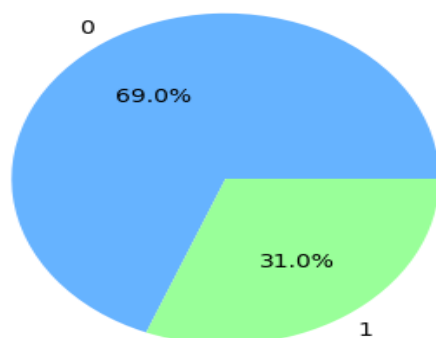

Feature Importance in Netflix Classification

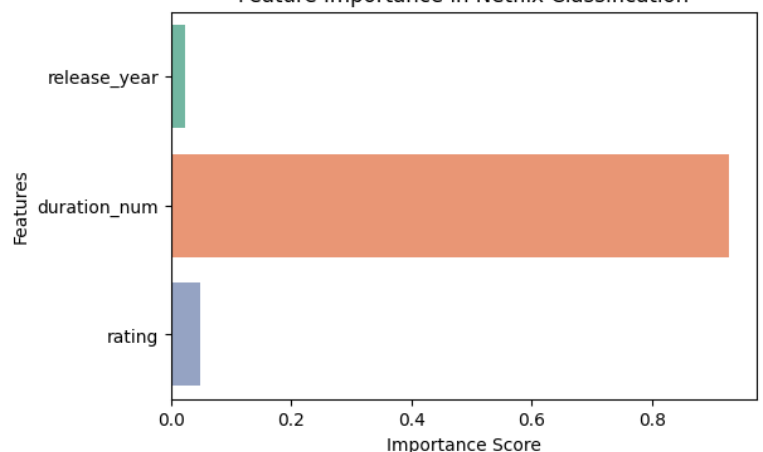

gagan . docs