


TRAINING PROGRAM


Postman endpoints Screenshot

Entity -> Customer

Post Multiple User

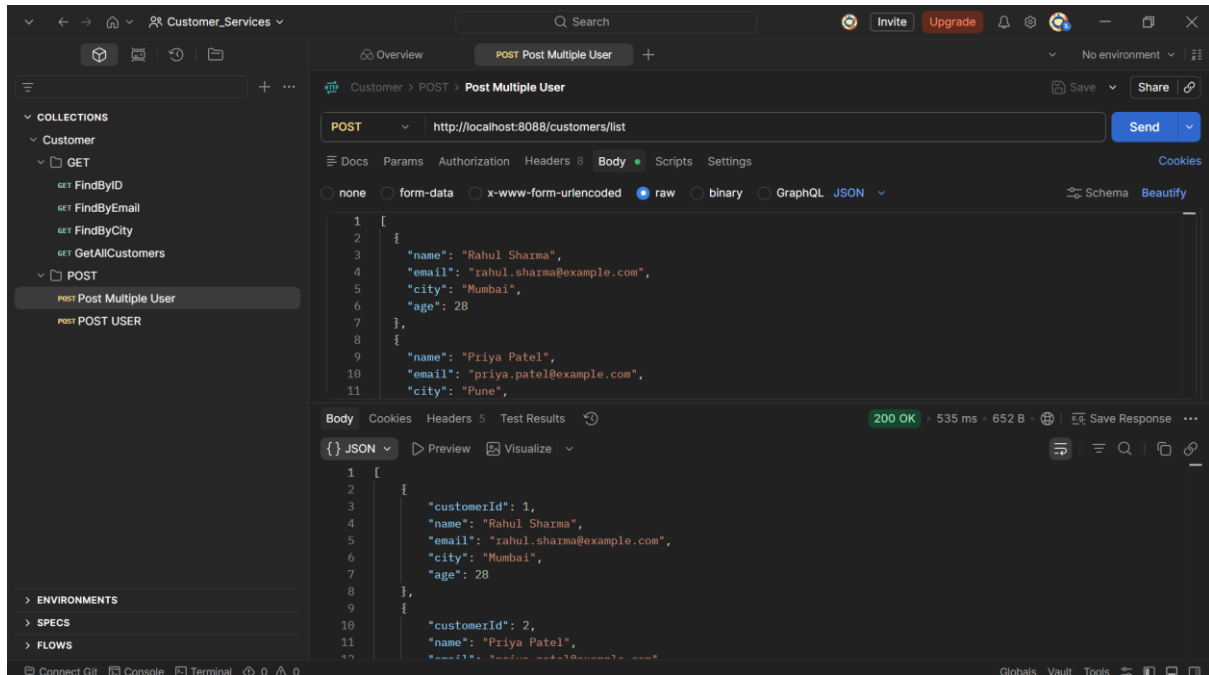

Post a user

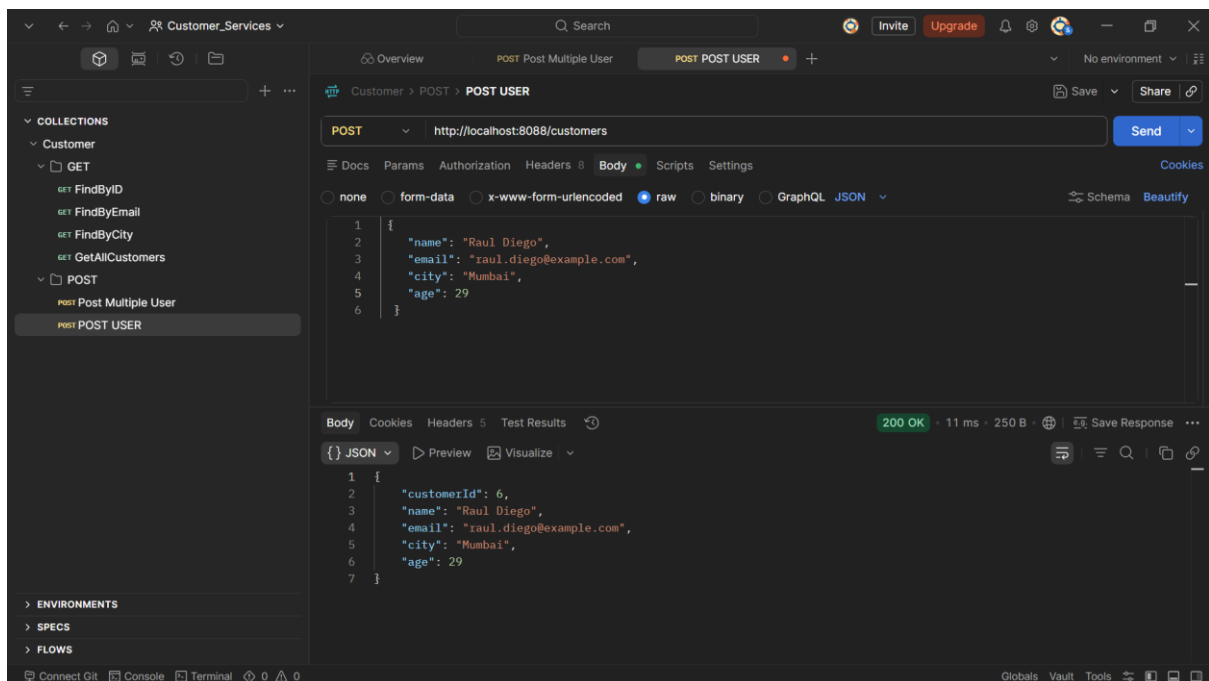

Get All User

The screenshot shows the Postman interface with the following details:

- Request:** GET `http://localhost:8088/customers`
- Status:** 200 OK, 274 ms, 747 B
- Response Body (JSON):**

```
[{"customerid": 1, "name": "Rahul Sharma", "email": "rahul.sharma@example.com", "city": "Mumbai", "age": 28}, {"customerid": 2, "name": "Priya Patel", "email": "priya.patel@example.com", "city": "Pune", "age": 24}, {"customerid": 3, "name": "Raul Diego", "email": "raul.diego@example.com", "city": "San Francisco", "age": 30}, {"customerid": 4, "name": "Amit Patel", "email": "amit.patel@example.com", "city": "Mumbai", "age": 25}, {"customerid": 5, "name": "Neha Sharma", "email": "neha.sharma@example.com", "city": "Delhi", "age": 22}, {"customerid": 6, "name": "Raul Diego", "email": "raul.diego@example.com", "city": "San Francisco", "age": 30}, {"customerid": 7, "name": "Priya Patel", "email": "priya.patel@example.com", "city": "Pune", "age": 24}, {"customerid": 8, "name": "Amit Patel", "email": "amit.patel@example.com", "city": "Mumbai", "age": 25}, {"customerid": 9, "name": "Neha Sharma", "email": "neha.sharma@example.com", "city": "Delhi", "age": 22}, {"customerid": 10, "name": "Rahul Sharma", "email": "rahul.sharma@example.com", "city": "Mumbai", "age": 28}, {"customerid": 11, "name": "Priya Patel", "email": "priya.patel@example.com", "city": "Pune", "age": 24}, {"customerid": 12, "name": "Amit Patel", "email": "amit.patel@example.com", "city": "Mumbai", "age": 25}, {"customerid": 13, "name": "Neha Sharma", "email": "neha.sharma@example.com", "city": "Delhi", "age": 22}, {"customerid": 14, "name": "Rahul Sharma", "email": "rahul.sharma@example.com", "city": "Mumbai", "age": 28}, {"customerid": 15, "name": "Priya Patel", "email": "priya.patel@example.com", "city": "Pune", "age": 24}, {"customerid": 16, "name": "Amit Patel", "email": "amit.patel@example.com", "city": "Mumbai", "age": 25}, {"customerid": 17, "name": "Neha Sharma", "email": "neha.sharma@example.com", "city": "Delhi", "age": 22}]
```

Find User By City

The screenshot shows the Postman interface with the following details:

- Request:** GET `http://localhost:8088/customers/city/Mumbai`
- Status:** 200 OK, 510 ms, 352 B
- Response Body (JSON):**

```
[{"customerid": 1, "name": "Rahul Sharma", "email": "rahul.sharma@example.com", "city": "Mumbai", "age": 28}, {"customerid": 4, "name": "Amit Patel", "email": "amit.patel@example.com", "city": "Mumbai", "age": 25}, {"customerid": 6, "name": "Raul Diego", "email": "raul.diego@example.com", "city": "San Francisco", "age": 30}, {"customerid": 8, "name": "Amit Patel", "email": "amit.patel@example.com", "city": "Mumbai", "age": 25}, {"customerid": 10, "name": "Rahul Sharma", "email": "rahul.sharma@example.com", "city": "Mumbai", "age": 28}, {"customerid": 12, "name": "Amit Patel", "email": "amit.patel@example.com", "city": "Mumbai", "age": 25}, {"customerid": 14, "name": "Rahul Sharma", "email": "rahul.sharma@example.com", "city": "Mumbai", "age": 28}, {"customerid": 16, "name": "Amit Patel", "email": "amit.patel@example.com", "city": "Mumbai", "age": 25}]]
```

Find User By Email

The screenshot shows the Postman interface with a GET request named "FindByEmail" selected. The URL is `http://localhost:8088/customers/email/priya.patel@example.com`. The response is a 200 OK status with a response time of 21 ms and a body of 294 B. The response body is displayed in JSON format.

Request:

- Method: GET
- URL: `http://localhost:8088/customers/email/priya.patel@example.com`

Response:

```
{
  "customerId": 2,
  "name": "Priya Patel",
  "email": "priya.patel@example.com",
  "city": "Pune",
  "age": 24
}
```

Find User By ID

The screenshot shows the Postman interface with a GET request named "FindById" selected. The URL is `http://localhost:8088/customers/2`. The response is a 200 OK status with a response time of 20 ms and a body of 250 B. The response body is displayed in JSON format.

Request:

- Method: GET
- URL: `http://localhost:8088/customers/2`

Response:

```
{
  "customerId": 2,
  "name": "Priya Patel",
  "email": "priya.patel@example.com",
  "city": "Pune",
  "age": 24
}
```

Update User By ID

The screenshot shows the Postman interface for a PUT request to `http://localhost:8088/customers/4`. The request body is a JSON object with the following fields:

```
{
  "name": "Swaraj Shelar",
  "email": "swaraj.shelar@gmail.com",
  "city": "Pune",
  "age": 22,
  "bankAccountNumber": "987654421012",
  "pin": 4321
}
```

The response is a 200 OK status with a response time of 155 ms and a body of 299 B. The response body is a JSON object with the following fields:

```
{
  "customerId": 4,
  "name": "Swaraj Shelar",
  "email": "swaraj.shelar@gmail.com",
  "city": "Pune",
  "age": 22,
  "bankAccountNumber": "987654421012",
  "pin": 4321
}
```


Delete User By ID

The screenshot shows the Postman interface for a DELETE request to `http://localhost:8088/customers/3`. The response is a 200 OK status with a response time of 217 ms and a body of 193 B. The response body is a raw text string:


```
1 Customer deleted successfully
```

Entity -> Product

Add Product List

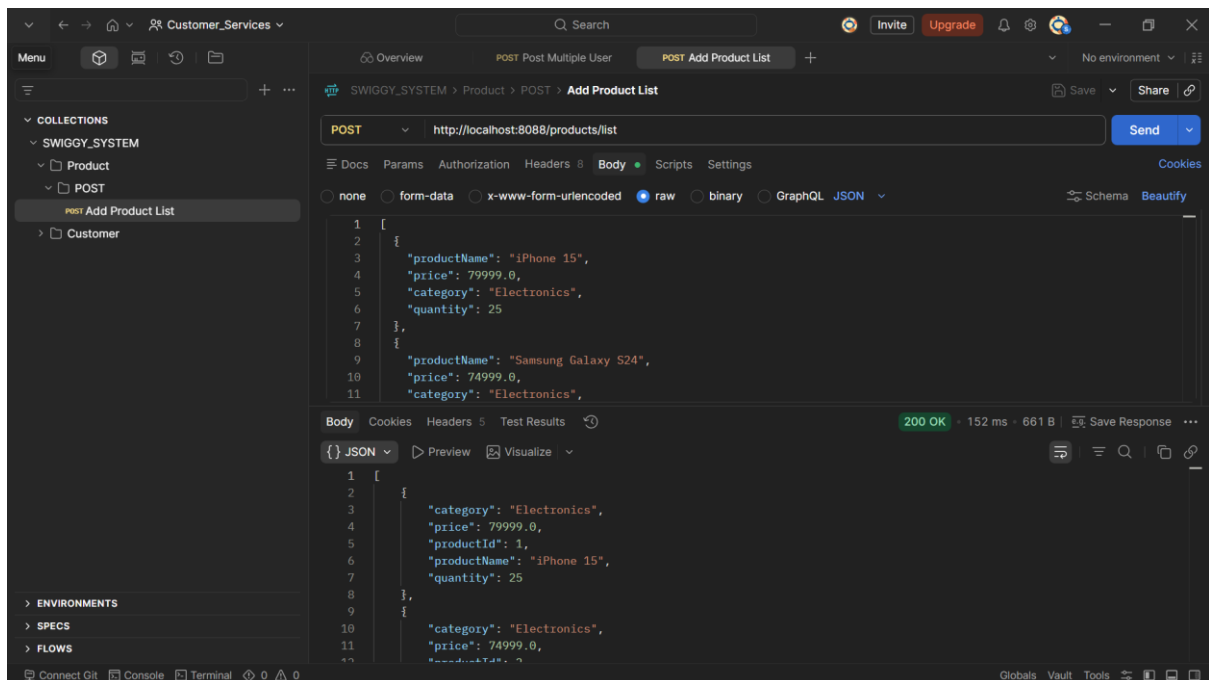

Add Product

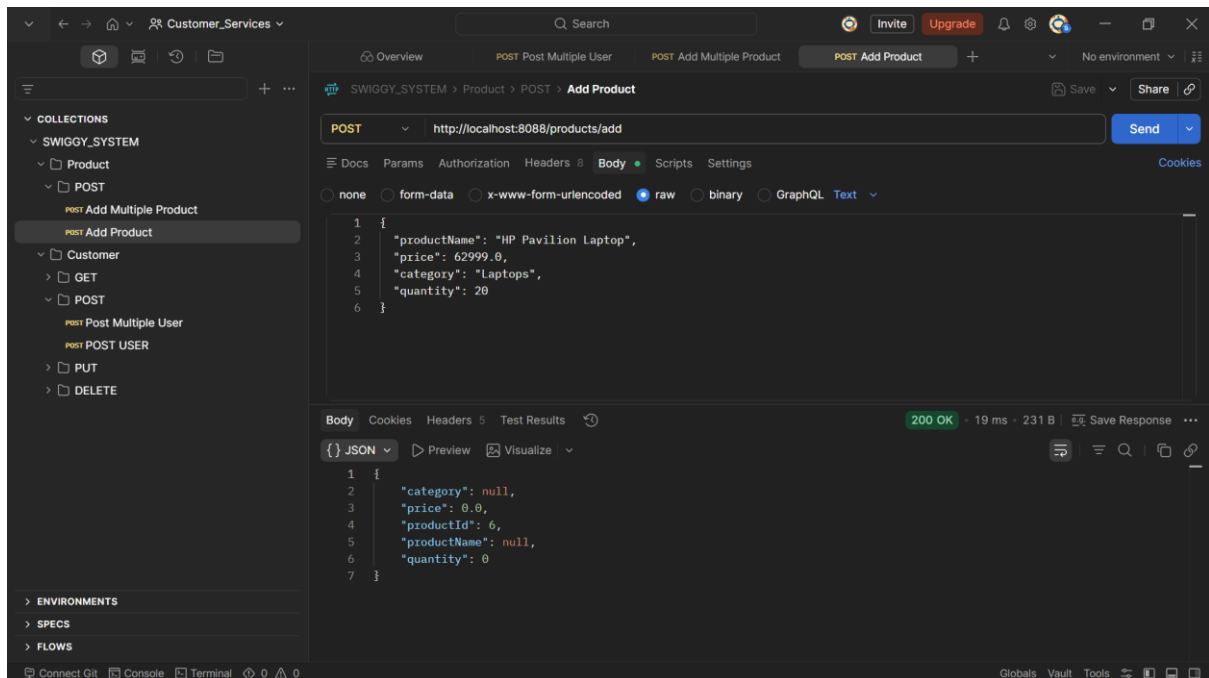

Update a Product

The screenshot shows the Postman interface with a PUT request to `http://localhost:8088/products/update/6`. The request body is a JSON object with the following details:

```
{  "productName": "HP Pavilion Laptop Updated",  "price": 59999.0,  "category": "Laptops",  "quantity": 18}
```

The response is a 200 OK status with a JSON body:

```
{  "category": "Laptops",  "price": 59999.0,  "productId": 6,  "productName": "HP Pavilion Laptop Updated",  "quantity": 18}
```

The left sidebar shows the collection structure: `SWIGGY_SYSTEM` > `Product` > `PUT Update Product Details`.

Get All Product

The screenshot shows the Postman interface with a GET request to `http://localhost:8088/products/list`. The response is a 200 OK status with a JSON array of product details:

```
[  {    "category": "Electronics",    "price": 79999.0,    "productId": 1,    "productName": "iPhone 15",    "quantity": 25  },  {    "category": "Electronics",    "price": 74999.0,    "productId": 2,    "productName": "Samsung Galaxy S24",    "quantity": 30  },  {    "category": "Footwear",    "price": 5999.0,    "productId": 3,    "productName": "Nike Air Max",    "quantity": 50  },  {    "category": "Laptops",    "price": 54999.0,    "productId": 6,    "productName": "HP Pavilion Laptop Updated",    "quantity": 18  }]
```

The left sidebar shows the collection structure: `SWIGGY_SYSTEM` > `Product` > `GET Get Product`.

Get Product By ID

The screenshot shows the Postman interface with a GET request to `http://localhost:8088/products/id/3`. The response is a 200 OK status with a JSON body containing product details.

Key	Value	Description	Bulk Edit
Key	Value	Description	


```
{
  "category": "Footwear",
  "price": 5999.0,
  "productId": 3,
  "productName": "Nike Air Max",
  "quantity": 50
}
```

Get Product By Category

The screenshot shows the Postman interface with a GET request to `http://localhost:8088/products/category/Electronics`. The response is a 200 OK status with a JSON array body containing two product objects.

```
[
  {
    "category": "Electronics",
    "price": 79999.0,
    "productId": 1,
    "productName": "iPhone 15",
    "quantity": 25
  },
  {
    "category": "Electronics",
    "price": 74999.0,
    "productId": 2,
    "productName": "Samsung Galaxy S24",
    "quantity": 30
  }
]
```

Delete Product By ID

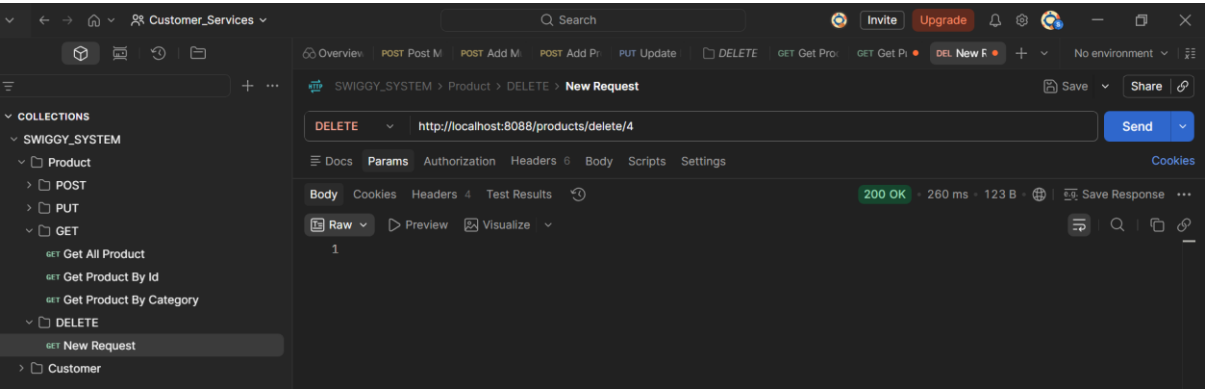

SELECT * FROM PRODUCT;

PRODUCT_ID	CATEGORY	PRICE	PRODUCT_NAME	QUANTITY
1	Electronics	79999.0	iPhone 15	25
2	Electronics	74999.0	Samsung Galaxy S24	30
3	Footwear	5999.0	Nike Air Max	50
4	Laptops	54999.0	Dell Inspiron 15	15
5	Accessories	1499.0	Boat Rockerz 450	100
6	Laptops	59999.0	HP Pavilion Laptop Updated	18

(6 rows, 3 ms)

Edit

- SWIGGY_ORDER
- INFORMATION_SCHEMA
- Users
- H2 2.4.240 (2025-09-22)

SELECT * FROM PRODUCT;

PRODUCT_ID	CATEGORY	PRICE	PRODUCT_NAME	QUANTITY
1	Electronics	79999.0	iPhone 15	25
2	Electronics	74999.0	Samsung Galaxy S24	30
3	Footwear	5999.0	Nike Air Max	50
5	Accessories	1499.0	Boat Rockerz 450	100
6	Laptops	59999.0	HP Pavilion Laptop Updated	18

(5 rows, 1 ms)

Edit

Entity -> Order

Place Order

The screenshot shows the Swagger UI interface for a REST API. The left sidebar displays a collection of endpoints under the 'SWIGGY_SYSTEM' namespace. The main panel is focused on the 'POST Place Order' endpoint, located at 'http://localhost:8088/orders/1/2/1'. The request body is defined in JSON format, containing customer and product details. The response status is '200 OK'.

```
POST http://localhost:8088/orders/1/2/1

{
  "customer": {
    "customerId": 1,
    "name": "Rahul Sharma",
    "email": "rahul.sharma@gmail.com",
    "city": "Pune",
    "age": 28,
    "bankAccountNumber": "123456789012",
    "pin": 1234
  },
  "orderId": 2,
  "product": {
    "category": "Electronics",
    "price": 74999.0,
    "productId": 2,
    "productName": "Samsung Galaxy S24",
    "quantity": 26
  },
  "quantity": 1,
  "totalPrice": 74999.0
}
```


Get All Orders

The screenshot shows the Swagger UI interface for a REST API. The left sidebar displays a collection of endpoints under the 'SWIGGY_SYSTEM' namespace. The main panel is focused on the 'GET Get All Orders' endpoint, located at 'http://localhost:8088/orders/all'. The response status is '200 OK'. The response body is a JSON array containing one order object, which includes customer and product details.


```
GET http://localhost:8088/orders/all

[
  {
    "customer": {
      "customerId": 1,
      "name": "Rahul Sharma",
      "email": "rahul.sharma@gmail.com",
      "city": "Pune",
      "age": 28,
      "bankAccountNumber": "123456789012",
      "pin": 1234
    },
    "orderId": 1,
    "product": {
      "category": "Electronics",
      "price": 74999.0,
      "productId": 2,
      "productName": "Samsung Galaxy S24",
      "quantity": 26
    },
    "quantity": 1,
    "totalPrice": 74999.0
  }
]
```


Get Order By ID

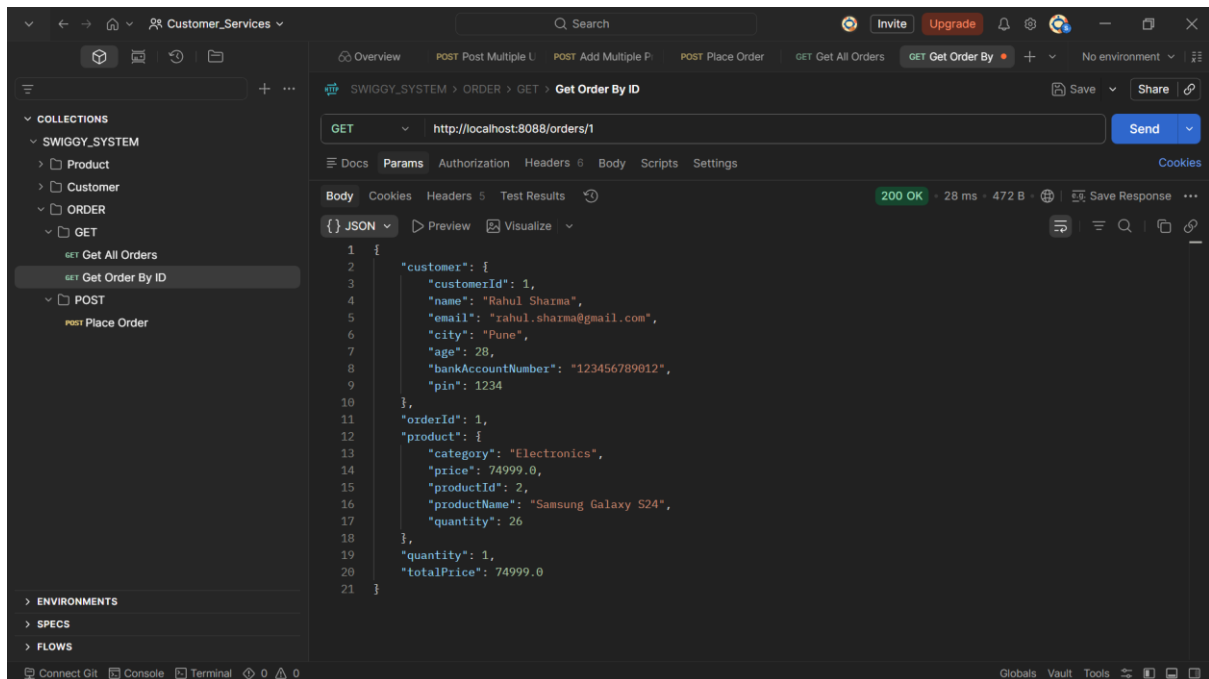


Delete Order By ID

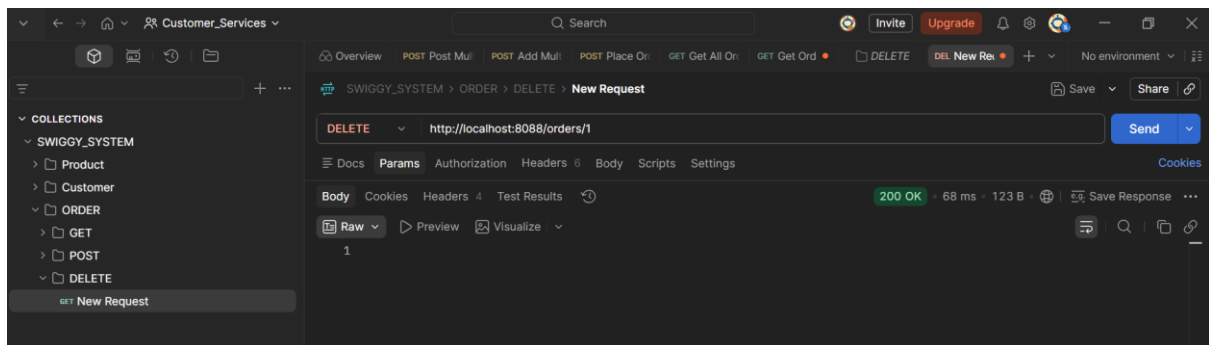


Get Revenue

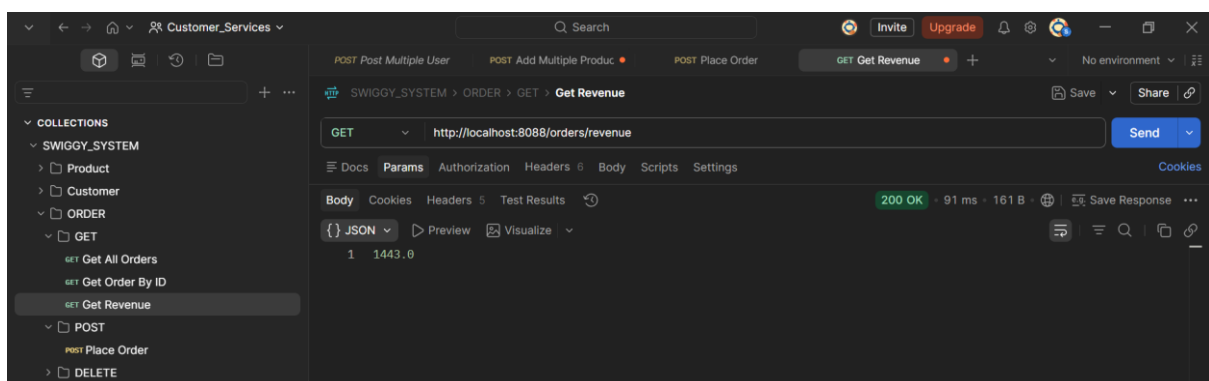

Get Count Of Order a User

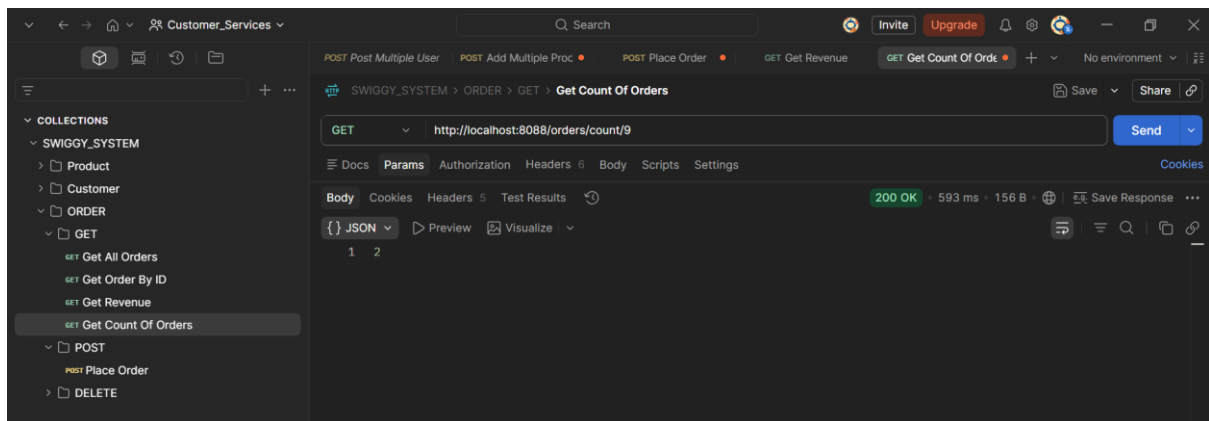

Get Total Amount of a Customer

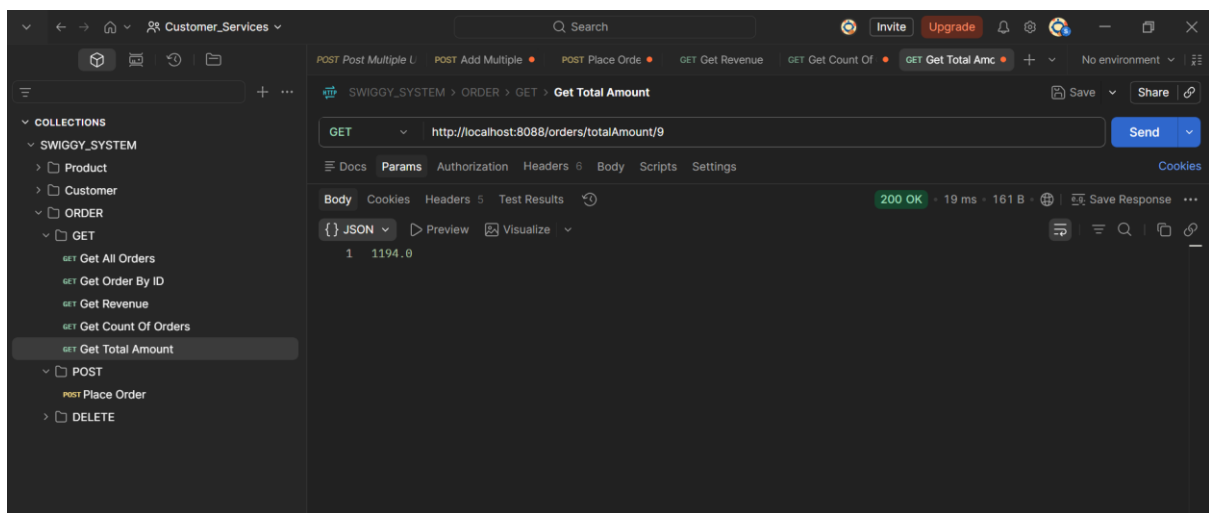

Get Customer By Product ID

