


Second-generation execution funnel: entering the runner is not API success

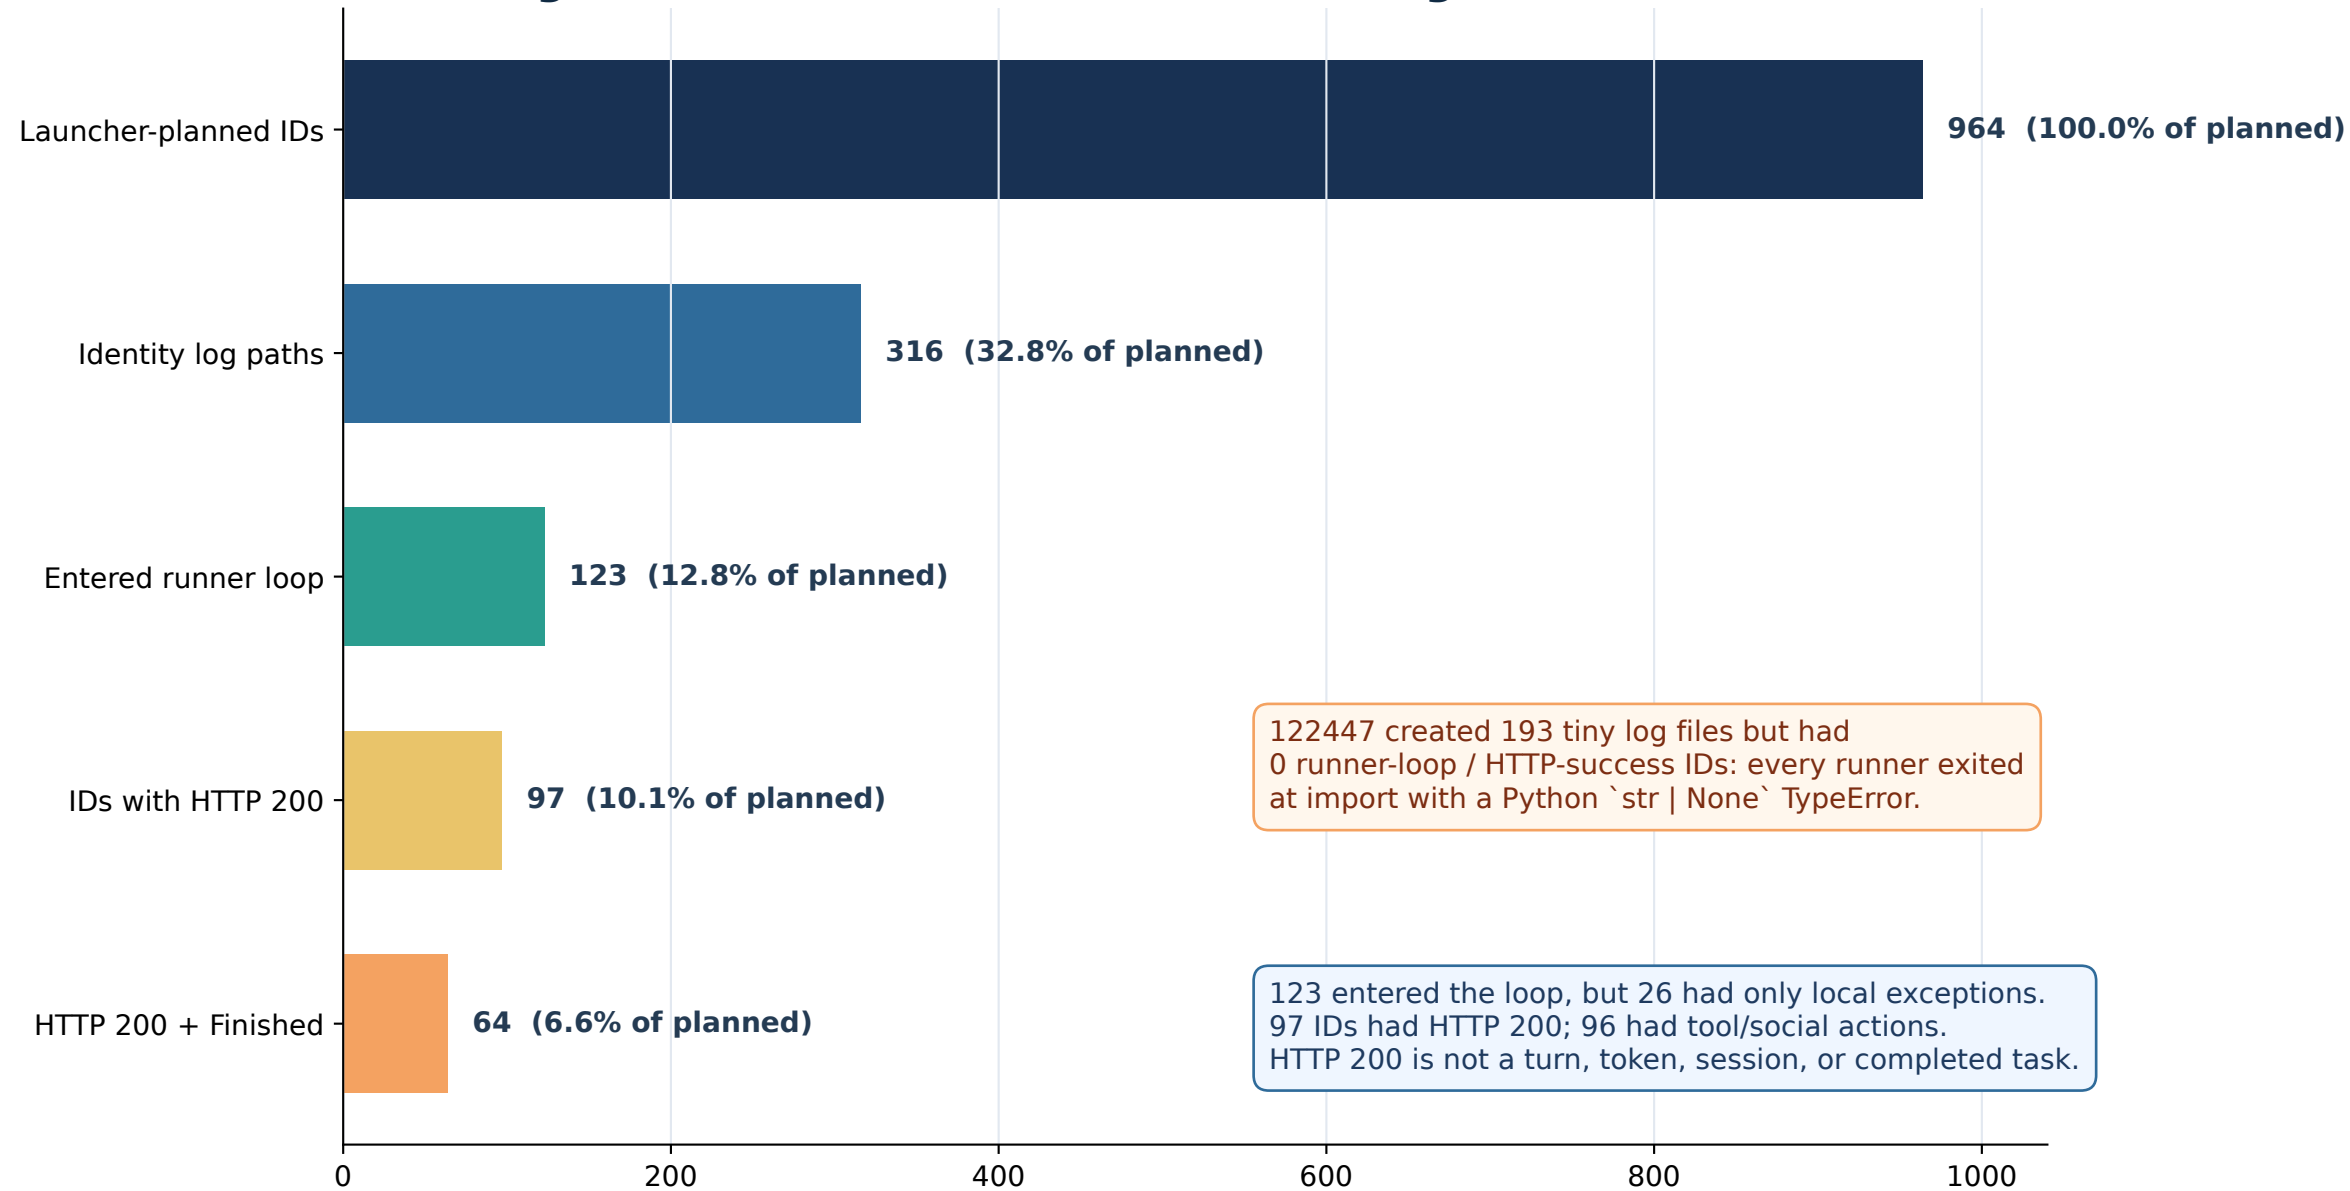

122447 created 193 tiny log files but had 0 runner-loop / HTTP-success IDs: every runner exited at import with a Python ``str | None`` TypeError.

123 entered the loop, but 26 had only local exceptions. 97 IDs had HTTP 200; 96 had tool/social actions. HTTP 200 is not a turn, token, session, or completed task.

Distinct logical identity labels / paths in the stable snapshot

Finished is not success: 79 Finished markers = 64 with HTTP 200 + 15 error-only loops; 33 HTTP-success IDs were unfinished. Stable fingerprint 6982fe49...b396b49f; O_TRUNC prevents exact session/concurrency recovery.