

Name:Swathi Sri R Register Number:250701769 Experiment Name:Experiment to understand EDA-Quantitative and Qualitative Analysis

```
import seaborn as sns
import pandas as pd
import numpy as np
import matplotlib.pyplot as plt
%matplotlib inline

tips = sns.load_dataset('tips')

print(tips.head())

sns.displot(tips['total_bill'], kde=True)
plt.show()

sns.displot(tips['total_bill'], kde=False)
plt.show()

sns.jointplot(x='tip', y='total_bill', data=tips)
plt.show()

sns.jointplot(x='tip', y='total_bill', data=tips, kind='reg')
plt.show()

sns.jointplot(x='tip', y='total_bill', data=tips, kind='hex')
plt.show()

sns.pairplot(tips)
plt.show()

print(tips['time'].value_counts())

sns.pairplot(tips, hue='time')
plt.show()

sns.pairplot(tips, hue='day')
plt.show()

sns.heatmap(tips.corr(numeric_only=True), annot=True)
plt.show()

sns.boxplot(y=tips['total_bill'])
plt.show()

sns.boxplot(y=tips['tip'])
plt.show()

sns.countplot(y=tips['day'])
plt.show()
```

```
sns.countplot(y=tips['sex'])
plt.show()


tips['sex'].value_counts().plot(kind='pie')
plt.show()


tips['sex'].value_counts().plot(kind='bar')
plt.show()


sns.countplot(x=tips['sex'])
plt.show()


sns.countplot(data=tips[tips['time'] == 'Dinner'], x='day')
plt.show()
```


	total_bill	tip	sex	smoker	day	time	size
0	16.99	1.01	Female	No	Sun	Dinner	2
1	10.34	1.66	Male	No	Sun	Dinner	3
2	21.01	3.50	Male	No	Sun	Dinner	3
3	23.68	3.31	Male	No	Sun	Dinner	2
4	24.59	3.61	Female	No	Sun	Dinner	4

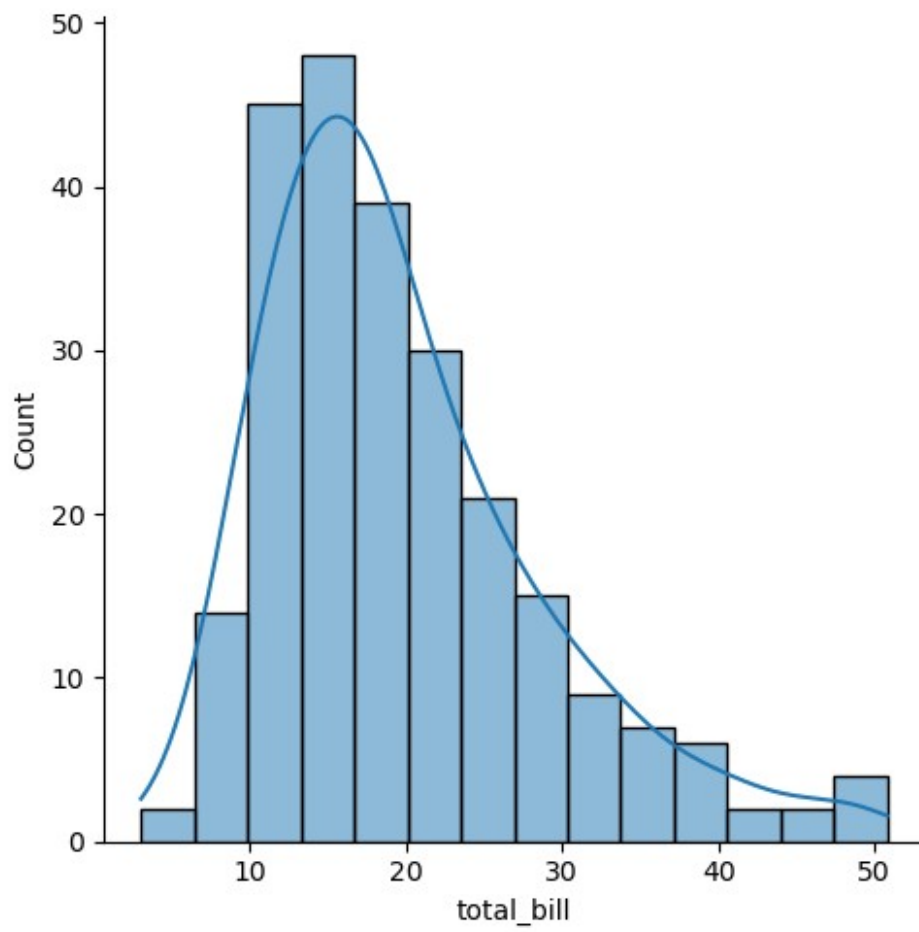


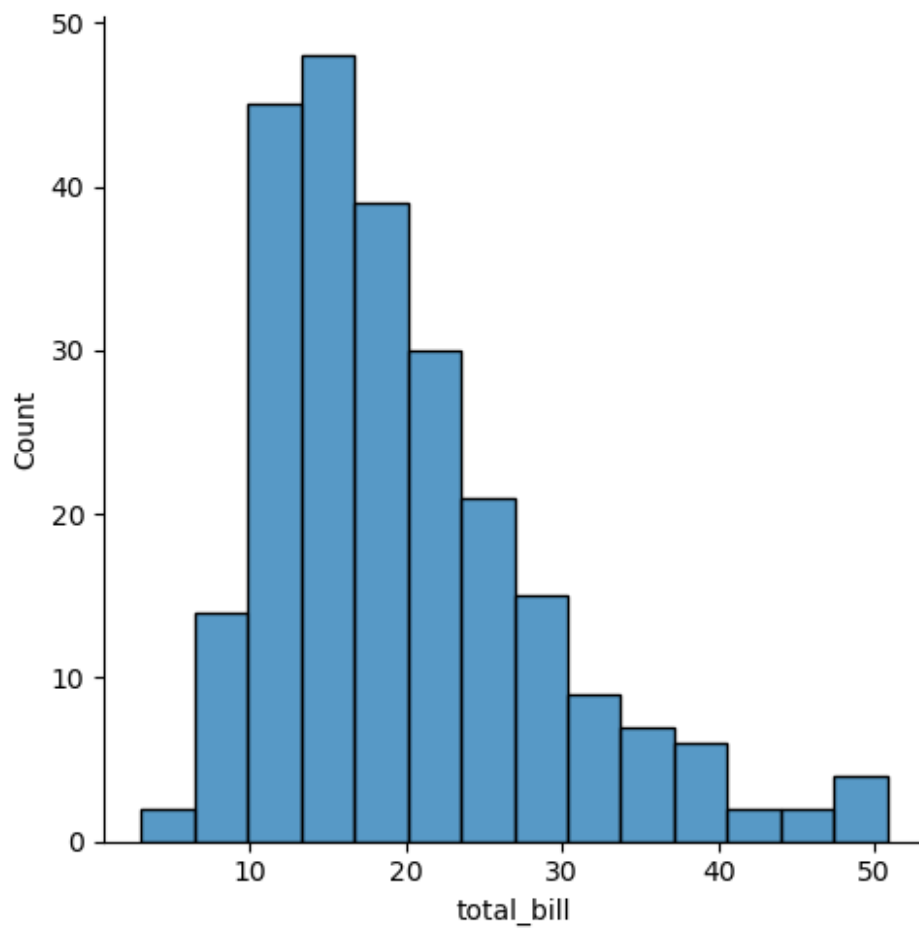

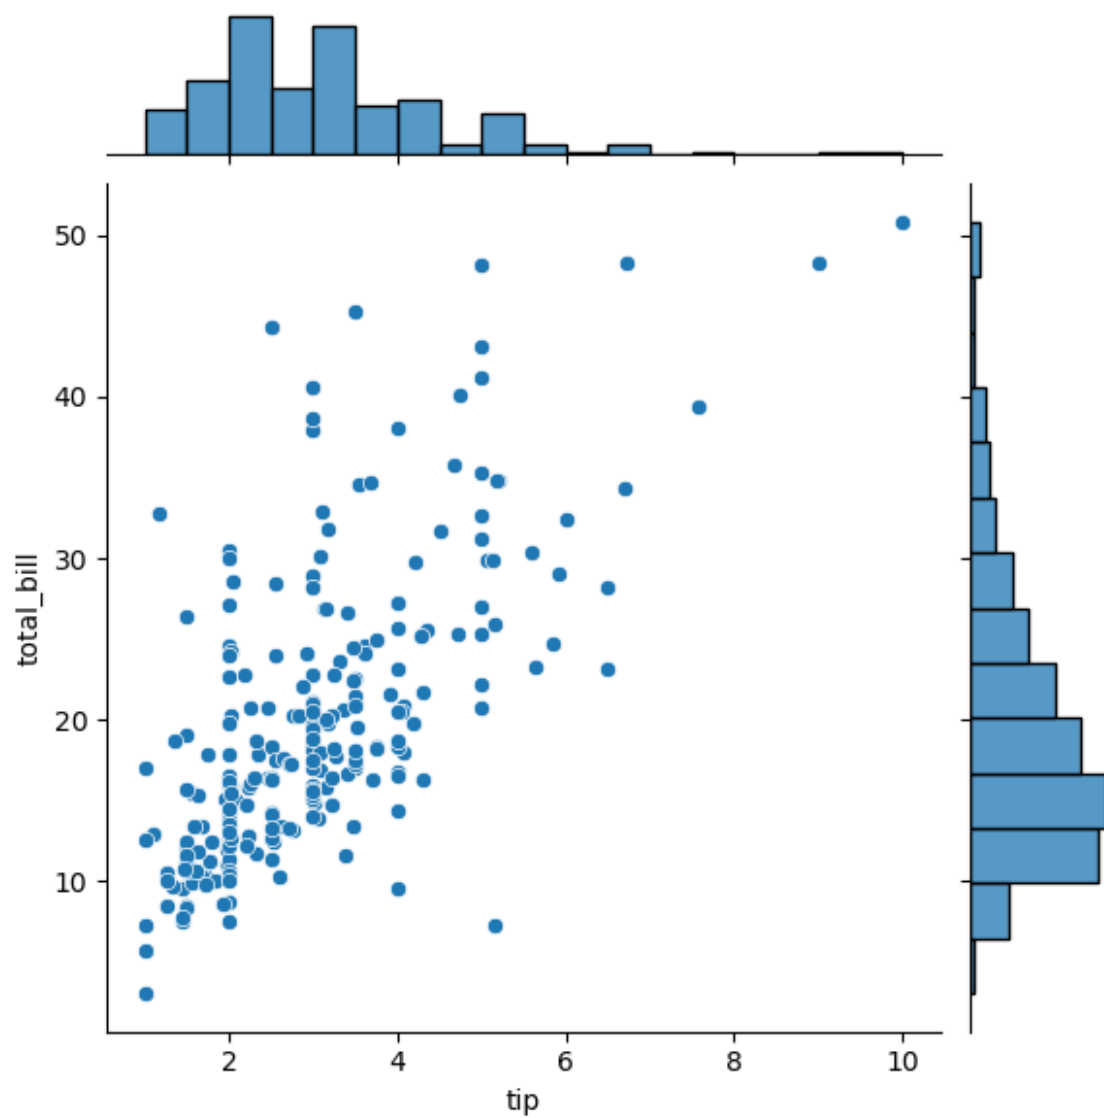

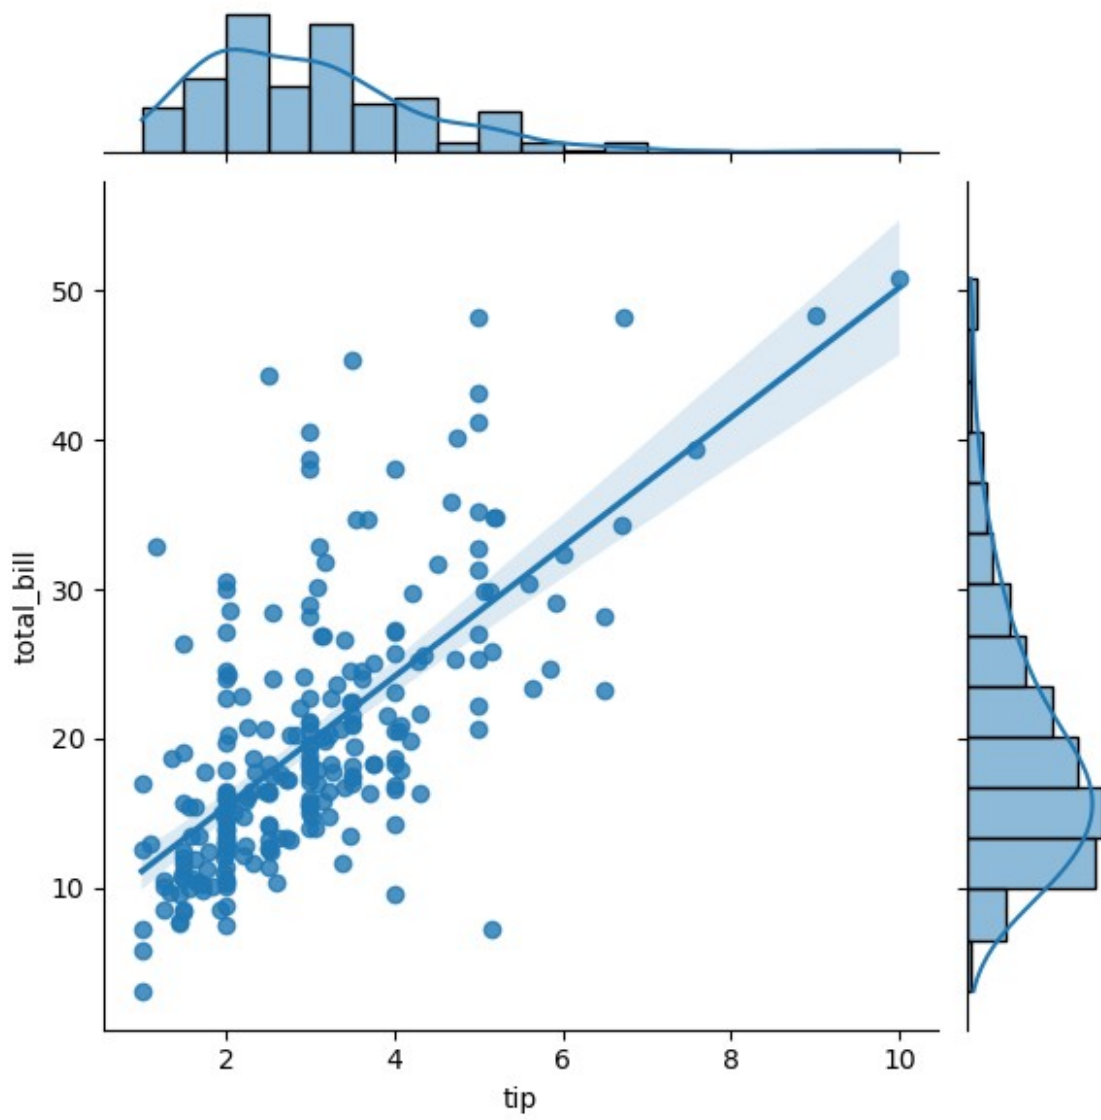

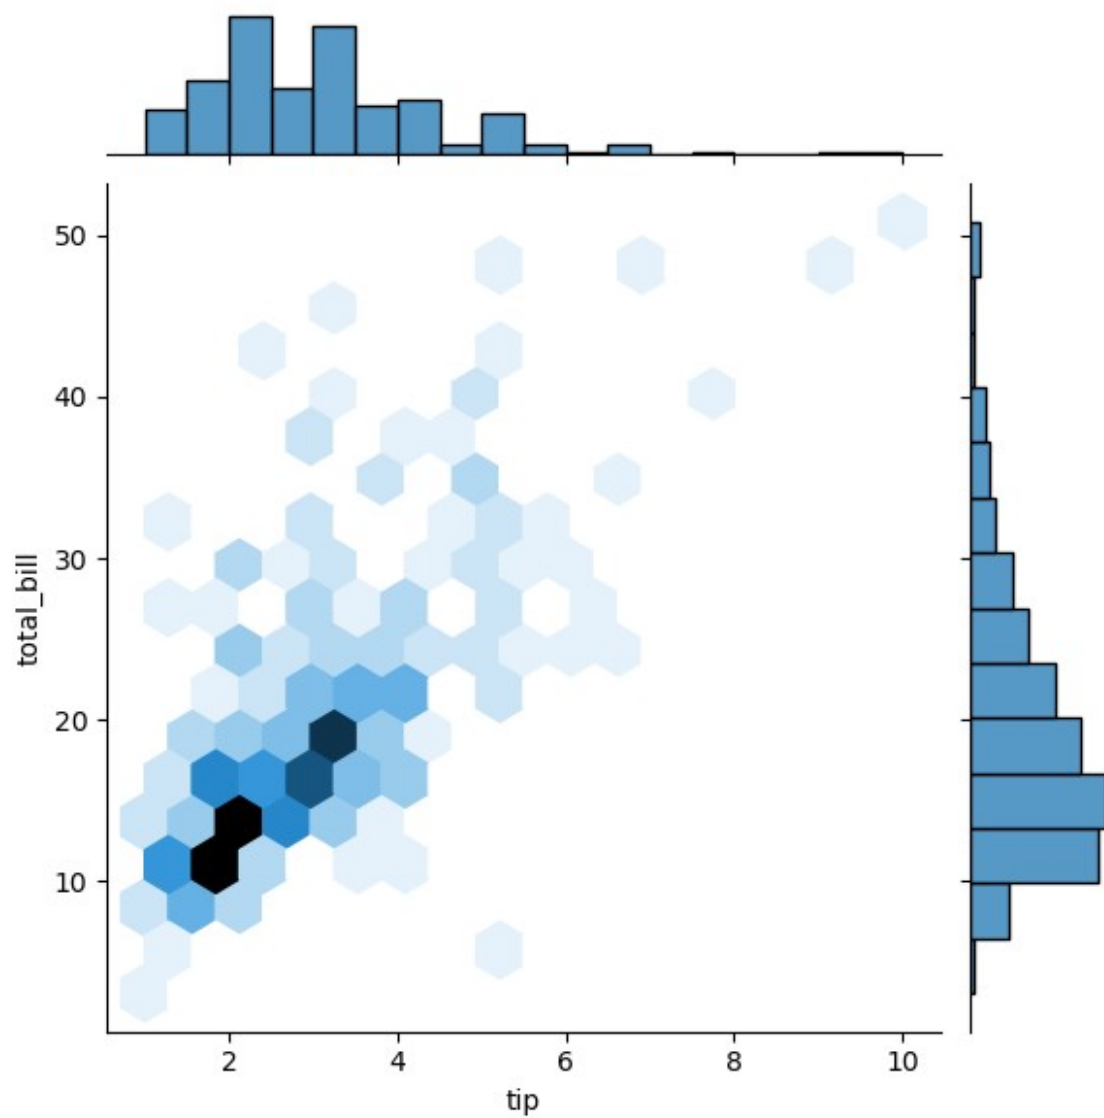

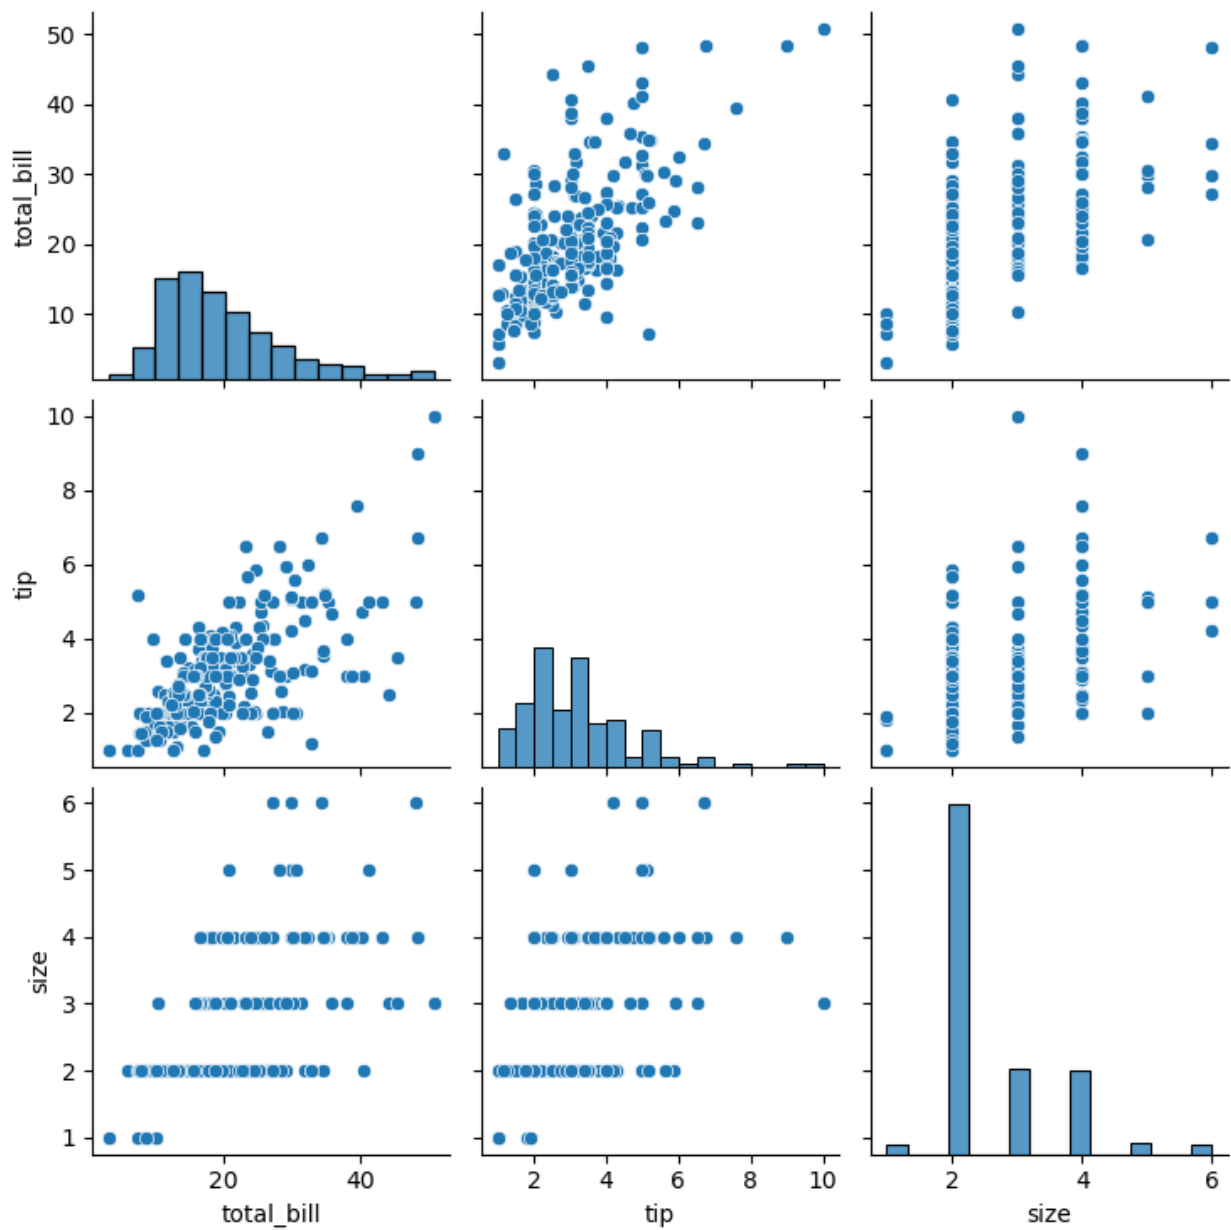

```
time
Dinner    176
Lunch      68
Name: count, dtype: int64
```

