PIZZA



"Hello, my name is swati shinde.Today, I want to take you through my Pizza Sales Performance Project, where I utilized structured SQL queries to translate raw transactional logs into strategic business insights for a restaurant chain."





DETERMINE THE TOP 3 MOST ORDERED PIZZA TYPES BASED ON REVENUE.

Result Grid | Filter Rows:

name	revenue
The Thai Chicken Pizza	43434.25
The Barbecue Chicken Pizza	42768
The California Chicken Pizza	41409.5



```sql
select pizza_types.name,
sum(orders_details.quantity * pizzas.price) as revenue
from pizza_types join pizzas
on pizzas.pizza_type_id = pizza_types.pizza_type_id
join orders_details
on orders_details.pizza_id = pizzas.pizza_id
group by pizza_types.name order by revenue desc limit 3
```



Salford & Co.

Menu Service Contact

DETERMINE THE DISTRIBUTION OF ORDERS BY HOUR OF THE DAY.



```
SELECT
    HOUR(order_time) AS hour, COUNT(order_id) AS order_count
FROM
    orders
GROUP BY HOUR(order_time);
```

Result Grid

hour	order_count
11	1231
12	2520
13	2455
14	1472
15	1468
16	1920



IDENTIFY THE MOST COMMON PIZZA SIZE ORDERED.




```sql
SELECT
    pizzas.size,
    COUNT(orders_details.order_details_id) AS order_count
FROM
    pizzas
        JOIN
    orders_details ON pizzas.pizza_id = orders_details.pizza_id
GROUP BY pizzas.size
ORDER BY order_count DESC;
```

Result Grid

size	order_count
L	18526
M	15385
S	14137
XL	544
XXL	28

DATA MODEL

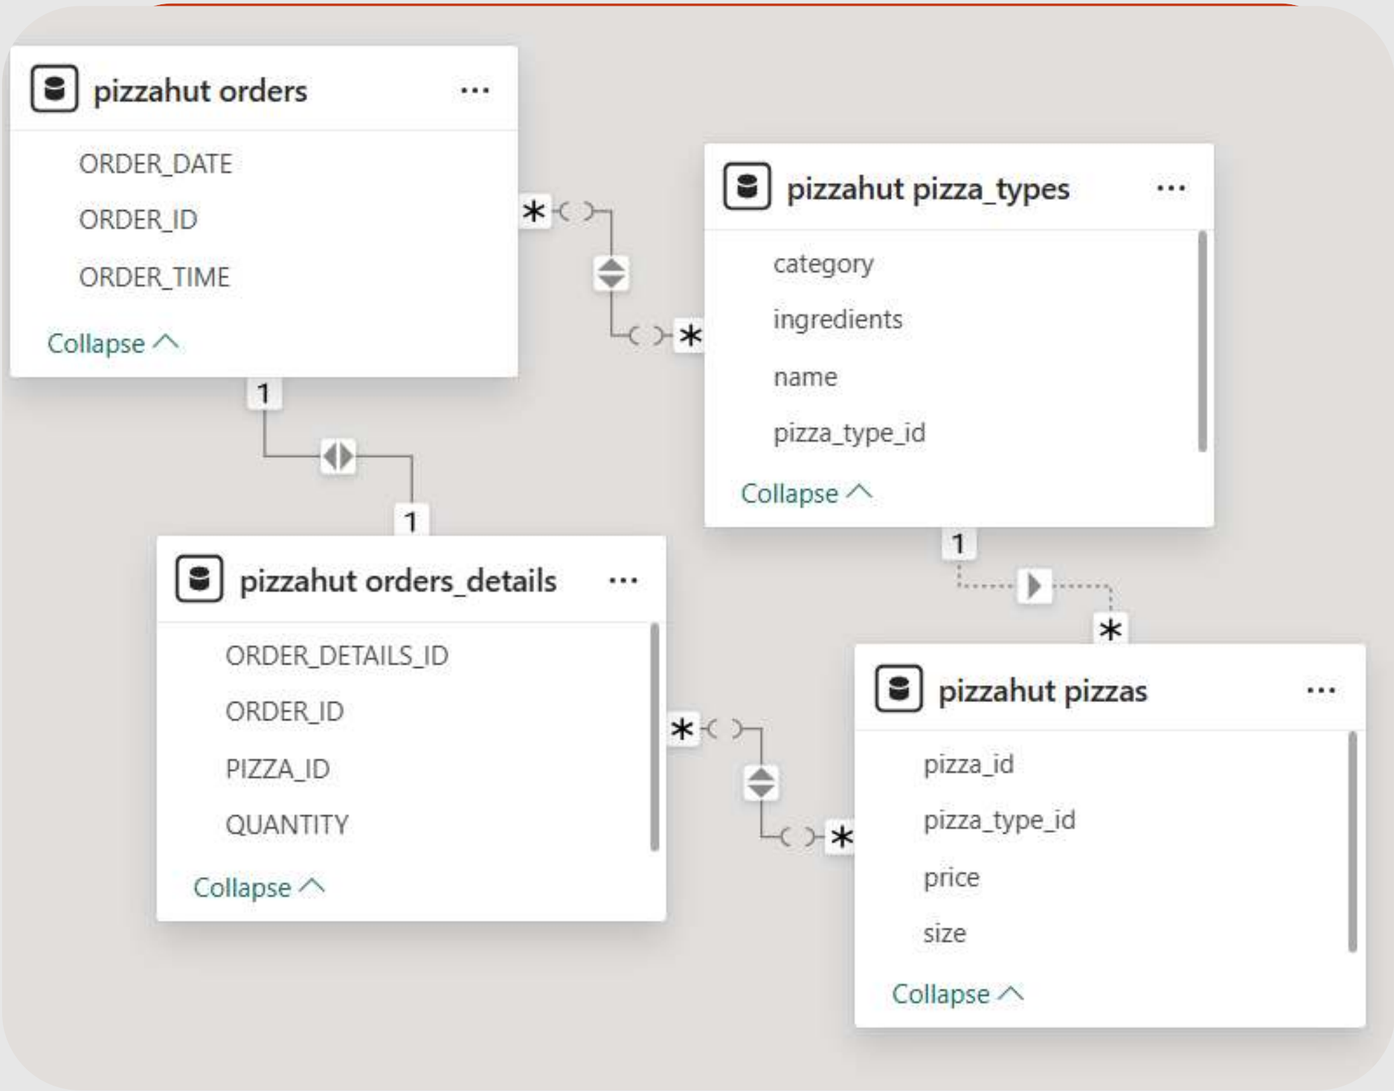


pizzahut orders
ORDER_DATE
ORDER_ID
ORDER_TIME
Collapse
pizzahut pizza_types
category
ingredients
name
pizza_type_id
Collapse
pizzahut orders_details
ORDER_DETAILS_ID
ORDER_ID
PIZZA_ID
QUANTITY
Collapse
pizzahut pizzas
pizza_id
pizza_type_id
price
size
Collapse
1
*

RETRIEVE THE TOTAL NUMBER OF ORDERS PLACED.

```
SELECT
    COUNT(ORDER_ID) AS TOTAL_ORDERS
FROM
    ORDERS;
```



Result Grid

	TOTAL_ORDERS
▶	21350



Salford & Co.

LIST THE TOP 5 MOST ORDERED PIZZA TYPES ALONG WITH THEIR QUANTITIES. DAY.







```sql
SELECT
    pizza_types.name, SUM(orders_details.quantity) AS quantity
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
    orders_details ON orders_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY quantity DESC
LIMIT 5;
```

Result Grid | Filter Rows:

name	quantity
The Classic Deluxe Pizza	2453
The Barbecue Chicken Pizza	2432
The Hawaiian Pizza	2422
The Pepperoni Pizza	2418
The Thai Chicken Pizza	2371

Salford & Co.

GROUP THE ORDERS BY DATE AND CALCULATE THE AVERAGE NUMBER OF PIZZAS ORDERED PER DAY.







```sql
SELECT
    ROUND(AVG(quantity), 0) AS avg_pizza_orderd_per_day
FROM
    (SELECT
        orders.order_date, SUM(orders_details.quantity) AS quantity
    FROM
        orders
    JOIN orders_details ON orders.order_id = orders_details.order_id
    GROUP BY orders.order_date) AS order_quantity;
```

Result Grid | Filter Rows


avg_pizza_orderd_per_day
138



CALCULATE THE TOTAL REVENUE GENERATED FROM PIZZA SALES.

Result Grid

	TOTAL_SALES
▶	817860.05

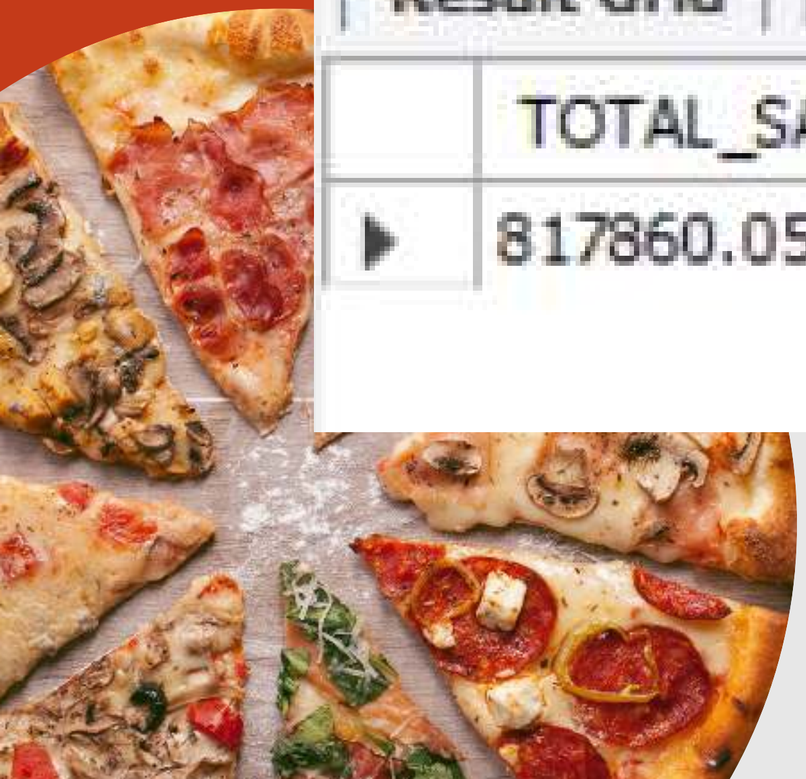

```
SELECT
    ROUND(SUM(ORDERS_DETAILS.QUANTITY * PIZZAS.PRICE),
        2) AS TOTAL_SALES
FROM
    ORDERS_DETAILS
        JOIN
    PIZZAS ON PIZZAS.PIZZA_ID = ORDERS_DETAILS.PIZZA_ID
    order by pizzas.price desc limit 1;
```

THANK YOU



