

Practical -1

Aim: Create a form using HTML and include external CSS like

- Text Shadows,
- Rounded corners,
- Color,
- Box Shadows,
- Linear Gradients,
- Radial Gradients,
- Multiple background Images.

Program:

Login form---

- **.html file:**

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Form</title>
  <link rel="stylesheet" href="FENIL_form.css">
</head>
<body>
  <form class="styled-form">
    <h1 align="center">Login Form</h1>
    <input type="email" placeholder="Your Email" required>
    <input type="password" placeholder="Strong Password" required>
    <button type="submit">Login</button>
  </form>
</body>
</html>
```

- **.css file:**

```
body {
  background-image: radial-gradient(circle, yellow, rgb(15, 235, 15));
}


h1 {
  text-shadow: 5px 6px 3px white;
}
```

```
.styled-form {
  background-image: linear-gradient(to top ,#06b1e6, blue, #06b1e6);
  border-radius: 15px;
  box-shadow: 0 6px 20px 0 black, 2px 6px 20px 0 black;
  padding: 10px;
  max-width: 400px;
  margin: 0;
  position: absolute;
  top: 25%;
  left: 35%;
}

input {
  width: 100%;
  padding: 10px;
  margin: 10px;
  max-width: 90%;
  border-radius: 8px;
  border: 2px solid #ccc;
  box-shadow: inset 1px 1px 5px rgba(0, 0, 0, 0.1);
}

input::placeholder {
  color: #888;
  text-shadow: 1px 1px 1px rgba(255,255,255,0.5);
}

button {
  background-color: #f5f0f0;
  color: black;
  padding: 10px;
  border: none;
  border-radius: 8px;
  cursor: pointer;
  display: block;
  margin: auto;
  box-shadow: 0 4px 10px 0 black, 0 4px 10px 0 black;
}
```

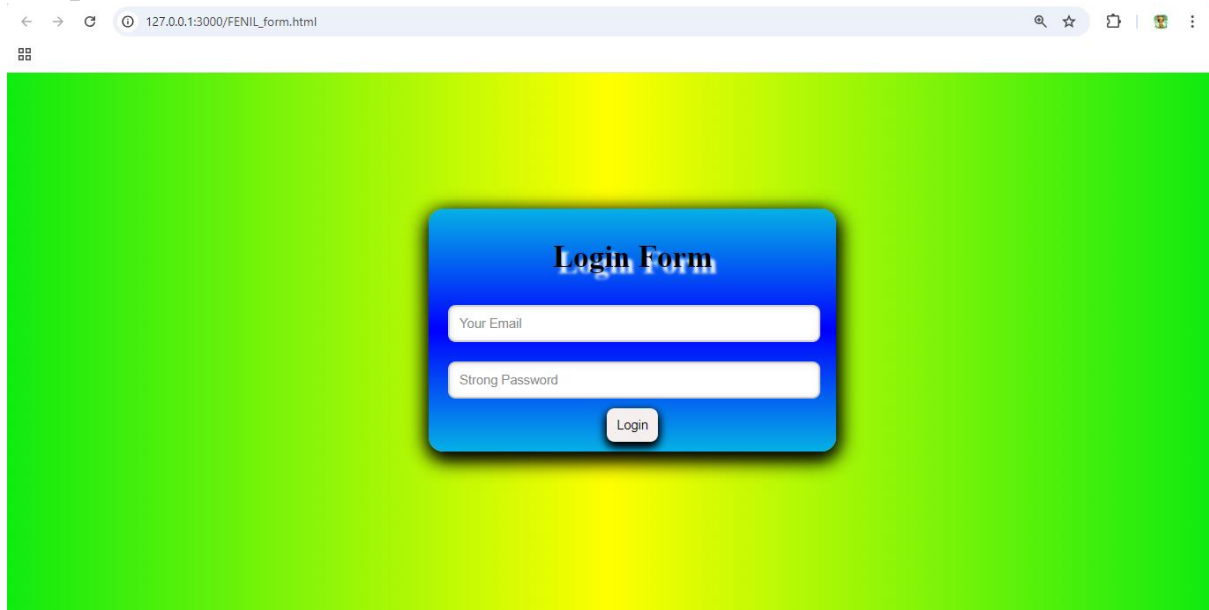Output:**Multiple image background---**


```

<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Multiple Image</title>
  <style>
    #img {
      background-image: url(/ss.png), url(/bg.png);
      background-position: right bottom, left top;
      background-repeat: no-repeat, repeat;
      padding: 15px;
      height: 550px;
    }
  </style>
</head>
<body>
  <h1>Multiple background image</h1>
  <div id="img">
    <h4>One Image overlap other</h4>
    <p>Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed diam nonummy nibh
      euismod tincidunt ut laoreet dolore magna aliquam erat volutpat.</p>
    <p>Ut wisi enim ad minim veniam, quis nostrud exerci tation ullamcorper suscipit
      lobortis nisl ut aliquip ex ea commodo consequat.</p>
  </div>

```

```
</div>  
</body>  
</html>
```

Output:

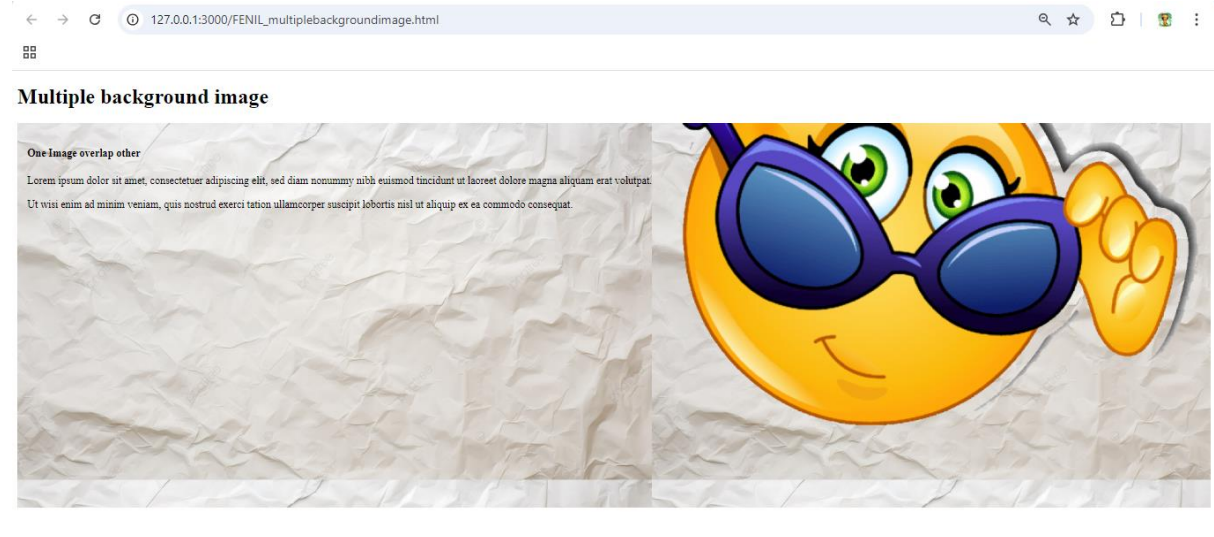


Practical -2

Aim: Write a program for all Math Objects in JavaScript.


Program:

```
<html>
  <head>
    <title>Math Objects</title>
  </head>
  <body>
    <h1>Math Objects in JavaScripts :</h1>
    <p id="demo"></p>
    <script>
      document.getElementById("demo").innerHTML = Math.round(23.7);
      document.getElementById("demo").innerHTML = Math.ceil(16.1); //Math.ceil()
      document.getElementById("demo").innerHTML = Math.floor(2.1); //Math.floor()
      document.getElementById("demo").innerHTML = Math.pow(50,3); //Math.pow()
      document.getElementById("demo").innerHTML = Math.sqrt(900); //Math.sqrt()
      document.getElementById("demo").innerHTML = Math.abs(-17.6); //Math.abs()
      document.getElementById("demo").innerHTML = Math.min(17,2,-69,24,99,-24);
//Math.min()
      document.getElementById("demo").innerHTML = Math.max(1,76,62,96,-1,18);
//Math.max()
    </script>
  </body>
</html>
```

Output:



Math Objects in JavaScripts



Math Objects in JavaScripts

17

← → ↻ ⓘ 127.0.0.1:3000/FENIL_math.html



Math Objects in JavaScripts

2

← → ↻ ⓘ 127.0.0.1:3000/FENIL_math.html



Math Objects in JavaScripts

125000

← → ↻ ⓘ 127.0.0.1:3000/FENIL_math.html



Math Objects in JavaScripts

30

← → ↻ ⓘ 127.0.0.1:3000/FENIL_math.html



Math Objects in JavaScripts

17.6

← → ↻ ⓘ 127.0.0.1:3000/FENIL_math.html



Math Objects in JavaScripts

-69

← → ↻ ⓘ 127.0.0.1:3000/FENIL_math.html



Math Objects in JavaScripts

96

Practical - 3

Aim: Write a program for all String Objects in JavaScript.

Program:

```
<html>
  <head>
    <title>String Objects</title>
  </head>
  <body>
    <h1>String Objects in JavaScripts</h1>
    <p id="demo"></p>
    <script>
      //Quotes
      let text = "Advanced Web Designing";
      document.getElementById("demo").innerHTML = text;
      //String Length
      let d = "ABCDE FGHIJKLMNOPQR STUVWXYZ";
      document.getElementById("demo").innerHTML = d.length;
      //Combination of Double and Single Quotes
      let a = "Hello";
      let b = "Good 'Morning'";
      let c = 'My Name is "Fenil"';
      document.getElementById("demo").innerHTML = a + "<br>" + b + "<br>" + c;
    </script>
  </body>
</html>
```

Output:



String Objects in JavaScripts

Advanced Web Designing



String Objects in JavaScripts

28



String Objects in JavaScripts

Hello

Good 'Morning'

My Name is "Fenil"

Practical - 4

Aim: Write a program for all the Date Object in JavaScript.

Program:

```
<html>
  <head>
    <title>Date Objects</title>
  </head>
  <body>
    <h1>Date Objects in JavaScripts</h1>
    <p id="demo"></p>
    <script>
      //new Date() without arguments
      const e = new Date();
      document.getElementById("demo").innerHTML = e;
      //Using new Date(7 numbers)
      const d = new Date(2004, 9, 24, 10, 24, 17, 0);
      document.getElementById("demo").innerHTML = d;
      //6 numbers specify year, month, day, hour, minute and second
      const d = new Date(2018, 9, 24, 10, 33, 30);
      document.getElementById("demo").innerHTML = d;
      //Previous Century
      const d = new Date(99, 11, 24);
      document.getElementById("demo").innerHTML = d;
      //new Date(milliseconds)
      const d = new Date(1000000000000);
      document.getElementById("demo").innerHTML = d;
    </script>
  </body>
</html>
```

Output:

← → ↻ ⓘ 127.0.0.1:3000/FENIL_date.html



Date Objects in JavaScripts

Tue Oct 22 2024 02:02:17 GMT+0530 (India Standard Time)

← → ↻ ⓘ 127.0.0.1:3000/FENIL_date.html



Date Objects in JavaScripts

Sun Oct 24 2004 10:24:17 GMT+0530 (India Standard Time)

← → ↻ ⓘ 127.0.0.1:3000/FENIL_date.html



Date Objects in JavaScripts

Wed Oct 24 2018 10:33:30 GMT+0530 (India Standard Time)

← → ↻ ⓘ 127.0.0.1:3000/FENIL_date.html



Date Objects in JavaScripts

Fri Dec 24 1999 00:00:00 GMT+0530 (India Standard Time)

← → ↻ ⓘ 127.0.0.1:3000/FENIL_date.html



Date Objects in JavaScripts

Sat Mar 03 1973 15:16:40 GMT+0530 (India Standard Time)


Practical - 5

Aim: Write a program for all Boolean objects in JavaScript.

Program:


```
<html>
  <head>
    <title>Boolean Objects</title>
  </head>
  <body>
    <h1>Boolean Objects in JavaScripts</h1>
    <p id="demo"></p>
    <script>
      //The Boolean for greater than
      document.getElementById("demo").innerHTML = Boolean(24 > 17);
      //The Boolean value of 0 (zero) is false
      let x = 0;
      document.getElementById("demo").innerHTML = Boolean(x);
      //The Boolean value of null is false
      let x = null;
      document.getElementById("demo").innerHTML = Boolean(x);
    </script>
  </body>
</html>
```

Output:




Boolean Objects in JavaScripts

true



Boolean Objects in JavaScripts

false



Boolean Objects in JavaScripts

false

Practical - 6

Aim: Write a program for all Number object in JavaScript.

Program:

```
<html>
  <head>
    <title>Number Objects</title>
  </head>
  <body>
    <h1>Number Objects in JavaScript</h1>
    <p id="demo"></p>
    <script>
      //Scientific Exponent
      let x = 123e5;
      let y = 123e-5;
      document.getElementById("demo").innerHTML = x + "<br>" + y;
      //Integer Precision
      let x = 9999999999999999;
      let y = 9999999999999999;
      document.getElementById("demo").innerHTML = x + "<br>" + y;
      //Add two numbers
      let x = 2;
      let y = 17;
      let z = x + y;
      document.getElementById("demo").innerHTML = z;
      //Add two strings
      let x = "17";
      let y = "2";
      let z = x + y;
      document.getElementById("demo").innerHTML = z;
      //A common mistake is to expect this result to be 30
      var x = 70;
      var y = 50;
      document.getElementById("demo").innerHTML = "The result is: " + x + y;
      //Not a Number(NaN)
      document.getElementById("demo").innerHTML = 100 / "Fenil";
    </script>
  </body>
</html>
```

Output:
**Number Objects in JavaScript**

24
17

**Number Objects in JavaScript**

12300000
0.00123

**Number Objects in JavaScript**

9999999999999999
10000000000000000

**Number Objects in JavaScript**

19

← → ↻ ⓘ 127.0.0.1:3000/FENIL_number.html



Number Objects in JavaScript

172

← → ↻ ⓘ 127.0.0.1:3000/FENIL_number.html



Number Objects in JavaScript

The result is: 7050

← → ↻ ⓘ 127.0.0.1:3000/FENIL_number.html



Number Objects in JavaScript

NaN


Practical - 7

Aim: Write a JavaScript to get element by its ID.

Program:

```
<html>
<head>
  <title>Element by ID</title>
</head>
<body>
  <p id="intro">Finding HTML element by ID</p>
  <p>This example demonstrates the<b>getElementById</b>method.</p>
  <p id="demo"></p>
<script>
  const element = document.getElementById("intro");
  document.getElementById("demo").innerHTML="The text from the intro paragraph is: " +
  element.innerHTML;
</script>
</body>
</html>
```

Output:

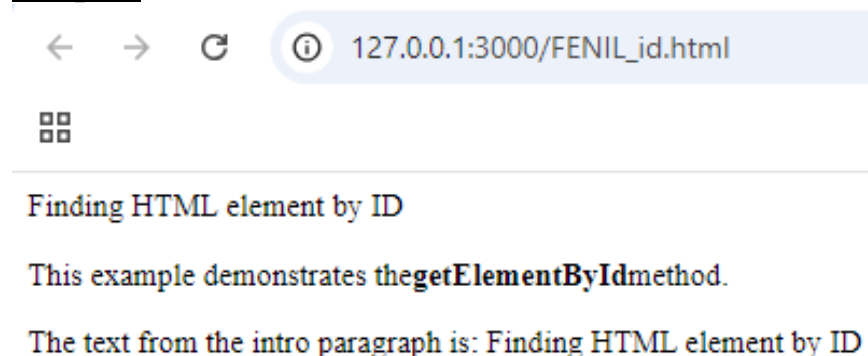


Practical - 8

Aim: Write a JavaScript to get element by its Tag Name.

Program:

```
<html>
<head>
  <title>Element by ID</title>
</head>
<body>
  <p>Finding HTML element by TagName</p>
  <p>This example demonstrates the<b>getElementByTagName</b>method.</p>
  <p id="demo"></p>
  <script>
    const element = document.getElementsByTagName("p");
    document.getElementById("demo").innerHTML="The text from the first
paragraph (index 0) is : "+ element[0].innerHTML;
  </script>
</body>
</html>
```

Output:

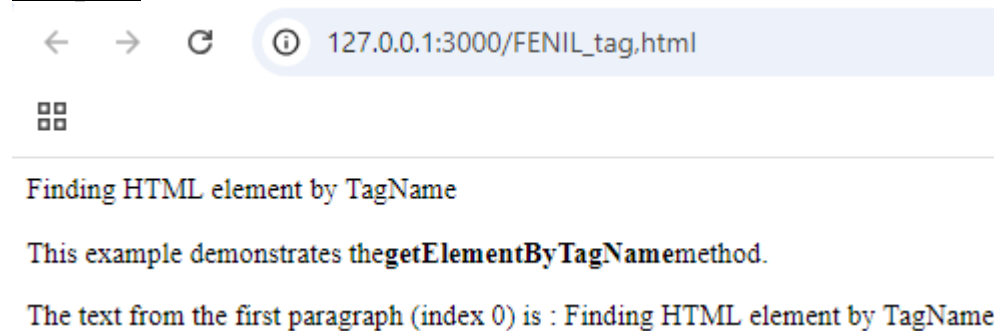

Practical - 9

Aim: Write a JavaScript to get element by its Class Name.


Program:

```
<html>
<head>
  <title>Element by ClassName</title>
</head>
<body>
  <div class="text">ASP.NET</div>
  <div class="text">CONM</div>
  <div class="text">SE</div>
  <div class="text">DBMS</div>
  <div class="text">AWD</div>

  <div id="output">The length of the collection is : </div>

  <script>
    const divs = document.getElementsByClassName("text");
    document.getElementById("output").innerHTML += " "+divs.length;
  </script>
</body>
</html>
```

Output:

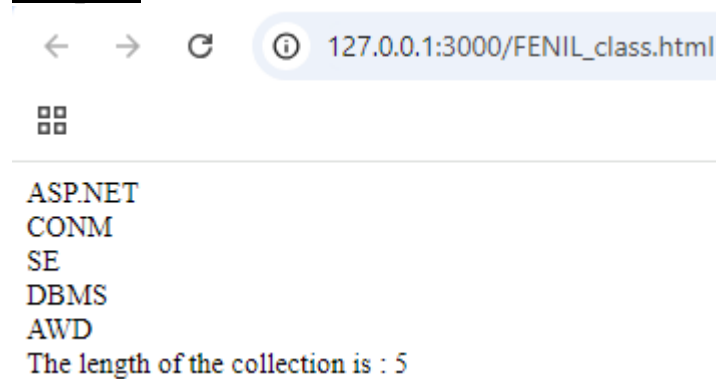

Practical - 10


Aim: Write a JavaScript using a Timer and Dynamic Styles to create Animated Effect.

Program:

```
<html>
<head>
  <title>JS Animation</title>
<style>
#myContainer {
  width: 400px;
  height: 400px;
  position: relative;
  background: blue;
}
#myAnimation {
  width: 50px;
  height: 50px;
  position: absolute;
  background-color: green;
}
</style>
<body>
<h1>JavaScript Animation</h1>
<p>
<button onclick="myMove()">Click Me</button>
</p>
<div id="myContainer">
<div id="myAnimation"></div>
</div>
<script>
var id = null;
function myMove() {
  var elem = document.getElementById("myAnimation");
  var pos = 0;
  clearInterval(id);
  id = setInterval(frame, 10);
  function frame() {
    if (pos == 350) {
      clearInterval(id);
    } else {
      pos++;
      elem.style.top = pos + 'px';
    }
  }
}
```


```
    elem.style.left = pos + 'px';  
  }  
}  
}  
</script>  
</body>  
</html>
```

Output:




JavaScript Animation

Click Me



JavaScript Animation

Click Me




Practical - 11

Aim: Write a JavaScript to change heading and paragraph color dynamically.

Program:

```
<html>
  <head>
    <title>Change color Dynamically</title>
  </head>
  <body>
    <h1>DOM Style Color Property :</h1>
    <h2 id="myH2">This is an example of h2</h2>
    <p id="myP">This is an example paragraph.</p>
    <button type="button" onclick="myFunction()">Set text color</button>
    <script>
      function myFunction() {
        document.getElementById("myH2").style.color = "yellow";
        document.getElementById("myP").style.color = "green";
      }
    </script>
  </body>
</html>
```

Output:




DOM Style Color Property :

This is an example of h2

This is an example paragraph.

Set text color



DOM Style Color Property :

This is an example of h2

This is an example paragraph.

Set text color


Practical - 12

Aim: Write a JavaScript to get alert when page is loaded successfully.

Program:

```
<html>
  <head>Javascript Events</head>
  <br>
  <body onload="window.alert('Page successfully loaded');">
    <script>
      document.write("The page is loaded successfully");
    </script>
  </body>
</html>
```

Output:

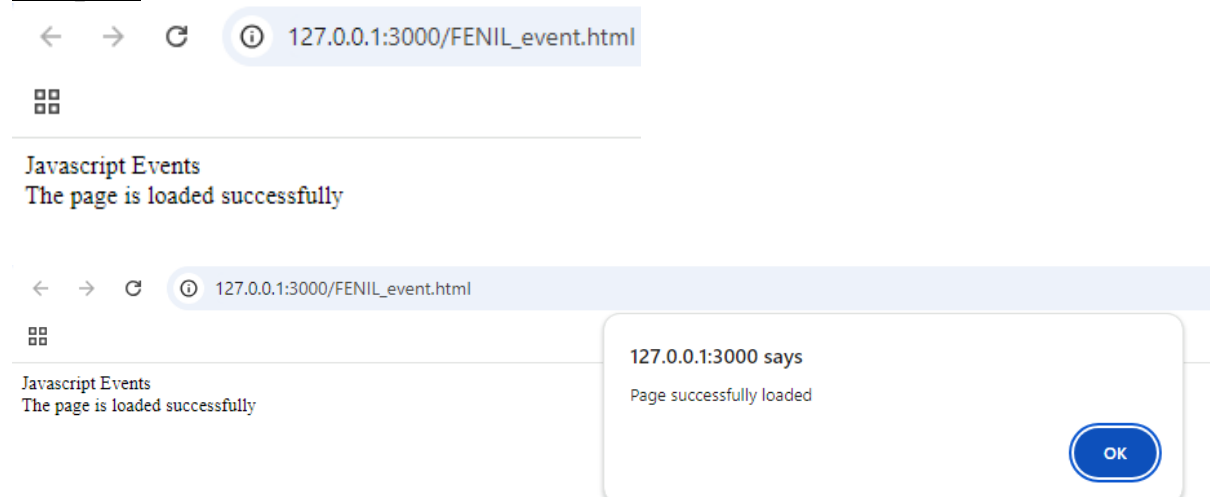


Practical - 13

Aim: Write a JavaScript for mouse down event.

Program:

```
<html>
<body>
<head>
<title>onmousedown()</title>
<h1>HTML DOM Events</h1>
<h2>The onmousedown Event</h2>
<p>Click the text below!</p>
<p id="myP" onmousedown="mouseDown()">The mouseDown() function sets the color of
this text to blue.</p>
<script>
function mouseDown() {
    document.getElementById("myP").style.color = "blue";
}
</script>
</body>
</html>
```

Output:




HTML DOM Events

The onmousedown Event

Click the text below!

The mouseDown() function sets the color of this text to blue.



HTML DOM Events

The onmousedown Event

Click the text below!

The mouseDown() function sets the color of this text to blue.


Practical - 14

Aim: Write a JavaScript for mouse over and out event.

Program:

```
<html>
<body>
<h1>HTML DOM Events</h1>
<h2>The onmouseover Event</h2>
<p>Assign an "onmouseover" and "onmouseout" event to a h1 element.</p>
<p>onmouseover color is blue and onmouseout color is red</p>
<h1 id="demo" onmouseover="mouseOver()" onmouseout="mouseOut()">Mouse over
me</h1>
<script>
function mouseOver() {
    document.getElementById("demo").style.color = "blue";
}
function mouseOut() {
    document.getElementById("demo").style.color = "red";
}
</script>
</body>
</html>
```

Output:




HTML DOM Events

The onmouseover Event

Assign an "onmouseover" and "onmouseout" event to a h1 element.

onmouseover color is blue and onmouseout color is red

Mouse over me



HTML DOM Events

The onmouseover Event

Assign an "onmouseover" and "onmouseout" event to a h1 element.

onmouseover color is blue and onmouseout color is red

Mouse over me


Practical - 15

Aim: Write a JavaScript for focus and blur event.

Program:

```
<html>
<body>
<h1>HTML DOM Events</h1>
<h2>The focus and blur Event</h2>
Enter your name: <input type="text" onfocus="FocusFunction(this)"
onblur="BlurFunction(this)">
<p>When the input field gets focus, a function changes the background-color to yellow.</p>
<p>When the input field gets out of focus(blur), a function changes the background-color to
red.</p>
<script>
function FocusFunction(x) {
  x.style.background = "yellow";
}
function BlurFunction(x) {
  x.style.background = "red";
}
</script>
</body>
</html>
```

Output:

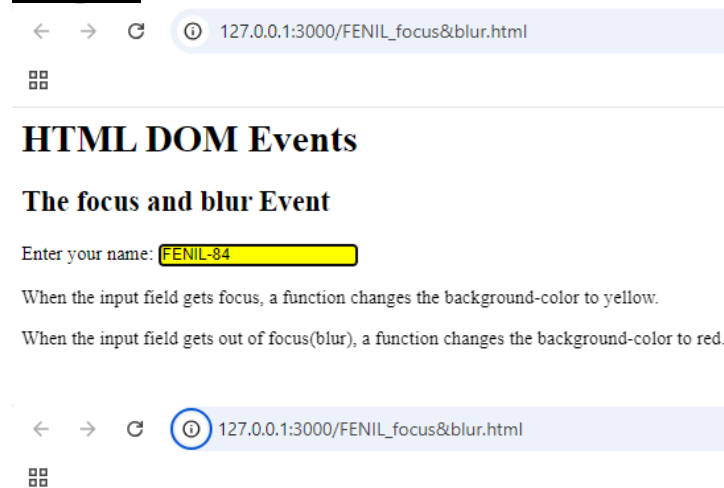

HTML DOM Events

The focus and blur Event

Enter your name: FENIL-84

When the input field gets focus, a function changes the background-color to yellow.

When the input field gets out of focus(blur), a function changes the background-color to red.


Practical - 16

Aim: Write a JavaScript for event bubbling between parent and child class.

Program:

```
<html>
<head>
  <title>Bubbling Event in Javascript</title>
</head>
<body>
  <h2>Bubbling Event in Javascript</h2>
  <div id="parent">
    <button>
      <h2>Parent</h2>
    </button>
    <button id="child">
      <p>Child</p>
    </button>
  </div><br>
  <script>
    document.getElementById(
      "child").addEventListener("click", function () {
        alert("You clicked the Child element!");
      }, false);
    document.getElementById(
      "parent").addEventListener("click", function () {
        alert("You clicked the parent element!");
      }, false);
  </script>
</body>
</html>
```

Output:

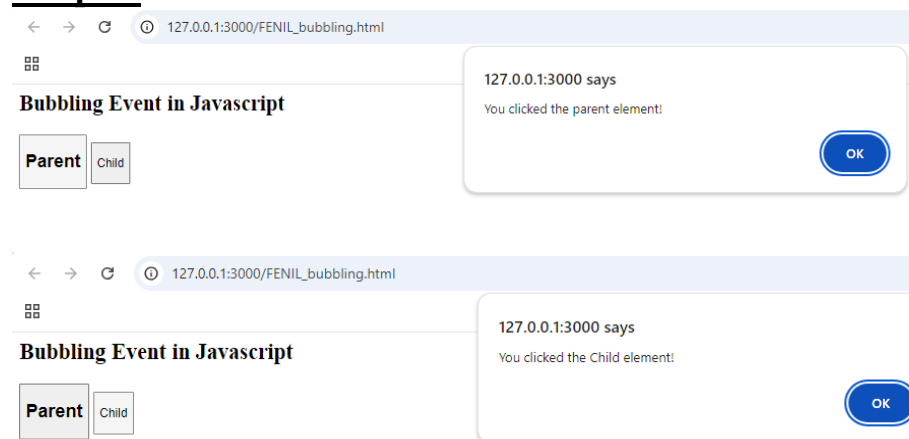

Practical - 17

Aim: Made a form using grid system of Bootstrap.

Program:

```
<!doctype html>
<html lang="en">
<head>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/css/bootstrap.min.css"
rel="stylesheet" integrity="sha384-
EVSTQN3/azprG1Anm3QDgpJLIm9Nao0Yz1ztcQTwFspd3yD65VohhpuuCOMLASjC"
crossorigin="anonymous">
  <title>Form</title>
</head>
<body>
<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/js/bootstrap.bundle.min.js"
integrity="sha384MrcW6ZMFYlzcLA8Nl+NtUVF0sA7MsXsP1UyJoMp4YLEuNSfAP+Jc
Xn/tWtIaxVXM" crossorigin="anonymous"></script>
<script src="https://cdn.jsdelivr.net/npm/@popperjs/core@2.9.2/dist/umd/popper.min.js" int
egrity="sha384IQsoLX15PILFhosVNubq5LC7Qb9DXgDA9i+tQ8Zj3iwWAwPtgFTxbJ8NT
4GN1R8p" crossorigin="anonymous"></script>
<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/js/bootstrap.min.js"
integrity="sha384cVKIPhGWIC2Al4u+LWgx fKTRIfcu0JT xR+EQDz/bgl doEyl4H0zUF0QK
brJ0EcQF" crossorigin="anonymous"></script>

<nav class="navbar navbar-expand-lg navbar-light bg-light">
<div class="container-fluid">
  <b><a class="navbar-brand" href="#">Mahajan Group</a></b>
  <button class="navbar-toggler" type="button" data-bs-toggle="collapse" data-bs-
target="#navbarSupportedContent" aria-controls="navbarSupportedContent" aria-
expanded="false" aria-label="Toggle navigation">
    <span class="navbar-toggler-icon"></span>
  </button>

  <div class="collapse navbar-collapse" id="navbarSupportedContent">
    <ul class="navbar-nav me-auto mb-2 mb-lg-0">
      <li class="nav-item">
        <a class="nav-link active" aria-current="page" href="#">Home</a>
      </li>

      <li class="nav-item">
        <a class="nav-link" href="#">Contact Us</a>
      </li>

      <li class="nav-item">
        <a class="nav-link" href="#">About Us</a>
      </li>
    </ul>
  </div>
</div>
</div>
```

```

        </li>
    </ul>

    <form class="d-flex">
        <input class="form-control me-2" type="search" placeholder="Search" aria-
label="Search">
        <button class="btn btn-outline-success" type="submit">Search</button>
    </form>
</div>
</div>
</nav>

<div class="container">
<form>
    <h1>Registration Form</h1>
    <br>

    <div class="row">
        <div class="col">
            <div class="mb-3">
                <label for="exampleInputEmail1" class="form-label">Name</label>
                <input class="form-control" type="text" placeholder="User Name" aria-
label="default input example">
            </div>
        </div>

        <div class="col">
            <div class="mb-3">
                <label for="exampleInputPassword1" class="form-label">Phone No.</label>
                <input type="number" placeholder="Enter 10 digit valid no." class="form-control"
id="exampleInputPassword1">
            </div>
        </div>

        <div class="row">
            <div class="col">
                <div class="mb-3">
                    <label for="exampleInputEmail1" class="form-label">Email</label>
                    <input type="email" placeholder="@gmail.com" class="form-control"
id="exampleInputEmail1" aria-describedby="emailHelp">
                    <div id="emailHelp" class="form-text"></div>
                </div>
            </div>

            <div class="col">
                <div class="mb-3">
                    <label for="exampleInputPassword1" class="form-label">Password</label>

```

```

        <input type="password" placeholder="Must be 16 digit Password" class="form-
control" id="exampleInputPassword1">
    </div>
</div>

<div class="container">
    <div class="row">
        <div class="col">
            <label for="exampleInputPassword1" class="form-label">Gender : </label>
            <div class="form-check form-check-inline">
                <input class="form-check-input" type="radio" name="inlineRadioOptions"
id="inlineRadio1" value="option1">
                <label class="form-check-label" for="inlineRadio1">Male</label>
            </div>

            <div class="form-check form-check-inline">
                <input class="form-check-input" type="radio" name="inlineRadioOptions"
id="inlineRadio2" value="option2">
                <label class="form-check-label" for="inlineRadio2">Female</label>
            </div>
        </div>

        <div class="col">
            <label for="exampleInputPassword1" class="form-label">Hobbies : </label>
            <div class="form-check form-check-inline">
                <input class="form-check-input" type="checkbox" id="inlineCheckbox1"
value="option1">
                <label class="form-check-label" for="inlineCheckbox1">Singing</label>
            </div>

            <div class="form-check form-check-inline">
                <input class="form-check-input" type="checkbox" id="inlineCheckbox2"
value="option2">
                <label class="form-check-label" for="inlineCheckbox2">Swimming</label>
            </div>
        </div>

        <div class="mb-3">
            <label for="exampleFormControlTextarea1" class="form-label">Residence
Address</label>
            <textarea class="form-control" placeholder="Landmark Optional"
id="exampleFormControlTextarea1" rows="3"></textarea>
            <input type="checkbox" class="form-check-input" id="exampleCheck1">
            <label class="form-check-label" for="exampleCheck1">T&C</label>
            <br>
        </div>

        <button type="submit" class="btn btn-primary">Submit</button>

```

```
</div>
</form>
</body>
</html>
```

Output:

The screenshot displays a web browser window with the address bar showing "127.0.0.1:3000/FENIL_pra17.html". The page features a navigation bar for "Mahajan Group" with links to "Home", "Contact Us", and "About Us", along with a search bar. The main heading is "Registration Form". The form includes fields for "Name" (User Name), "Phone No." (Enter 10 digit valid no.), "Email" (@gmail.com), "Password" (Must be 16 digit Password), "Gender" (radio buttons for Male and Female), "Hobbies" (checkboxes for Singing and Swimming), "Residence Address", and "Landmark Optional". A "T&C" checkbox is also present. A blue "Submit" button is at the bottom.

Mahajan Group Home Contact Us About Us Search Search

Registration Form

Name Phone No.

User Name Enter 10 digit valid no.

Email Password

@gmail.com Must be 16 digit Password

Gender : ☐ Male ☐ Female Hobbies : ☐ Singing ☐ Swimming

Residence Address

Landmark Optional

☐ T&C

Submit

Practical - 18

Aim: Display responsive image and different style of image using class of Bootstrap.

Program:


```
<!doctype html>
<html lang="en">
<head>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/css/bootstrap.min.css"
rel="stylesheet" integrity="sha384-
EVSTQN3/azprG1Anm3QDgpJLIm9Nao0Yz1ztcQTWfSpd3yD65VohhpUuCOmLASjC"
crossorigin="anonymous">
  <title>Hello, world!</title>
</head>
<body>
  <h2>Responsive Image </h2>
  
  <script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/js/bootstrap.bundle.min.js"
integrity="sha384-
MrcW6ZMFYlzcLA8Nl+NtUVF0sA7MsXsP1UyJoMp4YLEuNSfAP+JcXn/tWtIaxVXM"
crossorigin="anonymous"></script>
  <script src="https://cdn.jsdelivr.net/npm/@popperjs/core@2.9.2/dist/umd/popper.min.js"
integrity="sha384-
IQsoLX15PILFhosVNubq5LC7Qb9DXgDA9i+tQ8Zj3iwWAwPtgFTxbJ8NT4GN1R8p"
crossorigin="anonymous"></script>
  <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/js/bootstrap.min.js"
integrity="sha384-
cVKIPhGWiC2Al4u+LWgxfKTRlcfu0JTxR+EQDz/bglldoEyl4H0zUF0QKbrJ0EcQF"
crossorigin="anonymous"></script>
</body>
</html>
```

Output:

Img1---



Img2---

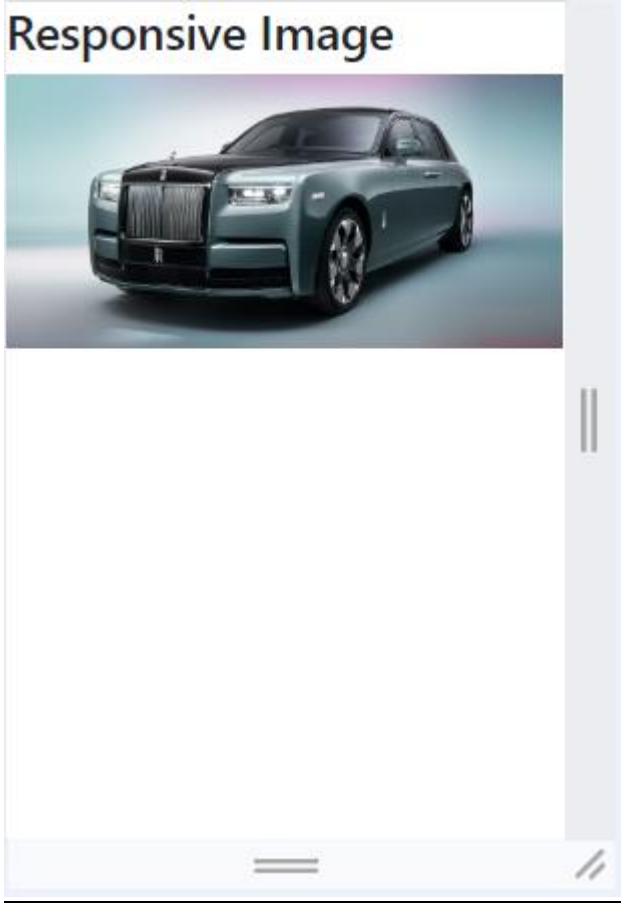

Img3---



Practical - 19

Aim: Apply header and made a home page using Bootstrap and sliders
Carousel plug-in.

Program:

```
<!doctype html>
<html lang="en">
<head>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/css/bootstrap.min.css"
rel="stylesheet" integrity="sha384EVSTQN3/azprG1Anm3QDgpJLIm9Nao0Yz1ztcQTWfSp
d3yD65VohhpuuCOMLASjC" crossorigin="anonymous">
</head>
<body>
<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/js/bootstrap.bundle.min.js"
integrity="sha384MrcW6ZMFYlzcLA8NI+NtUVF0sA7MsXsP1UyJoMp4YLEuNSfAP+Jc
Xn/tWtIaxVXM" crossorigin="anonymous"></script>
<script src="https://cdn.jsdelivr.net/npm/@popperjs/core@2.9.2/dist/umd/popper.min.js"
integrity="sha384IQsoLX15PILFhosVNubq5LC7Qb9DXgDA9i+tQ8Zj3iwWAwPtgFTxbJ8N
T4GN1R8p" crossorigin="anonymous"></script>
<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/js/bootstrap.min.js"
integrity="sha384cVKIPhGWic2A14u+LWgx fKTRIfu0JT xR+EQDz/bgldoEyl4H0zUF0QK
brJ0EcQF" crossorigin="anonymous"></script>

<nav class="navbar navbar-expand-lg navbar-light bg-light">
  <div class="container-fluid">
    <b><a class="navbar-brand" href="#">Mahajan Group Pvt.Ltd.</a></b>
    <button class="navbar-toggler" type="button" data-bs-toggle="collapse" data-bs-
target="#navbarSupportedContent" aria-controls="navbarSupportedContent" aria-
expanded="false" aria-label="Toggle navigation">
      <span class="navbar-toggler-icon"></span>
    </button>

  <div class="collapse navbar-collapse" id="navbarSupportedContent">
    <ul class="navbar-nav me-auto mb-2 mb-lg-0">
      <li class="nav-item">
        <a class="nav-link active" aria-current="page" href="#">Home</a>
      </li>
      <li class="nav-item">
        <a class="nav-link" href="#">Contact Us</a>
      </li>
      <li class="nav-item">
        <a class="nav-link" href="#">About Us</a>
      </li>
    </ul>
```

```

    <form class="d-flex">
      <input class="form-control me-2" type="search" placeholder="Cars Availabe" aria-
label="Search">
      <button class="btn btn-outline-success" type="submit">Search</button>
    </form>
  </div>
</div>
</nav>

<div id="carouselExampleCaptions" class="carousel slide" data-bs-ride="carousel">
  <div class="carousel-indicators">
    <button type="button" data-bs-target="#carouselExampleCaptions" data-bs-slide-
to="0" class="active" aria-current="true" aria-label="Slide 1"></button>
    <button type="button" data-bs-target="#carouselExampleCaptions" data-bs-slide-
to="1" class="active" aria-label="Slide 2"></button>
    <button type="button" data-bs-target="#carouselExampleCaptions" data-bs-slide-
to="2" class="active" aria-label="Slide 3"></button>
  </div>
  <div class="carousel-inner">
    <div class="carousel-item active">
      
      <div class="carousel-caption d-none d-md-block">
        <h5>Rolls-Royce Cullinan</h5>
        <p>13 cr</p>
      </div>
    </div>
    <div class="carousel-item">
      
      <div class="carousel-caption d-none d-md-block">
        <h5>Rolls-Royce Phantom</h5>
        <p>10 cr</p>
      </div>
    </div>
    <div class="carousel-item">
      
      <div class="carousel-caption d-none d-md-block">
        <h5>Rolls-Royce Spectre</h5>
        <p>8 cr</p>
      </div>
    </div>
  </div>
  <div>
    <button class="carousel-control-prev" type="button" data-bs-
target="#carouselExampleCaptions" data-bs-slide="prev">
      <span class="carousel-control-prev-icon" aria-hidden="true"></span>
      <span class="visually-hidden">Previous</span>
    </button>
  </div>
</div>

```



```

<button class="carousel-control-next" type="button" data-bs-
target="#carouselExampleCaptions" data-bs-slide="next">
  <span class="carousel-control-next-icon" aria-hidden="true"></span>
  <span class="visually-hidden">Next</span>
</button>
</div>
</body>
</html>

```

Output:

