


Overview of C2P-Cache

High-fidelity vector redraw of the Figure 5 information layout (adapted, independently drawn).

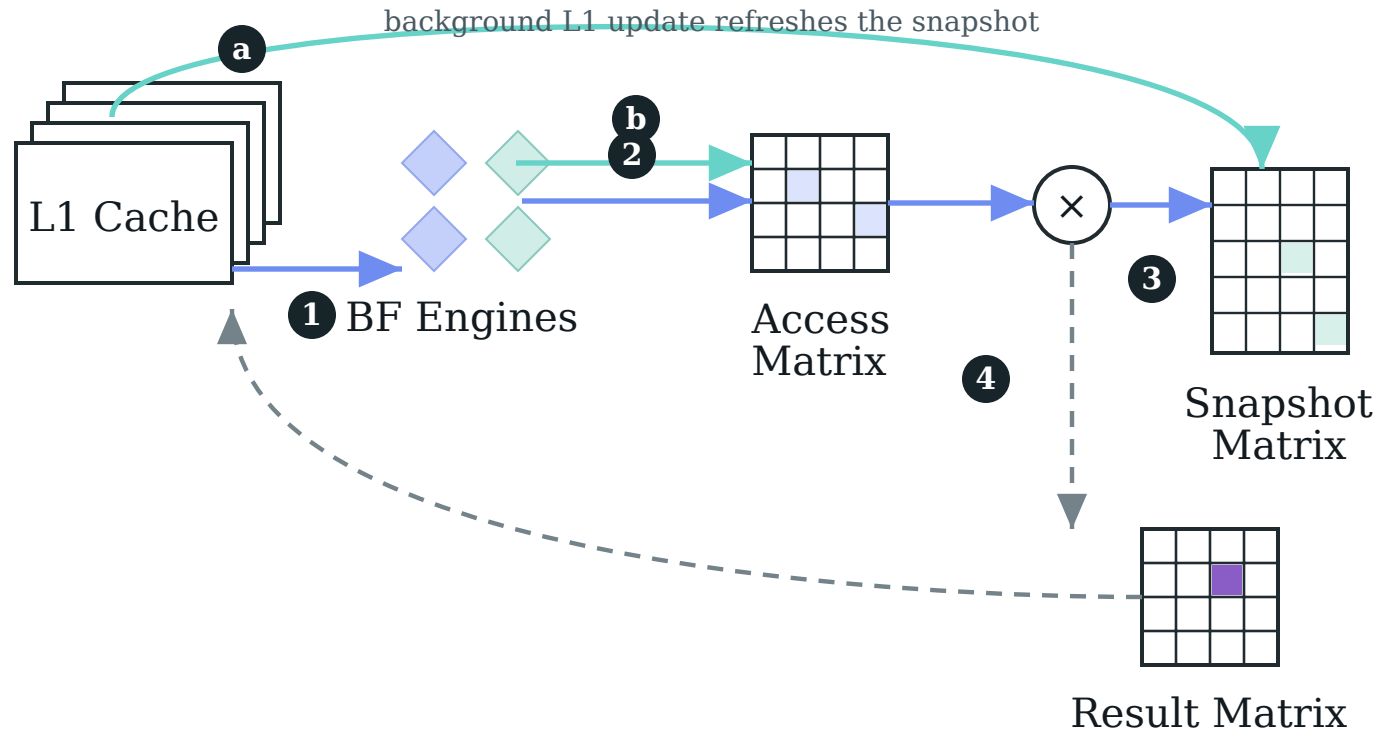

C2P operation

- Encode the L1 miss into sparse Bloom-filter access positions.
- Aggregate positions into an Access Matrix row.
- Boolean-match Access and Snapshot matrices, then prune candidate L1s.
- Probe remaining peers; no exact hit follows the normal shared-L2 path.

This editable redraw preserves the original figure's explanatory order while using independently drawn vectors and typesetting.