

EX.NO: 3	IMPLEMENTATION OF INTERACTIVE JAVASCRIPT
DATE:	

QUESTION:

Interactive javascript webpage, incorporating javascript event, functions (button clicks, form submission of webpage)

AIM:

To design and implement an interactive Online Ticket Booking System using HTML and JavaScript, which allows users to enter booking details, select a movie, calculate the total ticket cost, and display the booking confirmation using JavaScript events and functions.

ALGORITHM:

1. Start the program.
2. Create a web form to accept user details such as Name, Movie selection, and Number of tickets.
3. Assign ticket prices to each movie option.
4. Attach a form submission event to the booking form.
5. When the user clicks the Book Ticket button:
6. Prevent the default page refresh behavior.
7. Read the input values entered by the user.
8. Calculate the total ticket cost using the formula:
Total Cost = Ticket Price × Number of Tickets.
9. Display the booking confirmation details and total amount on the same web page.
10. End the program.

PROGRAM:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <title>Online Ticket Booking</title>

  <style>
    body {
      font-family: Arial, sans-serif;
      background-color: #f2f2f2;
      padding: 40px;
    }

    .container {
      background: white;
```

```
        width: 350px;
        margin: auto;
        padding: 20px;
        border-radius: 8px;
    }

    input, select, button {
        width: 100%;
        padding: 8px;
        margin-top: 10px;
    }

    button {
        background-color: #007bff;
        color: white;
        border: none;
        cursor: pointer;
    }

    button:hover {
        background-color: #0056b3;
    }

    #output {
        margin-top: 15px;
        color: green;
        font-weight: bold;
    }
</style>
</head>
<body>
<div class="container">
    <h2>Online Ticket Booking</h2>

    <form onsubmit="bookTicket(event)">
        <label>Name:</label>
        <input type="text" id="name" required>
        <label>Movie:</label>
        <select id="movie">
            <option value="120">Movie A - ₹120</option>
            <option value="180">Movie B - ₹180</option>
            <option value="220">Movie C - ₹220</option>
        </select>

        <label>Number of Tickets:</label>
        <input type="number" id="tickets" min="1" required>
```

```

        <button type="submit">Book Ticket</button>
    </form>

    <div id="output"></div>
</div>
<script>
    function bookTicket(event) {
        event.preventDefault(); // Prevent page reload

        let name = document.getElementById("name").value;
        let price = document.getElementById("movie").value;
        let tickets = document.getElementById("tickets").value;


        let total = price * tickets;

        document.getElementById("output").innerHTML =
            "Booking Successful!<br>" +
            "Name: " + name + "<br>" +
            "Tickets: " + tickets + "<br>" +
            "Total Amount: ₹" + total;
    }
</script>

</body>
</html>

```

OUTPUT:

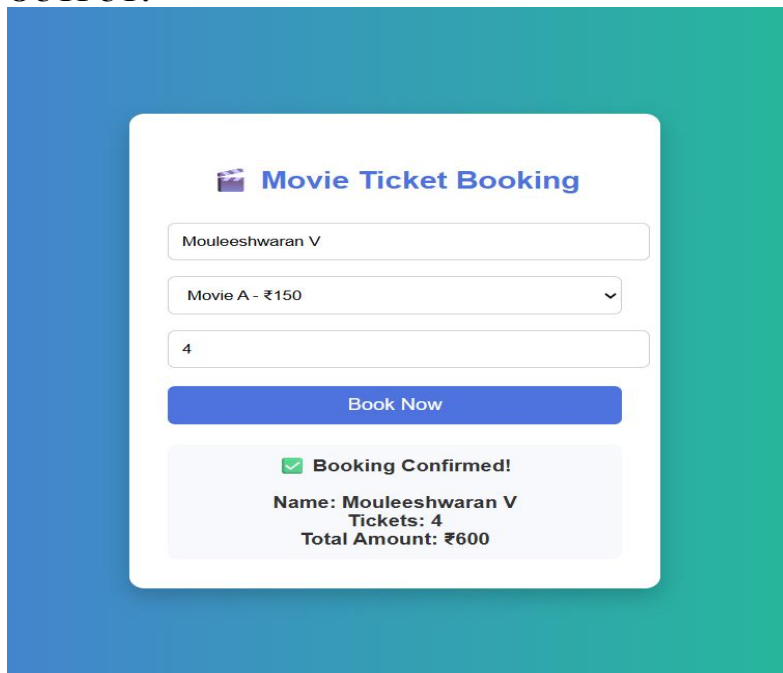

The screenshot displays a web form titled "Movie Ticket Booking" on a blue and green gradient background. The form contains three input fields: a text field for the name "Mouleeshwaran V", a dropdown menu for the movie "Movie A - ₹150", and a text field for the number of tickets "4". Below these fields is a blue "Book Now" button. Underneath the button, a confirmation message is shown: "Booking Confirmed!" with a green checkmark icon. Below the confirmation, the booking details are listed: "Name: Mouleeshwaran V", "Tickets: 4", and "Total Amount: ₹600".

Mark Allocation		
Particulars	Marks Allotted	Marks Awarded
Program/Simulation	40	
Program Execution	30	
Result	20	
Viva Voce	10	
Total	100	

RESULT:

Thus, JavaScript interacts with the HTML form to collect user input, calculate the total ticket amount, and display the booking confirmation dynamically below the form without reloading the page. The interactivity is achieved using event handling, functions, and DOM manipulation.