

Final Assignment

January 27, 2023

Extracting and Visualizing Stock Data

Description

Extracting essential data from a dataset and displaying it is a necessary part of data science; therefore individuals can make correct decisions based on the data. In this assignment, you will extract some stock data, you will then display this data in a graph.

Table of Contents

- Define a Function that Makes a Graph
- Question 1: Use yfinance to Extract Stock Data
- Question 2: Use Webscraping to Extract Tesla Revenue Data
- Question 3: Use yfinance to Extract Stock Data
- Question 4: Use Webscraping to Extract GME Revenue Data
- Question 5: Plot Tesla Stock Graph
- Question 6: Plot GameStop Stock Graph

Estimated Time Needed: 30 min

```
[1]: !pip install yfinance==0.1.67
!mamba install bs4==4.10.0 -y
!pip install nbformat==4.2.0
```

Collecting yfinance==0.1.67

Downloading yfinance-0.1.67-py2.py3-none-any.whl (25 kB)

Requirement already satisfied: pandas>=0.24 in

/home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from yfinance==0.1.67) (1.3.5)

Requirement already satisfied: requests>=2.20 in

/home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from yfinance==0.1.67) (2.28.1)

Requirement already satisfied: lxml>=4.5.1 in

/home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from yfinance==0.1.67) (4.9.1)

Collecting multitasking>=0.0.7

Downloading multitasking-0.0.11-py3-none-any.whl (8.5 kB)


Requirement already satisfied: numpy>=1.15 in

/home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from

```

yfinance==0.1.67) (1.21.6)
Requirement already satisfied: python-dateutil>=2.7.3 in
/home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from
pandas>=0.24->yfinance==0.1.67) (2.8.2)
Requirement already satisfied: pytz>=2017.3 in
/home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from
pandas>=0.24->yfinance==0.1.67) (2022.6)
Requirement already satisfied: charset-normalizer<3,>=2 in
/home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from
requests>=2.20->yfinance==0.1.67) (2.1.1)
Requirement already satisfied: certifi>=2017.4.17 in
/home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from
requests>=2.20->yfinance==0.1.67) (2022.9.24)
Requirement already satisfied: urllib3<1.27,>=1.21.1 in
/home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from
requests>=2.20->yfinance==0.1.67) (1.26.13)
Requirement already satisfied: idna<4,>=2.5 in
/home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from
requests>=2.20->yfinance==0.1.67) (3.4)
Requirement already satisfied: six>=1.5 in
/home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from python-
dateutil>=2.7.3->pandas>=0.24->yfinance==0.1.67) (1.16.0)
Installing collected packages: multitasking, yfinance
Successfully installed multitasking-0.0.11 yfinance-0.1.67

```

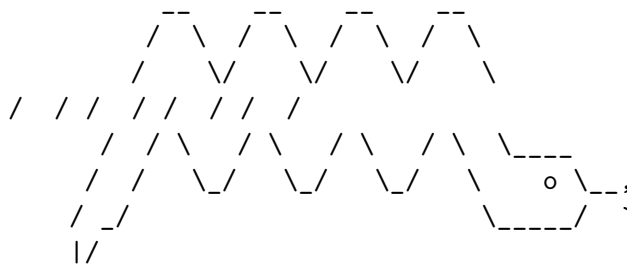

mamba (0.15.3) supported by @QuantStack

GitHub: <https://github.com/mamba-org/mamba>

Twitter: <https://twitter.com/QuantStack>

Looking for: ['bs4==4.10.0']

```
pkgs/main/linux-64      [<=>          ] (00m:00s)
pkgs/main/linux-64      [=>          ] (00m:00s) 340 KB / ?? (1.09 MB/s)
pkgs/main/linux-64      [=>          ] (00m:00s) 340 KB / ?? (1.09 MB/s)
pkgs/main/noarch        [<=>          ] (00m:00s)
pkgs/main/linux-64      [=>          ] (00m:00s) 340 KB / ?? (1.09 MB/s)
pkgs/main/noarch        [=>          ] (00m:00s) 340 KB / ?? (1.09 MB/s)
pkgs/main/linux-64      [=>          ] (00m:00s) 340 KB / ?? (1.09 MB/s)
pkgs/main/noarch        [=>          ] (00m:00s) 340 KB / ?? (1.09 MB/s)
pkgs/r/linux-64         [<=>          ] (00m:00s)
pkgs/main/linux-64      [=>          ] (00m:00s) 340 KB / ?? (1.09 MB/s)
pkgs/main/noarch        [=>          ] (00m:00s) 340 KB / ?? (1.09 MB/s)
pkgs/r/linux-64         [=>          ] (00m:00s) 324 KB / ?? (1.04 MB/s)
pkgs/main/linux-64      [=>          ] (00m:00s) 340 KB / ?? (1.09 MB/s)
pkgs/main/noarch        [=>          ] (00m:00s) 340 KB / ?? (1.09 MB/s)
pkgs/r/linux-64         [=>          ] (00m:00s) 324 KB / ?? (1.04 MB/s)
pkgs/r/noarch           [<=>          ] (00m:00s)
pkgs/main/linux-64      [=>          ] (00m:00s) 340 KB / ?? (1.09 MB/s)
pkgs/main/noarch        [=>          ] (00m:00s) 340 KB / ?? (1.09 MB/s)
pkgs/r/linux-64         [=>          ] (00m:00s) 324 KB / ?? (1.04 MB/s)
pkgs/r/noarch           [=>          ] (00m:00s) 332 KB / ?? (1.06 MB/s)
pkgs/main/linux-64      [=>          ] (00m:00s) 340 KB / ?? (1.09 MB/s)
pkgs/main/noarch        [<=>          ] (00m:00s) Finalizing...
pkgs/r/linux-64         [=>          ] (00m:00s) 324 KB / ?? (1.04 MB/s)
pkgs/r/noarch           [=>          ] (00m:00s) 332 KB / ?? (1.06 MB/s)
pkgs/main/linux-64      [=>          ] (00m:00s) 340 KB / ?? (1.09 MB/s)
pkgs/main/noarch        [<=>          ] (00m:00s) Done
pkgs/r/linux-64         [=>          ] (00m:00s) 324 KB / ?? (1.04 MB/s)
pkgs/r/noarch           [=>          ] (00m:00s) 332 KB / ?? (1.06 MB/s)
pkgs/main/noarch        [=====] (00m:00s) Done
pkgs/main/linux-64      [=>          ] (00m:00s) 340 KB / ?? (1.09 MB/s)
pkgs/r/linux-64         [=>          ] (00m:00s) 324 KB / ?? (1.04 MB/s)
pkgs/r/noarch           [=>          ] (00m:00s) 332 KB / ?? (1.06 MB/s)
pkgs/main/linux-64      [<=>          ] (00m:00s) 340 KB / ?? (1.09 MB/s)
pkgs/r/linux-64         [=>          ] (00m:00s) 324 KB / ?? (1.04 MB/s)
pkgs/r/noarch           [=>          ] (00m:00s) 332 KB / ?? (1.06 MB/s)
pkgs/main/linux-64      [ <=>          ] (00m:00s) 1 MB / ?? (2.84 MB/s)
pkgs/r/linux-64         [=>          ] (00m:00s) 324 KB / ?? (1.04 MB/s)
pkgs/r/noarch           [=>          ] (00m:00s) 332 KB / ?? (1.06 MB/s)
pkgs/main/linux-64      [ <=>          ] (00m:00s) 1 MB / ?? (2.84 MB/s)
pkgs/r/linux-64         [<=>          ] (00m:00s) 324 KB / ?? (1.04 MB/s)
pkgs/r/noarch           [=>          ] (00m:00s) 332 KB / ?? (1.06 MB/s)
pkgs/main/linux-64      [ <=>          ] (00m:00s) 1 MB / ?? (2.84 MB/s)
pkgs/r/linux-64         [ <=>          ] (00m:00s) 1 MB / ?? (2.74 MB/s)
pkgs/r/noarch           [=>          ] (00m:00s) 332 KB / ?? (1.06 MB/s)
pkgs/main/linux-64      [ <=>          ] (00m:00s) 1 MB / ?? (2.84 MB/s)
pkgs/r/linux-64         [ <=>          ] (00m:00s) 1 MB / ?? (2.74 MB/s)
```

```

pkgs/r/noarch          [ <=>          ] (00m:00s) 332 KB / ?? (1.06 MB/s)
pkgs/main/linux-64    [ <=>          ] (00m:00s) 1 MB / ?? (2.84 MB/s)
pkgs/r/linux-64       [ <=>          ] (00m:00s) 1 MB / ?? (2.74 MB/s)
pkgs/r/noarch         [ <=>          ] (00m:00s) 960 KB / ?? (2.06 MB/s)
pkgs/main/linux-64    [ <=>          ] (00m:00s) 1 MB / ?? (2.84 MB/s)
pkgs/r/linux-64       [ <=>          ] (00m:00s) Finalizing...
pkgs/r/noarch         [ <=>          ] (00m:00s) 960 KB / ?? (2.06 MB/s)
pkgs/main/linux-64    [ <=>          ] (00m:00s) 1 MB / ?? (2.84 MB/s)
pkgs/r/linux-64       [ <=>          ] (00m:00s) Done
pkgs/r/noarch         [ <=>          ] (00m:00s) 960 KB / ?? (2.06 MB/s)
pkgs/r/linux-64       [=====] (00m:00s) Done
pkgs/main/linux-64    [ <=>          ] (00m:00s) 1 MB / ?? (2.84 MB/s)
pkgs/r/noarch         [ <=>          ] (00m:00s) 960 KB / ?? (2.06 MB/s)
pkgs/main/linux-64    [ <=>          ] (00m:00s) 1 MB / ?? (2.84 MB/s)
pkgs/r/noarch         [ <=>          ] (00m:00s) Finalizing...
pkgs/main/linux-64    [ <=>          ] (00m:00s) 1 MB / ?? (2.84 MB/s)
pkgs/r/noarch         [ <=>          ] (00m:00s) Done
pkgs/r/noarch         [=====] (00m:00s) Done
pkgs/main/linux-64    [ <=>          ] (00m:00s) 1 MB / ?? (2.84 MB/s)
pkgs/main/linux-64    [ <=>          ] (00m:00s) 1 MB / ?? (2.84 MB/s)
pkgs/main/linux-64    [ <=>          ] (00m:00s) 2 MB / ?? (3.35 MB/s)
pkgs/main/linux-64    [ <=>          ] (00m:00s) 2 MB / ?? (3.35 MB/s)
pkgs/main/linux-64    [ <=>          ] (00m:00s) 3 MB / ?? (3.51 MB/s)
pkgs/main/linux-64    [ <=>          ] (00m:00s) 3 MB / ?? (3.51 MB/s)
pkgs/main/linux-64    [ <=>          ] (00m:00s) 3 MB / ?? (3.70 MB/s)
pkgs/main/linux-64    [ <=>          ] (00m:00s) 3 MB / ?? (3.70 MB/s)
pkgs/main/linux-64    [ <=>          ] (00m:00s) 4 MB / ?? (3.85 MB/s)
pkgs/main/linux-64    [ <=>          ] (00m:00s) 4 MB / ?? (3.85 MB/s)
pkgs/main/linux-64    [ <=>          ] (00m:00s) 5 MB / ?? (3.96 MB/s)
pkgs/main/linux-64    [ <=>          ] (00m:00s) Finalizing...
pkgs/main/linux-64    [ <=>          ] (00m:01s) Done
pkgs/main/linux-64    [=====] (00m:01s) Done

```

Pinned packages:

- python 3.7.*

Transaction

Prefix: /home/jupyterlab/conda/envs/python

Updating specs:

- bs4==4.10.0
- ca-certificates
- certifi
- openssl

Package	Version	Build	Channel	Size
Install:				
+ bs4	4.10.0	hd3eb1b0_0	pkgs/main/noarch	10 KB
Change:				
- openssl	1.1.1s	h0b41bf4_1	installed	
+ openssl	1.1.1s	h7f8727e_0	pkgs/main/linux-64	4 MB
Upgrade:				
- ca-certificates	2022.9.24	ha878542_0	installed	
+ ca-certificates	2023.01.10	h06a4308_0	pkgs/main/linux-64	120 KB
- certifi	2022.9.24	pyhd8ed1ab_0	installed	
+ certifi	2022.12.7	py37h06a4308_0	pkgs/main/linux-64	150 KB
Downgrade:				
- beautifulsoup4	4.11.1	pyha770c72_0	installed	
+ beautifulsoup4	4.10.0	pyh06a4308_0	pkgs/main/noarch	85 KB
Summary:				
Install: 1 packages				
Change: 1 packages				
Upgrade: 2 packages				
Downgrade: 1 packages				
Total download: 4 MB				
Downloading	[>] (00m:00s)	39.09 KB/s
Extracting	[>] (--:--)	
Finished bs4			(00m:00s)	10
KB	39 KB/s			

```

Downloading [> ] (00m:00s) 39.09 KB/s
Extracting [> ] (--:--)
Downloading [> ] (00m:00s) 39.09 KB/s
Extracting [> ] (--:--)
Downloading [> ] (00m:00s) 39.09 KB/s
Extracting [> ] (--:--)
Downloading [> ] (00m:00s) 363.58 KB/s
Extracting [> ] (--:--)
Finished beautifulsoup4 (00m:00s) 85
KB 325 KB/s
Downloading [> ] (00m:00s) 363.58 KB/s
Extracting [> ] (--:--)
Downloading [==> ] (00m:00s) 821.52 KB/s
Extracting [> ] (--:--)
Downloading [==> ] (00m:00s) 821.52 KB/s
Extracting [=====> ] (00m:00s) 1 / 5
Downloading [==> ] (00m:00s) 821.52 KB/s
Extracting [=====> ] (00m:00s) 1 / 5
Downloading [==> ] (00m:00s) 821.52 KB/s
Extracting [=====> ] (00m:00s) 1 / 5
Downloading [===> ] (00m:00s) 1.35 MB/s
Extracting [=====> ] (00m:00s) 1 / 5
Finished ca-certificates (00m:00s) 120
KB 459 KB/s
Downloading [===> ] (00m:00s) 1.35 MB/s
Extracting [=====> ] (00m:00s) 1 / 5
Downloading [===> ] (00m:00s) 1.35 MB/s
Extracting [=====> ] (00m:00s) 1 / 5
Finished certifi (00m:00s) 150
KB 567 KB/s
Downloading [===> ] (00m:00s) 1.35 MB/s
Extracting [=====> ] (00m:00s) 1 / 5
Downloading [===> ] (00m:00s) 1.35 MB/s
Extracting [=====> ] (00m:00s) 1 / 5
Downloading [===> ] (00m:00s) 1.35 MB/s
Extracting [=====> ] (00m:00s) 2 / 5
Downloading [===> ] (00m:00s) 1.35 MB/s
Extracting [=====> ] (00m:00s) 2 / 5
Downloading [===> ] (00m:00s) 1.35 MB/s
Extracting [=====> ] (00m:00s) 3 / 5
Downloading [===> ] (00m:00s) 1.35 MB/s
Extracting [=====> ] (00m:00s) 3 / 5
Downloading [===> ] (00m:00s) 1.35 MB/s
Extracting [=====> ] (00m:00s) 4 / 5
Downloading [=====> ] (00m:00s) 8.13 MB/s
Extracting [=====> ] (00m:00s) 4 / 5
Downloading [=====> ] (00m:00s) 8.13 MB/s
Extracting [=====> ] (00m:00s) 4 / 5

```

```

Downloading [=====] (00m:00s) 9.47 MB/s
Extracting [=====>] (00m:00s) 4 / 5
Finished openssl (00m:00s) 4
MB 9 MB/s
Downloading [=====] (00m:00s) 9.47 MB/s
Extracting [=====>] (00m:00s) 4 / 5
Downloading [=====] (00m:00s) 9.47 MB/s
Extracting [=====>] (00m:00s) 4 / 5
Downloading [=====] (00m:00s) 9.47 MB/s
Extracting [=====>] (00m:00s) 4 / 5
Downloading [=====] (00m:00s) 9.47 MB/s
Extracting [=====] (00m:00s) 5 / 5
Preparing transaction: done
Verifying transaction: done
Executing transaction: done
Collecting nbformat==4.2.0
  Downloading nbformat-4.2.0-py2.py3-none-any.whl (153 kB)
    153.3/153.3 kB
15.7 MB/s eta 0:00:00
Requirement already satisfied: jupyter-core in
/home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from
nbformat==4.2.0) (4.12.0)
Requirement already satisfied: traitlets>=4.1 in
/home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from
nbformat==4.2.0) (5.6.0)
Requirement already satisfied: jsonschema!=2.5.0,>=2.4 in
/home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from
nbformat==4.2.0) (4.17.3)
Requirement already satisfied: ipython-genutils in
/home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from
nbformat==4.2.0) (0.2.0)
Requirement already satisfied: importlib-resources>=1.4.0 in
/home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from
jsonschema!=2.5.0,>=2.4->nbformat==4.2.0) (5.10.1)
Requirement already satisfied: attrs>=17.4.0 in
/home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from
jsonschema!=2.5.0,>=2.4->nbformat==4.2.0) (22.1.0)
Requirement already satisfied: pkgutil-resolve-name>=1.3.10 in
/home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from
jsonschema!=2.5.0,>=2.4->nbformat==4.2.0) (1.3.10)
Requirement already satisfied: typing-extensions in
/home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from
jsonschema!=2.5.0,>=2.4->nbformat==4.2.0) (4.4.0)
Requirement already satisfied: importlib-metadata in
/home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from
jsonschema!=2.5.0,>=2.4->nbformat==4.2.0) (4.11.4)
Requirement already satisfied: pyparsing!=0.17.0,!0.17.1,!0.17.2,>=0.14.0 in
/home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from

```

```

jsonschema!=2.5.0,>=2.4->nbformat==4.2.0) (0.19.2)
Requirement already satisfied: zipp>=3.1.0 in
/home/jupyterlab/conda/envs/python/lib/python3.7/site-packages (from importlib-
resources>=1.4.0->jsonschema!=2.5.0,>=2.4->nbformat==4.2.0) (3.11.0)
Installing collected packages: nbformat
  Attempting uninstall: nbformat
    Found existing installation: nbformat 5.7.0
    Uninstalling nbformat-5.7.0:
      Successfully uninstalled nbformat-5.7.0
ERROR: pip's dependency resolver does not currently take into account all
the packages that are installed. This behaviour is the source of the following
dependency conflicts.

nbconvert 7.2.6 requires nbformat>=5.1, but you have nbformat 4.2.0 which is
incompatible.

nbclient 0.7.2 requires nbformat>=5.1, but you have nbformat 4.2.0 which is
incompatible.

jupyter-server 1.23.3 requires nbformat>=5.2.0, but you have nbformat 4.2.0
which is incompatible.

Successfully installed nbformat-4.2.0

```

```

[23]: import yfinance as yf
import pandas as pd
import requests
from bs4 import BeautifulSoup
import plotly.graph_objects as go
from plotly.subplots import make_subplots

```

```

[26]: from bs4 import BeautifulSoup

```

0.1 Define Graphing Function

In this section, we define the function `make_graph`. You don't have to know how the function works, you should only care about the inputs. It takes a dataframe with stock data (dataframe must contain Date and Close columns), a dataframe with revenue data (dataframe must contain Date and Revenue columns), and the name of the stock.

```

[9]: def make_graph(stock_data, revenue_data, stock):
    fig = make_subplots(rows=2, cols=1, shared_xaxes=True,
↳ subplot_titles=("Historical Share Price", "Historical Revenue"),
↳ vertical_spacing = .3)
    stock_data_specific = stock_data[stock_data.Date <= '2021--06-14']
    revenue_data_specific = revenue_data[revenue_data.Date <= '2021-04-30']

```



```

fig.add_trace(go.Scatter(x=pd.to_datetime(stock_data_specific.Date,
↪infer_datetime_format=True), y=stock_data_specific.Close.astype("float"),
↪name="Share Price"), row=1, col=1)
fig.add_trace(go.Scatter(x=pd.to_datetime(revenue_data_specific.Date,
↪infer_datetime_format=True), y=revenue_data_specific.Revenue.
↪astype("float"), name="Revenue"), row=2, col=1)
fig.update_xaxes(title_text="Date", row=1, col=1)
fig.update_xaxes(title_text="Date", row=2, col=1)
fig.update_yaxes(title_text="Price ($US)", row=1, col=1)
fig.update_yaxes(title_text="Revenue ($US Millions)", row=2, col=1)
fig.update_layout(showlegend=False,
height=900,
title=stock,
xaxis_rangeslider_visible=True)
fig.show()

```

0.2 Question 1: Use yfinance to Extract Stock Data

Using the `Ticker` function enter the ticker symbol of the stock we want to extract data on to create a ticker object. The stock is Tesla and its ticker symbol is `TSLA`.

Using the ticker object and the function `history` extract stock information and save it in a dataframe named `tesla_data`. Set the `period` parameter to `max` so we get information for the maximum amount of time.

```
[6]: tesla = yf.Ticker('TSLA')
```

```
[6]: tesla = yf.Ticker('TSLA')
```

```
[7]: tesla_data = tesla.history(period="max")
```

```
[10]: tesla_data.reset_index(inplace=True)
tesla_data.head()
```

```
[10]:
```

	Date	Open	High	Low	Close	Volume	Dividends	\
0	2010-06-29	1.266667	1.666667	1.169333	1.592667	281494500	0	
1	2010-06-30	1.719333	2.028000	1.553333	1.588667	257806500	0	
2	2010-07-01	1.666667	1.728000	1.351333	1.464000	123282000	0	
3	2010-07-02	1.533333	1.540000	1.247333	1.280000	77097000	0	
4	2010-07-06	1.333333	1.333333	1.055333	1.074000	103003500	0	

```

Stock Splits
0      0.0
1      0.0
2      0.0
3      0.0
4      0.0

```

Reset the index using the `reset_index(inplace=True)` function on the `tesla_data` DataFrame and display the first five rows of the `tesla_data` dataframe using the `head` function. Take a screenshot of the results and code from the beginning of Question 1 to the results below.

0.3 Question 2: Use Webscraping to Extract Tesla Revenue Data

```
[14]: url = 'https://cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud/
↳IBMDeveloperSkillsNetwork-PY0220EN-SkillsNetwork/labs/project/revenue.htm'
html_data = requests.get(url).text
```

Use the `requests` library to download the webpage `https://cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud/IBMDeveloperSkillsNetwork-PY0220EN-SkillsNetwork/labs/project/revenue.htm` Save the text of the response as a variable named `html_data`.

Use the `requests` library to download the webpage `https://cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud/IBMDeveloperSkillsNetwork-PY0220EN-SkillsNetwork/labs/project/revenue.htm` Save the text of the response as a variable named `html_data`.

Parse the html data using `beautiful_soup`.

```
[27]: soup = BeautifulSoup(html_data, "html5lib")
```

```
-----
FeatureNotFound                                Traceback (most recent call last)
/tmp/ipykernel_582/4013523588.py in <module>
----> 1 soup = BeautifulSoup(html_data, "html5lib")

~/conda/envs/python/lib/python3.7/site-packages/bs4/__init__.py in
↳__init__(self, markup, features, builder, parse_only, from_encoding,
↳exclude_encodings, element_classes, **kwargs)
    246         "Couldn't find a tree builder with the features you "
    247         "requested: %s. Do you need to install a parser
↳library?"
--> 248         % ", ".join(features))
    249
    250         # At this point either we have a TreeBuilder instance in

FeatureNotFound: Couldn't find a tree builder with the features you requested:
↳html5lib. Do you need to install a parser library?
```

Use the `requests` library to download the webpage `https://cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud/IBMDeveloperSkillsNetwork-PY0220EN-SkillsNetwork/labs/project/revenue.htm` Save the text of the response as a variable named `html_data`.

Using `BeautifulSoup` or the `read_html` function extract the table with `Tesla Quarterly Revenue`

and store it into a dataframe named `tesla_revenue`. The dataframe should have columns `Date` and `Revenue`.

[Click here](#) if you need help locating the table

Below is the code to isolate the table, you will now need to loop through the rows and columns

```
soup.find_all("tbody")[1]
```

If you want to use the `read_html` function the table is located at index 1

```
[22]: tesla_revenue = pd.DataFrame(columns=['Data', 'Revenue'])
      for table in soup.find_all('table'):
          if ('Tesla Quarterly Revenue' in table.find('th').text):
              rows = table.find_all('tr')
              for row in rows:
                  col = row.find_all('td')
                  if col != []:

                      date = col[0].text
                      revenue = col[1].text.replace(',', '').replace('$', '')
                      tesla_revenue = tesla_revenue.append({"Date": date, "Revenue":
↪revenue}, ignore_index=True)
```

```
-----
NameError                                Traceback (most recent call last)
/tmp/ipykernel_582/390878282.py in <module>
      1 tesla_revenue = pd.DataFrame(columns=['Data', 'Revenue'])
----> 2 for table in soup.find_all('table'):
      3     if ('Tesla Quarterly Revenue' in table.find('th').text):
      4         rows = table.find_all('tr')
      5         for row in rows:

NameError: name 'soup' is not defined
```

Execute the following line to remove the comma and dollar sign from the `Revenue` column.

```
[ ]: tesla_revenue["Revenue"] = tesla_revenue['Revenue'].str.replace(',|\$', "")
```

Execute the following lines to remove an null or empty strings in the `Revenue` column.

```
[ ]: tesla_revenue.dropna(inplace=True)

tesla_revenue = tesla_revenue[tesla_revenue['Revenue'] != ""]
```

Display the last 5 row of the `tesla_revenue` dataframe using the `tail` function. Take a screenshot of the results.

```
[28]: tesla_revenue.tail()
```

```
[28]: Empty DataFrame
      Columns: [Data, Revenue]
      Index: []
```

0.4 Question 3: Use yfinance to Extract Stock Data

Using the `Ticker` function enter the ticker symbol of the stock we want to extract data on to create a ticker object. The stock is GameStop and its ticker symbol is `GME`.

```
[29]: gme = yf.Ticker("GME")
```

Using the ticker object and the function `history` extract stock information and save it in a dataframe named `gme_data`. Set the `period` parameter to `max` so we get information for the maximum amount of time.

```
[30]: gme_data = gme.history(period="max")
```

Reset the index using the `reset_index(inplace=True)` function on the `gme_data` DataFrame and display the first five rows of the `gme_data` dataframe using the `head` function. Take a screenshot of the results and code from the beginning of Question 3 to the results below.

```
[31]: gme_data.reset_index(inplace=True)
      gme_data.head()
```

```
[31]:
```

	Date	Open	High	Low	Close	Volume	Dividends	\
0	2002-02-13	1.620129	1.693350	1.603296	1.691667	76216000	0.0	
1	2002-02-14	1.712707	1.716074	1.670626	1.683250	11021600	0.0	
2	2002-02-15	1.683250	1.687458	1.658001	1.674834	8389600	0.0	
3	2002-02-19	1.666418	1.666418	1.578047	1.607504	7410400	0.0	
4	2002-02-20	1.615920	1.662210	1.603296	1.662210	6892800	0.0	

```
      Stock Splits
0          0.0
1          0.0
2          0.0
3          0.0
4          0.0
```

0.5 Question 4: Use Webscraping to Extract GME Revenue Data

Use the `requests` library to download the webpage <https://cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud/IBMDeveloperSkillsNetwork-PY0220EN-SkillsNetwork/labs/project/stock.html>. Save the text of the response as a variable named `html_data`.

```
[32]: url = "https://cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud/
↳IBMDeveloperSkillsNetwork-PY0220EN-SkillsNetwork/labs/project/stock.html"
html_data = request.get(url).text
```

```
-----
NameError                                Traceback (most recent call last)
/tmp/ipykernel_582/588898464.py in <module>
      1 url = "https://cf-courses-data.s3.us.cloud-object-storage.appdomain.
↳cloud/IBMDeveloperSkillsNetwork-PY0220EN-SkillsNetwork/labs/project/stock.htm
----> 2 html_data = request.get(url).text

NameError: name 'request' is not defined
```

Parse the html data using beautiful_soup.

```
[33]: m
```

```
-----
NameError                                Traceback (most recent call last)
/tmp/ipykernel_582/1497821502.py in <module>
----> 1 m

NameError: name 'm' is not defined
```

Using BeautifulSoup or the `read_html` function extract the table with GameStop Quarterly Revenue and store it into a dataframe named `gme_revenue`. The dataframe should have columns Date and Revenue. Make sure the comma and dollar sign is removed from the Revenue column using a method similar to what you did in Question 2.

[Click here](#) if you need help locating the table

Below is the code to isolate the table, you will now need to loop through the rows and columns

```
soup.find_all("tbody")[1]
```

If you want to use the `read_html` function the table is located at index 1

```
[ ]:
```

Display the last five rows of the `gme_revenue` dataframe using the `tail` function. Take a screenshot of the results.

```
[34]: gme_revenue.tail()
```

```
-----
NameError                                Traceback (most recent call last)
```

```
/tmp/ipykernel_582/374026413.py in <module>
----> 1 gme_revenue.tail()
```

```
NameError: name 'gme_revenue' is not defined
```

0.6 Question 5: Plot Tesla Stock Graph

Use the `make_graph` function to graph the Tesla Stock Data, also provide a title for the graph. The structure to call the `make_graph` function is `make_graph(tesla_data, tesla_revenue, 'Tesla')`. Note the graph will only show data upto June 2021.

```
[35]: make_graph(tesla_data[['Date', 'Close']], tesla_revenue, 'Tesla')
```

```
-----
AttributeError                                Traceback (most recent call last)
/tmp/ipykernel_582/984300614.py in <module>
----> 1 make_graph(tesla_data[['Date', 'Close']], tesla_revenue, 'Tesla')

/tmp/ipykernel_582/2068038883.py in make_graph(stock_data, revenue_data, stock)
      2     fig = make_subplots(rows=2, cols=1, shared_xaxes=True,
    ↪ subplot_titles=("Historical Share Price", "Historical Revenue"),
    ↪ vertical_spacing = .3)
      3     stock_data_specific = stock_data[stock_data.Date <= '2021--06-14']
----> 4     revenue_data_specific = revenue_data[revenue_data.Date <=
    ↪ '2021-04-30']
      5     fig.add_trace(go.Scatter(x=pd.to_datetime(stock_data_specific.Date,
    ↪ infer_datetime_format=True), y=stock_data_specific.Close.astype("float"),
    ↪ name="Share Price"), row=1, col=1)
      6     fig.add_trace(go.Scatter(x=pd.to_datetime(revenue_data_specific.
    ↪ Date, infer_datetime_format=True), y=revenue_data_specific.Revenue.
    ↪ astype("float"), name="Revenue"), row=2, col=1)

~/conda/envs/python/lib/python3.7/site-packages/pandas/core/generic.py in
    ↪ __getattr__(self, name)
      5485         ):
      5486             return self[name]
-> 5487         return object.__getattribute__(self, name)
      5488
      5489     def __setattr__(self, name: str, value) -> None:

AttributeError: 'DataFrame' object has no attribute 'Date'
```

0.7 Question 6: Plot GameStop Stock Graph

Use the `make_graph` function to graph the GameStop Stock Data, also provide a title for the graph. The structure to call the `make_graph` function is `make_graph(gme_data, gme_revenue, 'GameStop')`. Note the graph will only show data upto June 2021.

[]:

About the Authors:

Joseph Santarcangelo has a PhD in Electrical Engineering, his research focused on using machine learning, signal processing, and computer vision to determine how videos impact human cognition. Joseph has been working for IBM since he completed his PhD.

Azim Hirjani

0.8 Change Log

Date (YYYY-MM-DD)	Version	Changed By	Change Description
2022-02-28	1.2	Lakshmi Holla	Changed the URL of GameStop
2020-11-10	1.1	Malika Singla	Deleted the Optional part
2020-08-27	1.0	Malika Singla	Added lab to GitLab

##

© IBM Corporation 2020. All rights reserved.