Seifa investigate

Swen Kuh

2024-02-26

```r
knitr::opts_chunk$set(dev = "png",
                      dpi = 300,
                      out.height = "300px",
                      out.width = "350px",
                      echo = FALSE,
                      cache = T)

## running marnie's model without fixed effects
library(here)
```

```
## here() starts at /Users/skuh0001/GitHub/covidMRP
```

```r
library(ggplot2)
library(tidyverse)
```

```
## -- Attaching core tidyverse packages ------------------------ tidyverse 2.0.0 --
## v dplyr     1.1.2     v readr     2.1.4
## v forcats   1.0.0     v stringr   1.5.0
## v lubridate 1.9.2     v tibble    3.2.1
## v purrr     1.0.1     v tidyr     1.3.0
```

```
## -- Conflicts ------------------------------------------ tidyverse_conflicts() --
## x dplyr::filter() masks stats::filter()
## x dplyr::lag()    masks stats::lag()
## i Use the conflicted package (<http://conflicted.r-lib.org/>) to force all conflicts to become errors
```

```r
library(arm)
```

```
## Loading required package: MASS
##
## Attaching package: 'MASS'
##
## The following object is masked from 'package:dplyr':
##
##     select
##
## Loading required package: Matrix
##
## Attaching package: 'Matrix'
##
## The following objects are masked from 'package:tidyr':
##
##     expand, pack, unpack
##
## Loading required package: lme4
```

```
##
## arm (Version 1.13-1, built: 2022-8-25)
##
## Working directory is /Users/skuh0001/GitHub/covidMRP/code/experiments/exp4
```

```r
library(cmdstanr)
```

```
## This is cmdstanr version 0.6.1.9000
## - CmdStanR documentation and vignettes: mc-stan.org/cmdstanr
## - CmdStan path: /Users/skuh0001/.cmdstan/cmdstan-2.34.1
## - CmdStan version: 2.34.1
```

```r
library(brms)
```

```
## Loading required package: Rcpp
## Loading 'brms' package (version 2.20.4). Useful instructions
## can be found by typing help('brms'). A more detailed introduction
## to the package is available through vignette('brms_overview').
##
## Attaching package: 'brms'
##
## The following object is masked from 'package:lme4':
##
##     ngrps
##
## The following object is masked from 'package:stats':
##
##     ar
```

```r
source(here("code/experiments/data_list.R"), echo=F)
```

```
## This is bayesplot version 1.10.0
## - Online documentation and vignettes at mc-stan.org/bayesplot
## - bayesplot theme set to bayesplot::theme_default()
##    * Does _not_ affect other ggplot2 plots
##    * See ?bayesplot_theme_set for details on theme setting
##
## Attaching package: 'bayesplot'
##
## The following object is masked from 'package:brms':
##
##     rhat
```

```r
options(mc.cores = 8)
stan_seifaInv_wd <-  'code/experiments/stan/seifa_investigate/'
stan_og_wd <- 'code/experiments/stan/'
func_wd <- 'code/experiments/'
res_wd <- 'results/experiments/exp4/'
res_seifaInv_wd <- 'results/experiments/exp4/seifa_investigate/'
res_noFEnoME_wd <- 'results/experiments/exp4/og_noFE_noME/'

# loading functions to store results
source(here(paste0(func_wd,'functions.R')))
```

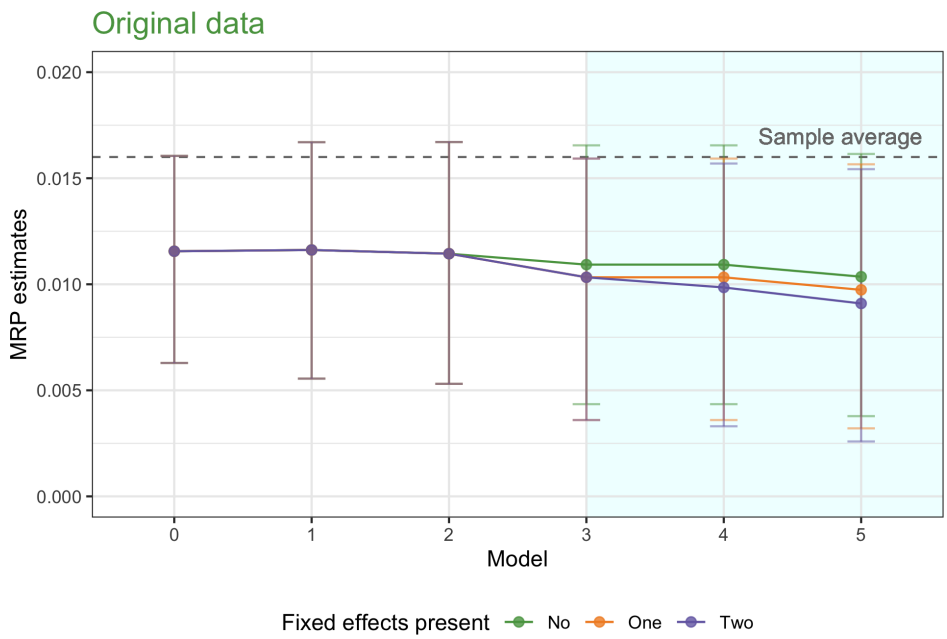

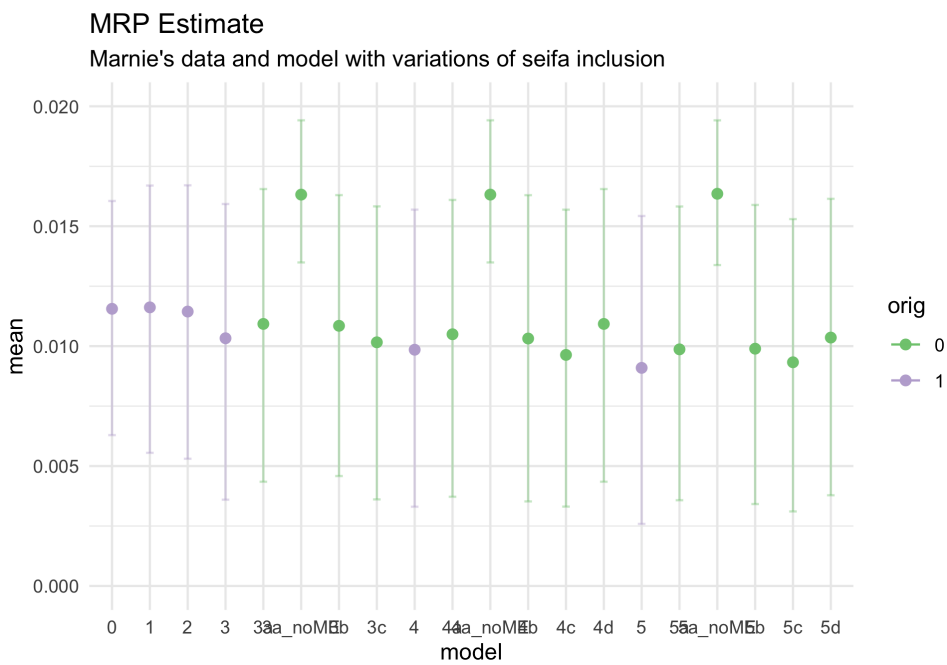
```
## `geom_line()`: Each group consists of only one observation.
## i Do you need to adjust the group aesthetic?
```