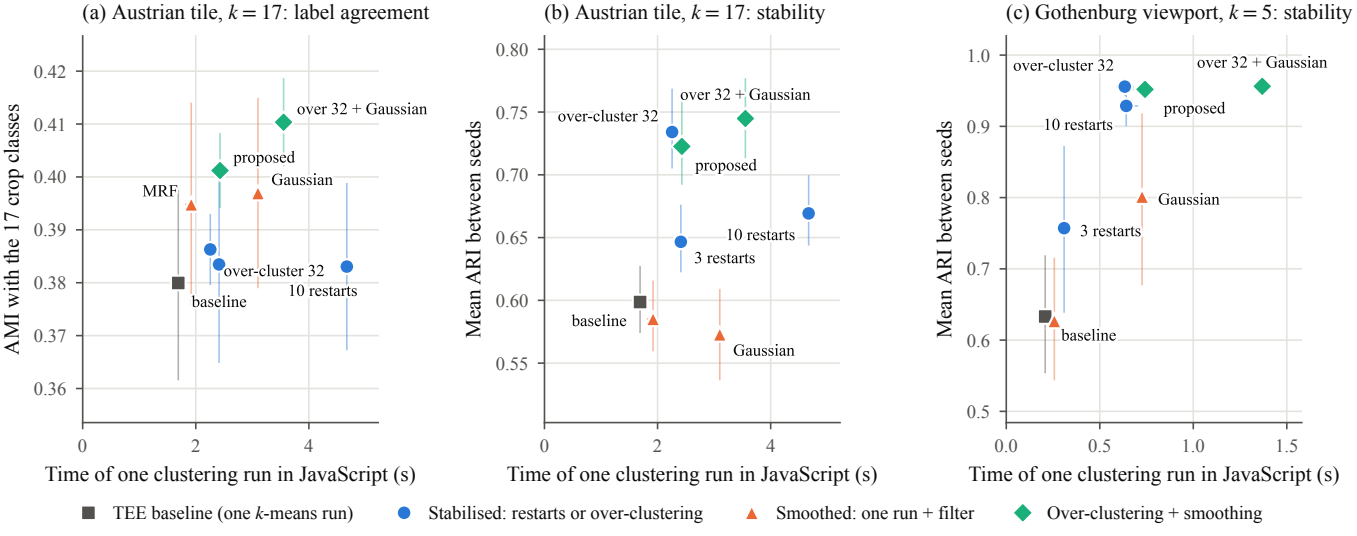

(a) Austrian tile, $k = 17$: label agreement
AMI with the 17 crop classes
Time of one clustering run in JavaScript (s)
over 32 + Gaussian
proposed
Gaussian
MRF
over-cluster 32
baseline
10 restarts
(b) Austrian tile, $k = 17$: stability
Mean ARI between seeds
Time of one clustering run in JavaScript (s)
over 32 + Gaussian
over-cluster 32
proposed
10 restarts
3 restarts
baseline
Gaussian
(c) Gothenburg viewport, $k = 5$: stability
Mean ARI between seeds
Time of one clustering run in JavaScript (s)
over-cluster 32
over 32 + Gaussian
proposed
10 restarts
Gaussian
3 restarts
baseline
TEE baseline (one k-means run)
Stabilised: restarts or over-clustering
Smoothed: one run + filter
Over-clustering + smoothing