

Session3 Crud Operations

1.

Create a MongoDB collection named 'restaurants' and use insertOne to add a new restaurant document with fields: name, cuisine, location, and rating.

```
> use foodieApp
< switched to db foodieApp
> db.createCollection("restuarants")
< { ok: 1 }
> db.restaurants.insertOne({

    name: "Burger Hub",

    cuisine: "Fast Food",

    location: "Ahmedabad",


    rating: 4.3

})
< {
  acknowledged: true,
  insertedId: ObjectId('6a3a56f01e00e4e7887b9e07')
}
```

2.

Use insertMany to add 3 new documents to the 'movies' collection, each representing a different movie with fields: title, genre, releaseYear, and imdbRating.

Hint: Think of movies currently trending on BookMyShow or Netflix.

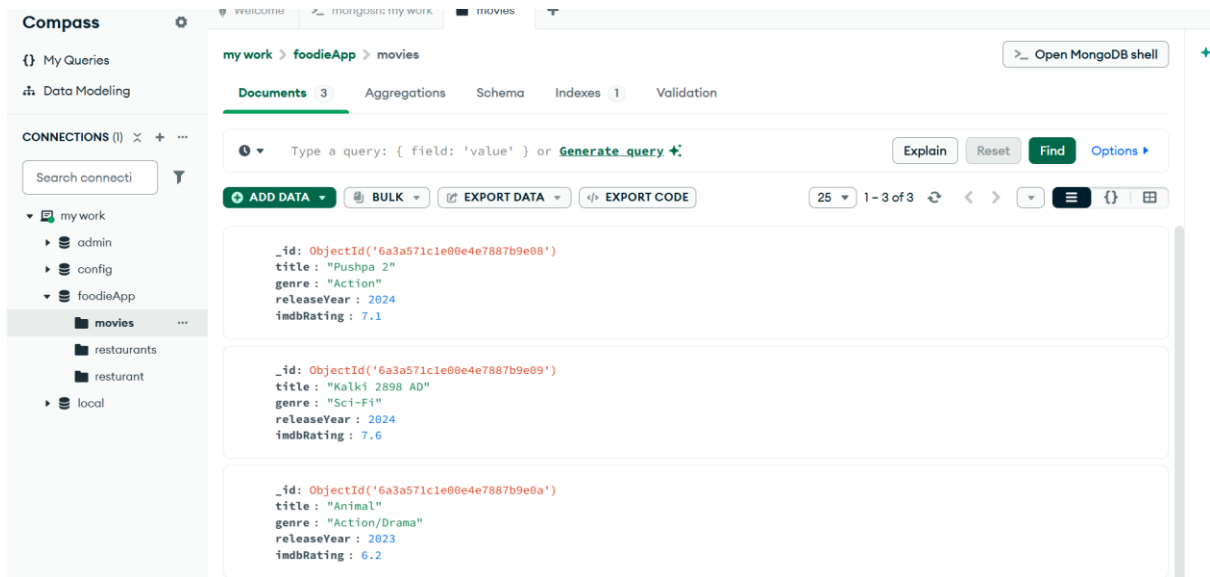


3.

Write a query using find to display all products from a 'flipkart_products' collection where the price is less than 1000.

```
> db.flipkart_products.find(
  price: { $lt: 1000 }
)
{
  "_id": ObjectId('6a3a58351e00e4e7887b9e0b'),
  "productName": 'Wireless Mouse',
  "price": 799
}
{
  "_id": ObjectId('6a3a58351e00e4e7887b9e0d'),
  "productName": 'USB Cable',
  "price": 299
}
```

4.

Update the rating of a restaurant named 'Burger Hub' in the 'restaurants' collection to 4.7 using updateOne.

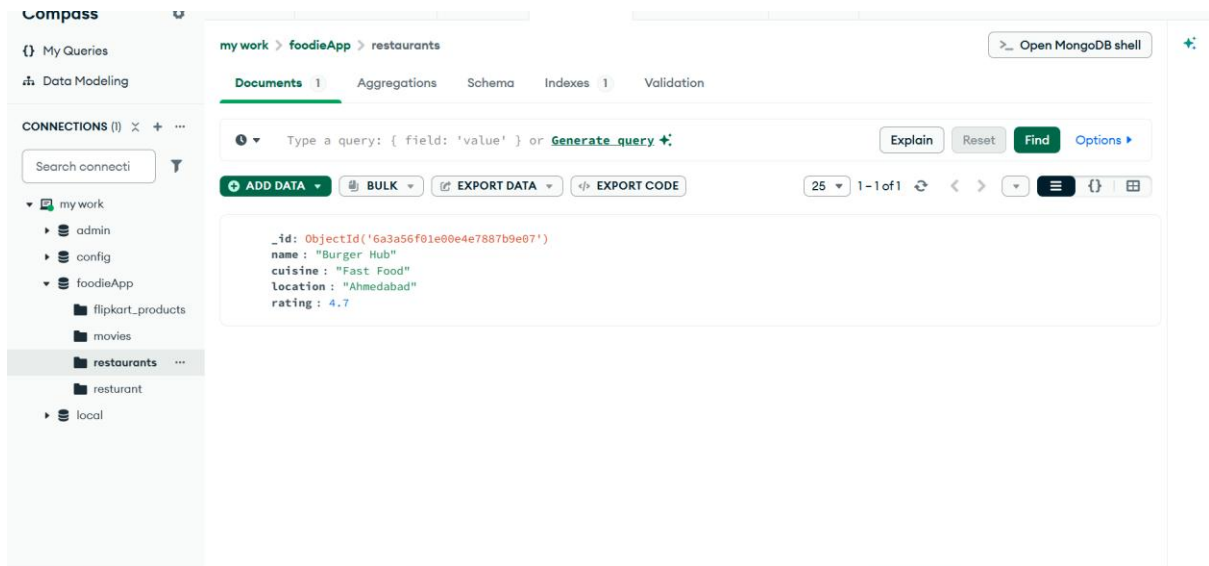

5.

Delete all orders from an 'orders' collection where the status is 'cancelled' using deleteMany.
 Constraint: Only delete documents with status exactly equal to 'cancelled'.

```

ling
< {
  acknowledged: true,
  insertedIds: {
    '0': ObjectId('6a3a5a5491d37c6473ed14ef'),
    '1': ObjectId('6a3a5a5491d37c6473ed14f0'),
    '2': ObjectId('6a3a5a5491d37c6473ed14f1')
  }
}
> db.orders.deleteMany({
  status: "cancelled"
})
< {
  acknowledged: true,
  deletedCount: 2
}
> db.orders.find()
< {
  _id: ObjectId('6a3a5a5491d37c6473ed14ef'),
  orderId: 101,
  status: 'completed'
}
foodieApp>

```