


Session2: Mongodb create drop Operations

1.


Open MongoDB shell and create a new database named `insta_clone_db`, then switch to it using the appropriate commands.

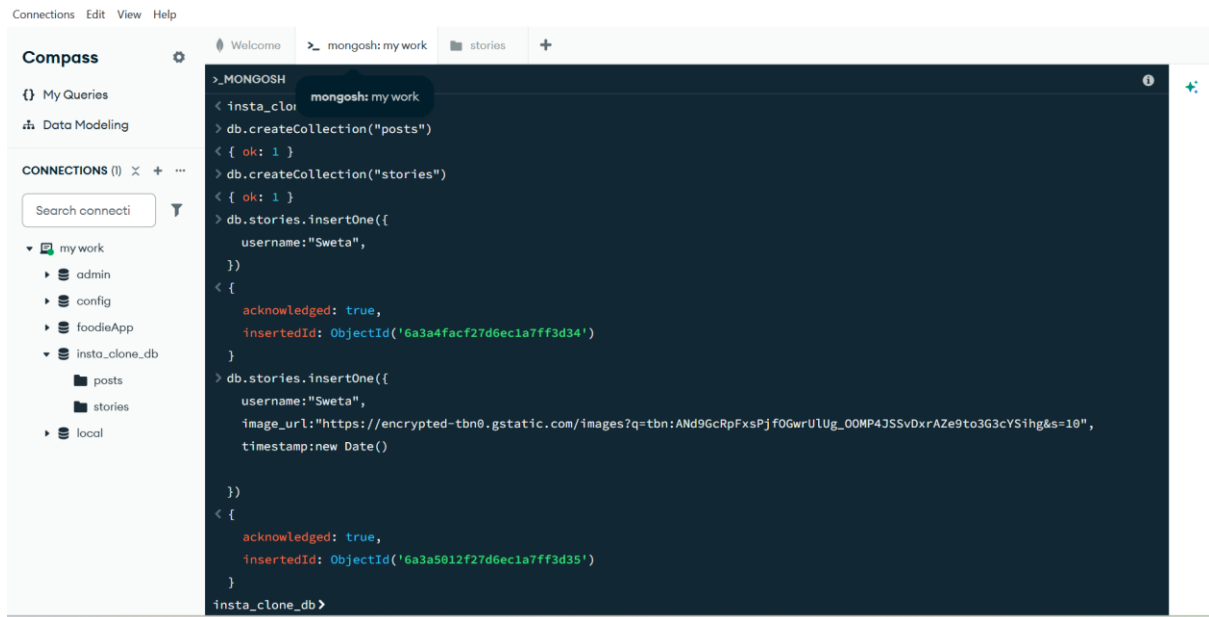

```
> MONGOSH
Welcome
> mongosh: my work
> use insta_clone_db
switched to db insta_clone_db
> db.createCollection("posts")
{ ok: 1 }
> db.createCollection("stories")
{ ok: 1 }
> db.stories.insertOne({
  username: "Sweta",
})
{
  acknowledged: true,
  insertedId: ObjectId('6a3a4facf27d6ec1a7ff3d34')
}
> db.stories.insertOne({
  username: "Sweta",
  image_url: "https://encrypted-tbn0.gstatic.com/images?q=tbn:ANd9GcRpFxsPjFOGwrULUg_00MP4JSSvDxrAZe9to3G3cYSihg&s=10",
  timestamp: new Date()
})
{
  acknowledged: true,
  insertedId: ObjectId('6a3a5012f27d6ec1a7ff3d35')
}
insta_clone_db>
```


2.

Inside `insta_clone_db`, create a collection called `posts` that will store Instagram-style photo posts.

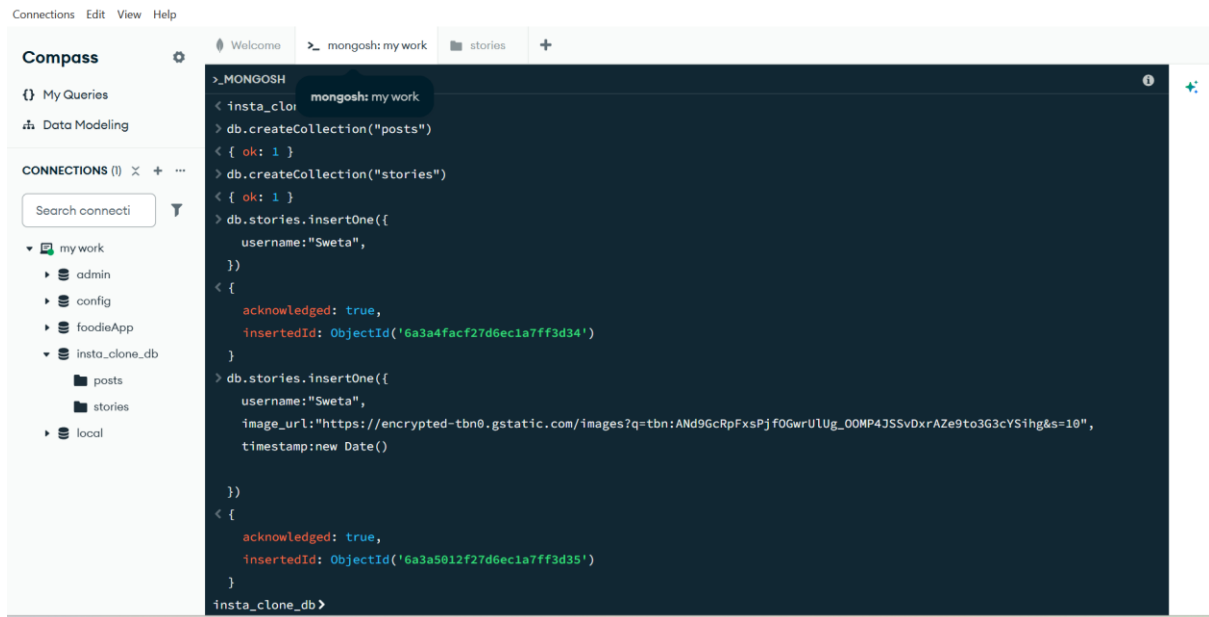

3.

Create another collection named stories in insta_clone_db, and insert a sample story document with fields: username, image_url, and timestamp.

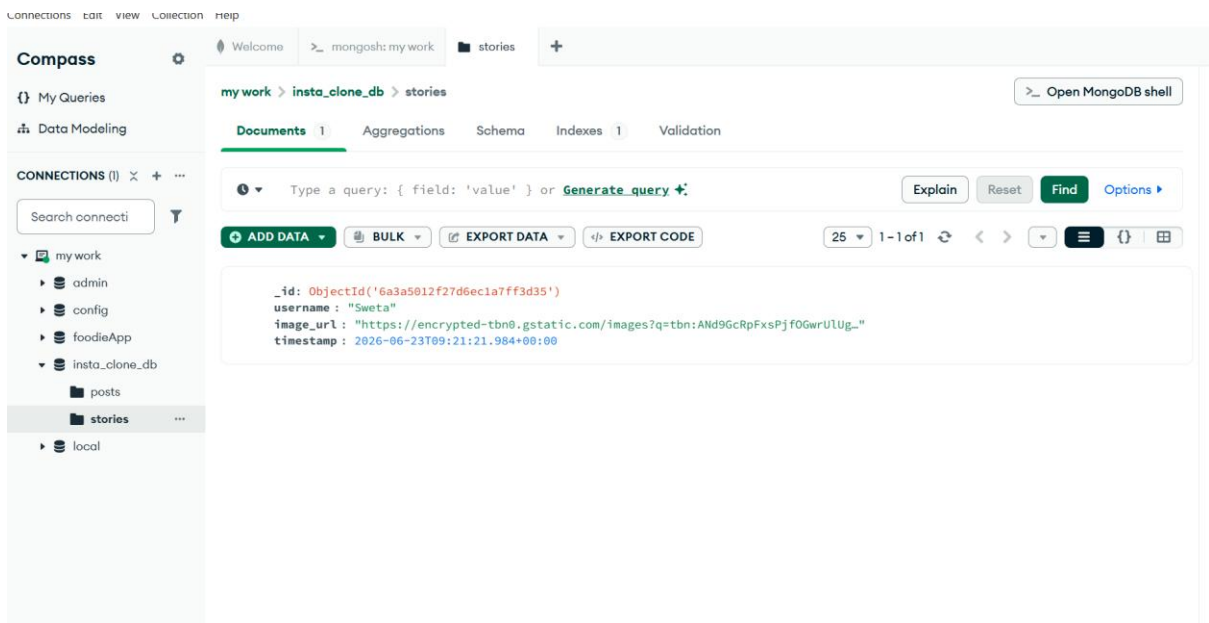

4.

Drop the stories collection from insta_clone_db and verify that it no longer exists.

Hint: Use the drop() method on the collection and show the result with show collections.

```

    })
  < {
    acknowledged: true,
    insertedId: ObjectId('6a3a5012f27d6ec1a7ff3d35')
  }
> db.stories.drop()
< true
insta_clone_db>

```

The screenshot shows the MongoDB CLI interface. On the left, the database structure is listed: myw... (expanded) contains admin, config, foodieApp, insta_clone_db (expanded), and local. The insta_clone_db database contains a posts collection. The main terminal area shows the following commands and output:

```

    acknowledged: true,
    insertedId: ObjectId('6a3a4facf27d6ec1a7ff3d34')
  }
> db.stories.insertOne({
  username:"Sweta",
  image_url:"https://encrypted-tbn0.gstatic.com/images?q=tbn:ANd9GcRpFxsPj f0GwrU1Ug_00MP4JSSvDxrAZe9to3G3cYSihg&s=10",
  timestamp:new Date()
})
< {
  acknowledged: true,
  insertedId: ObjectId('6a3a5012f27d6ec1a7ff3d35')
}
> db.stories.drop()
< true
> show collections
< posts
insta_clone_db>

```

5.

Drop the entire insta_clone_db database from MongoDB, then use the show dbs command to confirm it has been deleted.

The screenshot shows the MongoDB CLI interface. On the left, the database structure is listed: myw... (expanded) contains admin, config, foodieApp, and local. The main terminal area shows the following commands and output:

```

    acknowledged: true,
    insertedId: ObjectId('6a3a4facf27d6ec1a7ff3d34')
  }
> db.stories.insertOne({
  username:"Sweta",
  image_url:"https://encrypted-tbn0.gstatic.com/images?q=tbn:ANd9GcRpFxsPj f0GwrU1Ug_00MP4JSSvDxrAZe9to3G3cYSihg&s=10",
  timestamp:new Date()
})
< {
  acknowledged: true,
  insertedId: ObjectId('6a3a5012f27d6ec1a7ff3d35')
}
> db.stories.drop()
< true
> show collections
< posts
> db.dropDatabase("insta_clone_db")
< { ok: 1, dropped: 'insta_clone_db' }

```