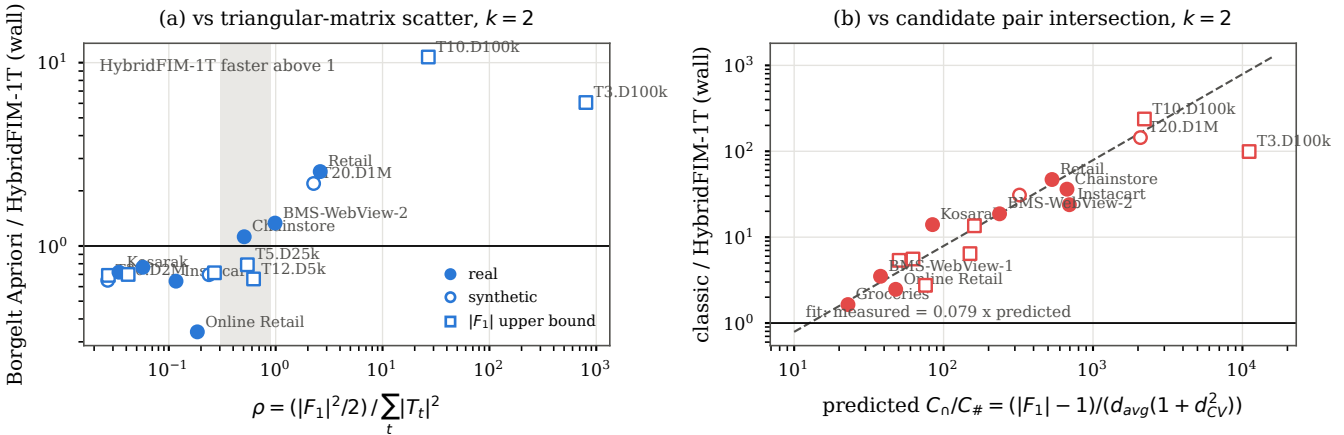
(a) vs triangular-matrix scatter, $k = 2$
HybridFIM-1T faster above 1
Borgelt Apriori / HybridFIM-1T (wall)
$\rho = (|F_1|^2/2) / \sum_t |T_t|^2$
T10.D100k
T3.D100k
Retail
T20.D1M
BMS-WebView-2
Chainstore
T5.D25k
T12.D5k
Kosarak
T10.D10M
Instacart
Online Retail
real
synthetic
$|F_1|$ upper bound
(b) vs candidate pair intersection, $k = 2$
classic / HybridFIM-1T (wall)
predicted $C_n/C_\# = (|F_1| - 1)/(d_{avg}(1 + d_{CV}^2))$
T10.D100k
T20.D1M
T3.D100k
Retail
Chainstore
Instacart
BMS-WebView-2
Kosarak
BMS-WebView-1
Online Retail
Groceries
fit: measured = 0.079 x predicted