

# Assessing deepSSF trajectories

Scott Forrest

2025-07-09

Now that we have generated trajectories using the `deepSSF_simulations.ipynb` script, we can check how well they capture different aspects of the observed data. This includes looking at the distribution of step lengths and turning angles, as well as comparing the observed and simulated trajectories in terms of the environmental covariates. We could also further summarise the trajectories using path-level summaries following a similar approach.

## Table of contents

|                                                                                                              |           |
|--------------------------------------------------------------------------------------------------------------|-----------|
| Loading packages . . . . .                                                                                   | 2         |
| <b>Reading in the environmental covariates</b>                                                               | <b>2</b>  |
| <b>Import observed buffalo data</b>                                                                          | <b>3</b>  |
| Calculate step info . . . . .                                                                                | 4         |
| To compare the observed buffalo data to the simulated data, select a subset of<br>the buffalo data . . . . . | 5         |
| Import multiple deep learning trajectories . . . . .                                                         | 5         |
| Calculate step lengths and turning angles etc . . . . .                                                      | 6         |
| Combine the observed and simulated datasets . . . . .                                                        | 8         |
| Prepare trajectories for plotting . . . . .                                                                  | 8         |
| Plot the observed and simulated trajectories . . . . .                                                       | 9         |
| <b>Plot movement distributions</b>                                                                           | <b>10</b> |
| Step lengths . . . . .                                                                                       | 10        |
| Log step lengths . . . . .                                                                                   | 12        |
| Turning angles . . . . .                                                                                     | 13        |
| Density of step lengths for each hour . . . . .                                                              | 14        |
| Density of turning angles for each hour . . . . .                                                            | 31        |
| <b>Extract covariate values</b>                                                                              | <b>43</b> |

|                                                              |           |
|--------------------------------------------------------------|-----------|
| <b>Hourly movement behaviour and selection of covariates</b> | <b>44</b> |
| Calculate the quantiles . . . . .                            | 45        |
| Summarise the background environmental covariates . . . . .  | 46        |
| Set up the plotting parameters . . . . .                     | 47        |
| <b>Hourly covariate selection</b>                            | <b>47</b> |
| Mean step lengths . . . . .                                  | 47        |
| NDVI . . . . .                                               | 49        |
| Canopy cover . . . . .                                       | 51        |
| Herbaceous vegetation . . . . .                              | 53        |
| Slope . . . . .                                              | 55        |
| Combining the hourly plots . . . . .                         | 58        |
| Step lengths instead of slope . . . . .                      | 59        |
| Slope instead of step lengths . . . . .                      | 60        |

## Loading packages

```
options(scipen = 999)

library(tidyverse)
packages <- c("amt", "sf", "terra", "beep", "tictoc", "viridis",
              "scales", "ggpubr", "zoo")
walk(packages, require, character.only = T)
```

## Reading in the environmental covariates

```
ndvi <- rast("mapping/cropped rasters/ndvi_GEE_projected_watermask20230207.tif")
canopy_cover <- rast("mapping/cropped rasters/canopy_cover.tif")
veg_herby <- rast("mapping/cropped rasters/veg_herby.tif")
slope <- rast("mapping/cropped rasters/slope_raster.tif")

# change the names (these will become the column names when extracting
# covariate values at the used and random steps)
names(ndvi) <- rep("ndvi", terra::nlyr(ndvi))
names(canopy_cover) <- "canopy_cover"
names(veg_herby) <- "veg_herby"
names(slope) <- "slope"

# for ggplot (and arbitrary index)
ndvi_df <- as.data.frame(ndvi[[1]], xy = TRUE)
# create discrete breaks for the NDVI for plotting
```

```
ndvi_quantiles <- quantile(ndvi_df$ndvi, probs = c(0.01, 0.99))
ndvi_breaks <- seq(ndvi_quantiles[1], ndvi_quantiles[2], length.out = 9)
ndvi_df$ndvi_discrete <- cut(ndvi_df$ndvi, breaks=ndvi_breaks, dig.lab = 2)
```

## Import observed buffalo data

```
buffalo <- read_csv("data/buffalo_clean.csv")
```


Rows: 115776 Columns: 4

```
-- Column specification -----
Delimiter: ","
dbl (3): x_, y_, id
dtm (1): t_
```

i Use ``spec()`` to retrieve the full column specification for this data.  
i Specify the column types or set ``show_col_types = FALSE`` to quiet this message.

```
attr(buffalo$t_, "tzone") <- "Australia/Queensland"
```

```
# plot the data of the buffalo that the deepSSF model was trained with
ggplot() +
  geom_point(data = buffalo |> filter(id == 2005),
            aes(x = x_, y = y_, colour = factor(id))) +
  scale_colour_viridis_d() +
  coord_equal() +
  theme_bw()
```

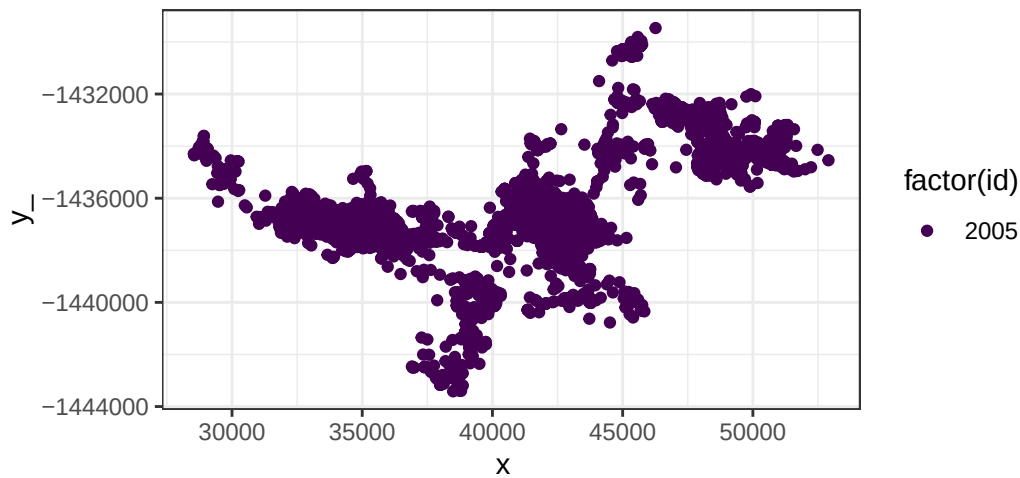

## Calculate step info

```
hourly_lag <- 1

buffalo <- buffalo %>% mutate(
  id = id,
  x1 = x_,
  y1 = y_,
  x2 = lead(x1, n = hourly_lag, default = NA),
  y2 = lead(y1, n = hourly_lag, default = NA),
  t1 = t_,
  t2 = lead(t1, n = hourly_lag, default = NA),
  time_diff = c(NA, diff(t_)/60), # time difference in minutes
  hour_t1 = lubridate::hour(t_),
  hour_t2 = lead(hour_t1, n = hourly_lag, default = NA),
  yday_t1 = lubridate::yday(t_), # day of the year
  yday_t2 = lead(yday_t1, n = hourly_lag, default = NA),
  sl = c(sqrt(diff(y_)^2 + diff(x_)^2), NA), # step lengths
  log_sl = log(sl),
  bearing = c(atan2(diff(y_), diff(x_)), NA),
  ta = c(NA, ifelse(
    diff(bearing) > pi, diff(bearing)-(2*pi), ifelse(
      diff(bearing) < -pi, diff(bearing)+(2*pi), diff(bearing))))), # turning angles
  cos_ta = cos(ta),

  .keep = "none"
)

head(buffalo)
```

```
# A tibble: 6 x 17
   id      x1      y1      x2      y2 t1          t2
<dbl> <dbl>   <dbl> <dbl>   <dbl> <dtm>      <dtm>
1  2005 41941. -1435875. 41969. -1.44e6 2018-07-25 10:04:02 2018-07-
25 11:04:23
2  2005 41969. -1435671. 41922. -1.44e6 2018-07-25 11:04:23 2018-07-
25 12:04:39
3  2005 41922. -1435654. 41779. -1.44e6 2018-07-25 12:04:39 2018-07-
25 13:04:17
4  2005 41779. -1435601. 41841. -1.44e6 2018-07-25 13:04:17 2018-07-
25 14:04:39
5  2005 41841. -1435635. 41655. -1.44e6 2018-07-25 14:04:39 2018-07-
25 15:04:27
```

```

6 2005 41655. -1435604. 41619. -1.44e6 2018-07-25 15:04:27 2018-07-
25 16:04:24
# i 10 more variables: time_diff <dbl>, hour_t1 <int>, hour_t2 <int>,
# yday_t1 <dbl>, yday_t2 <dbl>, sl <dbl>, log_sl <dbl>, bearing <dbl>,
# ta <dbl>, cos_ta <dbl>

```

**To compare the observed buffalo data to the simulated data, select a subset of the buffalo data**

```

no_subset_locations <- 3000 # to compare to the simulated data

buffalo_id_subset <- buffalo %>%
  # filter(id == 2005) %>%
  # arrange(t1) %>%
  # slice(1:no_subset_locations)

# hist(buffalo_id_subset$time_diff)

```

## Import multiple deep learning trajectories

```

# deepSSF model folder
deepSSF_dir <- "id2005_med_CNN_movement_2_2025-05-10"

# read in multiple csv files with similar filenames and bind them together
sim_data_full_list <-
  list.files(paste0("Python/outputs/model_training/", deepSSF_dir, "/simulations/deepSSF_trajectories/"),
            full.names = TRUE)

length(sim_data_full_list)

```

```
[1] 50
```

```

# to filter filenames with any string matching conditions
sim_data_filenames <- grep(".", sim_data_full_list, value = T) %>%
  # grep("3000steps", x = ., value = T)

# read dataframes as a single dataframe with id identifier
sim_data_all <- sim_data_filenames %>%
  map_dfr(read_csv, .id = "id") %>%
  mutate(
    ...1 = NULL
  )

```

```
)

sim_data_all

# A tibble: 150,000 x 6
   id      x      y hour yday bearing
  <chr> <dbl>   <dbl> <dbl> <dbl>   <dbl>
1 1      41969. -1435671     0   206   -2.86
2 1      41856. -1435879     1   206   -2.07
3 1      42373. -1436237     2   206   -0.605
4 1      42356. -1436233     3   206    2.95
5 1      42357. -1436241     4   206   -1.43
6 1      42367. -1436234     5   206    0.593
7 1      42366. -1436245     6   206   -1.74
8 1      42462. -1436232     7   206    0.130
9 1      42464. -1436242     8   206   -1.34
10 1      42291. -1436407     9   206   -2.38
# i 149,990 more rows
```

## Calculate step lengths and turning angles etc

```
hourly_lag <- 1

# Nest the data by 'id'
sim_data_nested <- sim_data_all %>%
  group_by(id) %>%
  nest()

# Map the mutate transformation over each nested tibble
sim_data_nested <- sim_data_nested %>%
  mutate(data = map(data, ~ .x %>%
    mutate(
      x1 = x,
      y1 = y,
      x2 = lead(x1, n = hourly_lag, default = NA),
      y2 = lead(y1, n = hourly_lag, default = NA),
      date = as.Date(yday - 1, origin = "2018-01-01"),
      t1 = as.POSIXct(paste(date, hour), format = "%Y-%m-%d %H"),
      t2 = lead(t1, n = hourly_lag, default = NA),
      yday_t1 = lubridate::yday(t1), # day of the year
      yday_t2 = lead(yday_t1, n = hourly_lag, default = NA),
      hour_t1 = lubridate::hour(t1),
```

```

    hour_t2 = lead(hour_t1, n = hourly_lag, default = NA),
    sl = c(sqrt(diff(y)^2 + diff(x)^2), NA), # step lengths
    log_sl = log(sl),
    bearing = c(atan2(diff(y), diff(x)), NA),
    ta = c(NA, ifelse(
      diff(bearing) > pi, diff(bearing) - (2 * pi),
      ifelse(diff(bearing) < -pi, diff(bearing) + (2 * pi), diff(bearing))
    )),
    cos_ta = cos(ta),

    .keep = "none"
  )
))

# Unnest the transformed data back into a single data frame
sim_data_all <- sim_data_nested %>%
  unnest(data) %>%
  ungroup() %>%
  mutate(id = as.numeric(id))

head(sim_data_all)

```

```

# A tibble: 6 x 17
   id bearing   x1      y1    x2      y2 date      t1
  <dbl>   <dbl> <dbl>   <dbl> <dbl>   <dbl> <date>   <dtm>
1     1   -2.07 41969. -1435671 41856. -1435879. 2018-07-25 2018-07-
25 00:00:00
2     1   -0.605 41856. -1435879. 42373. -1436237. 2018-07-25 2018-07-
25 01:00:00
3     1    2.95 42373. -1436237. 42356. -1436233. 2018-07-25 2018-07-
25 02:00:00
4     1   -1.43 42356. -1436233. 42357. -1436241. 2018-07-25 2018-07-
25 03:00:00
5     1    0.593 42357. -1436241. 42367. -1436234. 2018-07-25 2018-07-
25 04:00:00
6     1   -1.74 42367. -1436234. 42366. -1436245. 2018-07-25 2018-07-
25 05:00:00
# i 9 more variables: t2 <dtm>, yday_t1 <dbl>, yday_t2 <dbl>, hour_t1 <int>,
#   hour_t2 <int>, sl <dbl>, log_sl <dbl>, ta <dbl>, cos_ta <dbl>

```

## Combine the observed and simulated datasets

```
all_data <- bind_rows(buffalo_id_subset, sim_data_all)
head(all_data)
```

```
# A tibble: 6 x 18
   id      x1      y1      x2      y2 t1          t2
  <dbl> <dbl>   <dbl> <dbl>   <dbl> <dtm>      <dtm>
1  2005 41941. -1435875. 41969. -1.44e6 2018-07-25 10:04:02 2018-07-
25 11:04:23
2  2005 41969. -1435671. 41922. -1.44e6 2018-07-25 11:04:23 2018-07-
25 12:04:39
3  2005 41922. -1435654. 41779. -1.44e6 2018-07-25 12:04:39 2018-07-
25 13:04:17
4  2005 41779. -1435601. 41841. -1.44e6 2018-07-25 13:04:17 2018-07-
25 14:04:39
5  2005 41841. -1435635. 41655. -1.44e6 2018-07-25 14:04:39 2018-07-
25 15:04:27
6  2005 41655. -1435604. 41619. -1.44e6 2018-07-25 15:04:27 2018-07-
25 16:04:24
# i 11 more variables: time_diff <dbl>, hour_t1 <int>, hour_t2 <int>,
#   yday_t1 <dbl>, yday_t2 <dbl>, sl <dbl>, log_sl <dbl>, bearing <dbl>,
#   ta <dbl>, cos_ta <dbl>, date <date>
```

## Prepare trajectories for plotting

```
# set a buffer around the minimum and maximum x and y values
buffer <- 2500

# set the extent of the plot
plot_extent <- all_data %>% filter(id %in% 1:5) %>%
  summarise(min_x = min(x1) - 2500, min_y = min(y1) - 2500, max_x = max(x1) + 2500, max_y =
  # Remove cells outside the extent of the simulated locations (with the buffer)
ndvi_df <- ndvi_df %>%
  filter(x >= plot_extent[[1]] & x <= plot_extent[[3]] &
         y >= plot_extent[[2]] & y <= plot_extent[[4]]) %>%
  mutate(
    x_scaled = (x - plot_extent[[1]])/1000,
    y_scaled = (y - plot_extent[[2]])/1000
  )
```



```
# Scale the x and y coordinates of the observed and simulated data
all_data <- all_data %>%
  mutate(
    x1_scaled = (x1 - plot_extent[[1]])/1000,
    y1_scaled = (y1 - plot_extent[[2]])/1000
  )
```

## Plot the observed and simulated trajectories

```
ggplot() +

  geom_raster(data = ndvi_df,
             aes(x = x_scaled, y = y_scaled, fill = ndvi_discrete),
             alpha = 0.75) +
  scale_fill_brewer("ndvi", palette = "Greys",
                  guide = guide_legend(reverse = TRUE)) +

  geom_path(data = all_data %>% filter(id %in% 1:5),
           aes(x = x1_scaled, y = y1_scaled, colour = as.factor(id)),
           alpha = 0.75, linewidth = 0.25) +

  scale_colour_viridis_d() +


  geom_path(data = all_data %>% filter(id == 2005),
           aes(x = x1_scaled, y = y1_scaled),
           alpha = 0.75, linewidth = 0.25, colour = "red") +

  geom_point(data = all_data %>% slice(1),
            aes(x = x1_scaled, y = y1_scaled), fill = "blue", shape = 23) +

  scale_x_continuous("Easting (km)",
                    expand = c(0, 0)) +
  scale_y_continuous("Northing (km)",
                    expand = c(0, 0)) +

  coord_equal() +
  theme_bw() +
  theme(legend.position = "none")
```

Warning: Removed 70627 rows containing missing values or values outside the scale range (`geom\_raster()`).

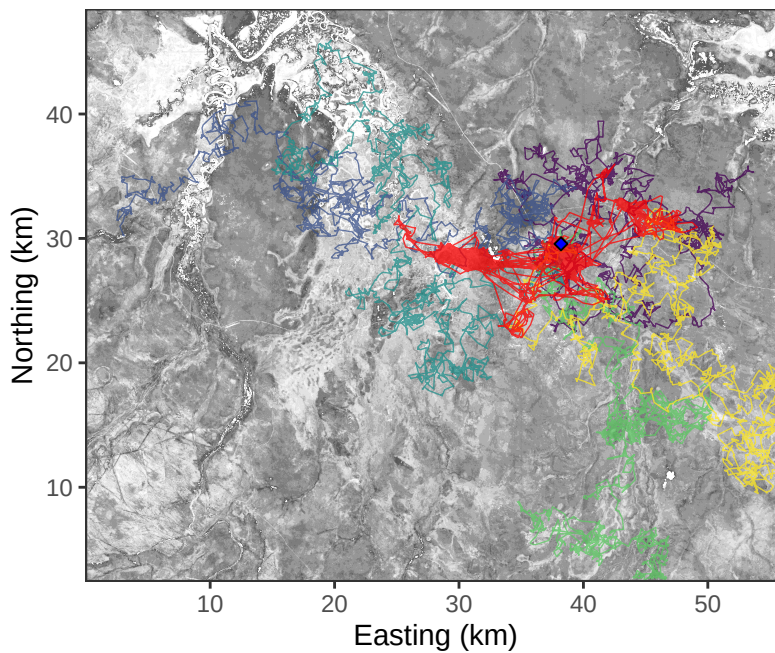

```
ggsave(paste0("Python/outputs/model_training/",deepSSF_dir,"/simulated_trajectories.png"), w
```

Warning: Removed 70627 rows containing missing values or values outside the scale range (`geom\_raster()`).

## Plot movement distributions

The skyblue density plot represents the observed data and the orange density plot represents the simulated data.

## Step lengths

```
cell_widths <- data.frame(x = c(0, 12.5, seq(37.5, 1785, by = 25)), y = 0)

step_lengths_stationary <- ggplot() +
  # geom_vline(data = cell_widths,
  #           aes(xintercept = x),
  #           colour = "black", linetype = "dashed", alpha = 0.5) +
  geom_density(data = all_data %>% filter(id == 2005),
               aes(x = sl),
               fill = "skyblue", colour = "skyblue", alpha = 0.5) +
  geom_density(data = all_data %>% filter(!id == 2005),
```

```


aes(x = sl),
fill = "orange", colour = "orange", alpha = 0.5) +
scale_x_continuous("Step length (m)", limits = c(0, 1500)) +
scale_y_continuous("Density") +
theme_bw()

step_lengths_stationary

```

Warning: Removed 147 rows containing non-finite outside the scale range  
(`stat\_density()`).

Warning: Removed 3703 rows containing non-finite outside the scale range  
(`stat\_density()`).

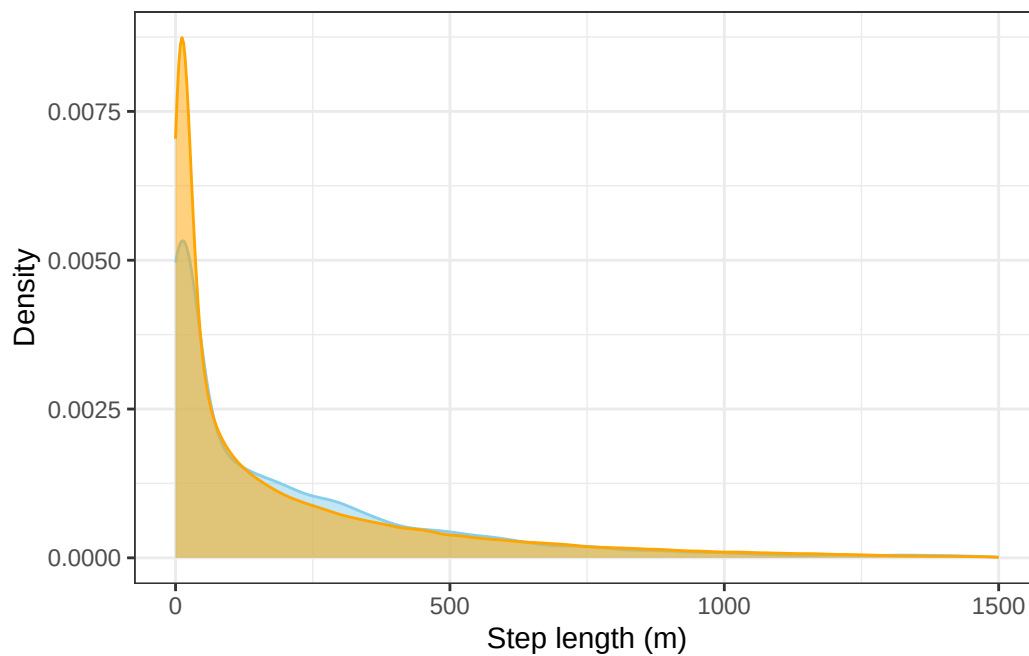

```

ggsave(paste0("Python/outputs/model_training/",deepSSF_dir,"/step_lengths.png"), width=150,

```

Warning: Removed 147 rows containing non-finite outside the scale range  
(`stat\_density()`).


Removed 3703 rows containing non-finite outside the scale range  
(`stat\_density()`).

## Log step lengths

```
step_lengths_log <- ggplot() +  
  geom_vline(data = cell_widths,  
            aes(xintercept = x),  
            colour = "black", linetype = "dashed", alpha = 0.5) +  
  geom_density(data = all_data %>% filter(id == 2005),  
              aes(x = sl),  
              fill = "skyblue", colour = "skyblue", alpha = 0.5) +  
  geom_density(data = all_data %>% filter(!id == 2005),  
              aes(x = sl),  
              fill = "orange", colour = "orange", alpha = 0.5) +  
  scale_x_log10("log Step length (m)") +  
  scale_y_continuous("Density") +  
  theme_bw()  
  
step_lengths_log
```

Warning in scale\_x\_log10("log Step length (m)": log-10 transformation introduced infinite values.

Warning: Removed 51 rows containing non-finite outside the scale range (`stat\_density()`).

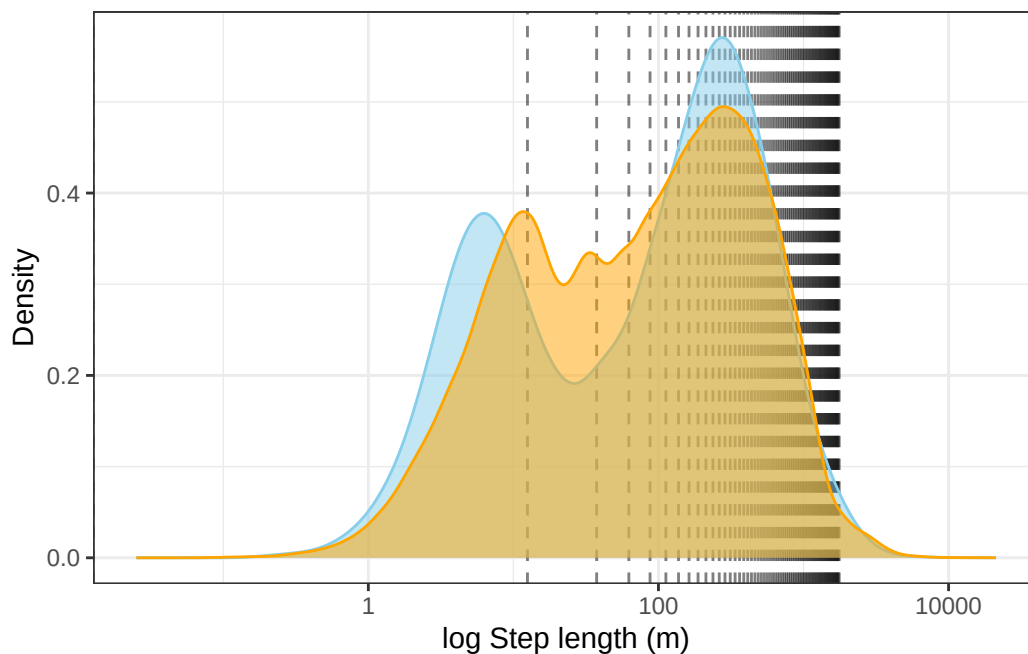

```
ggsave(paste0("Python/outputs/model_training/",deepSSF_dir,"/log_sl.png"), width=150, height=150)
```

```
Warning in scale_x_log10("log Step length (m)": log-10 transformation introduced infinite values in density
Removed 51 rows containing non-finite outside the scale range
(`stat_density()`).
```


## Turning angles

```
turning_angles_stationary <- ggplot() +
  geom_density(data = all_data %>% filter(id == 2005),
    aes(x = ta),
    fill = "skyblue", colour = "skyblue", alpha = 0.5) +
  geom_density(data = all_data %>% filter(!id == 2005),
    aes(x = ta),
    fill = "orange", colour = "orange", alpha = 0.5) +
  scale_x_continuous("Turning angle (radians)") +
  scale_y_continuous("Density") +
  theme_bw()

turning_angles_stationary
```

```
Warning: Removed 1 row containing non-finite outside the scale range
(`stat_density()`).
```

```
Warning: Removed 101 rows containing non-finite outside the scale range
(`stat_density()`).
```

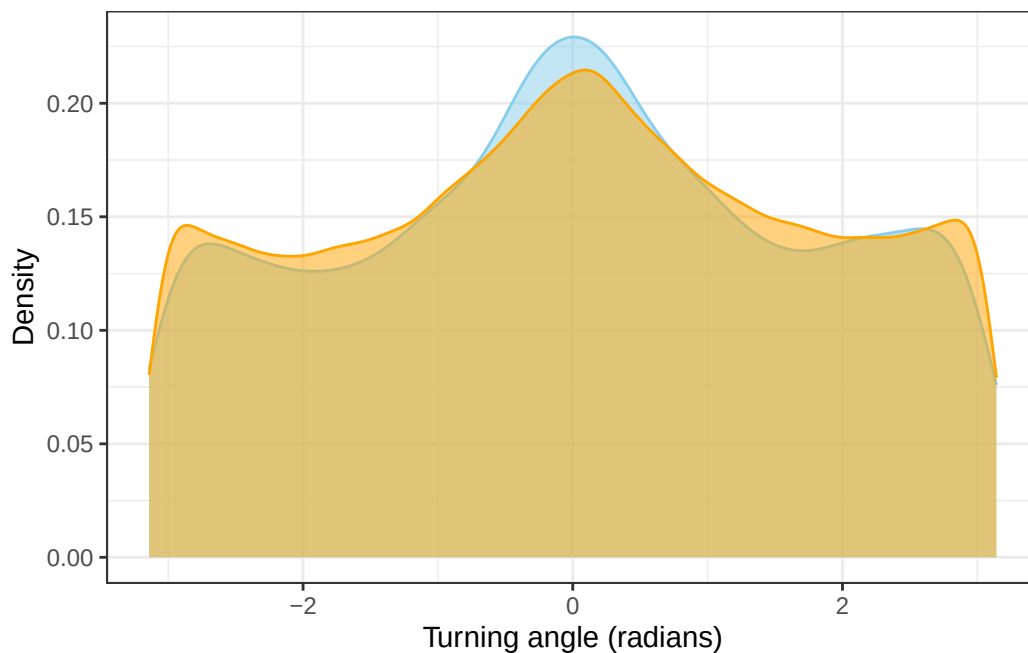

```
ggsave(paste0("Python/outputs/model_training/",deepSSF_dir,"/turning_angles.png"), width=120
```

Warning: Removed 1 row containing non-finite outside the scale range (`stat\_density()`).


Removed 101 rows containing non-finite outside the scale range (`stat\_density()`).

## Density of step lengths for each hour

```
for(i in 0:23) {
  print(ggplot() +
    geom_density(data = all_data %>% filter(id == 2005 & hour_t1 == i),
      aes(x = sl),
      fill = "skyblue", colour = "black", alpha = 0.5) +
    geom_density(data = all_data %>% filter(!id == 2005 & hour_t1 == i),
      aes(x = sl),
      fill = "orange", colour = "black", alpha = 0.5) +
    scale_x_continuous("Step length (m)", limits = c(0, 1500)) +
    ggtitle(paste0("Hour: ", i)) +
    theme_bw())
}
```


Warning: Removed 3 rows containing non-finite outside the scale range (`stat\_density()`).

Warning: Removed 52 rows containing non-finite outside the scale range  
(`stat\_density()`).

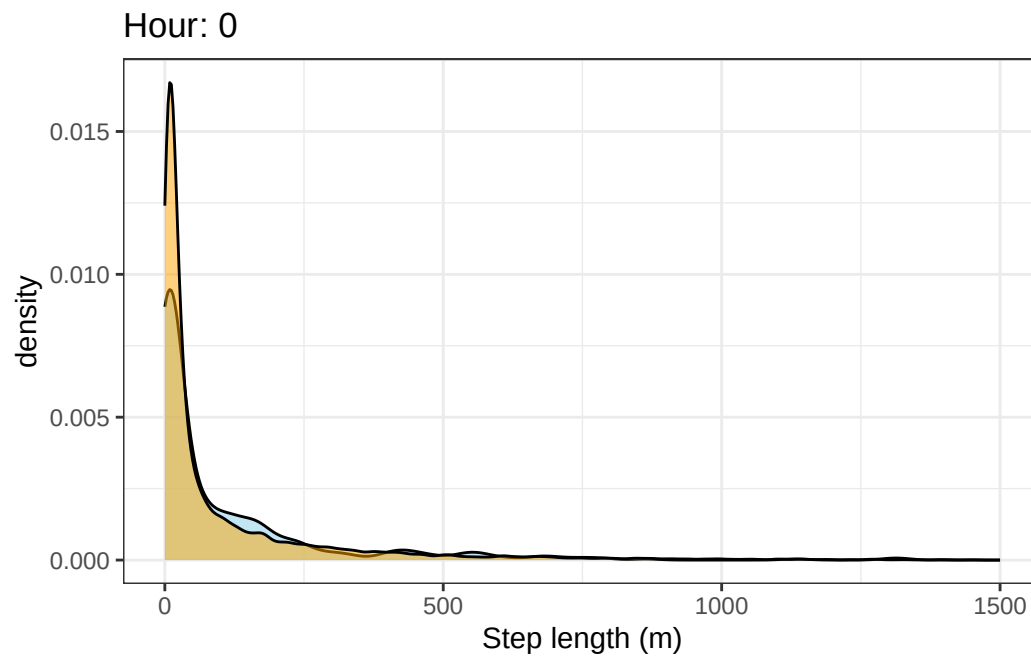


Warning: Removed 5 rows containing non-finite outside the scale range  
(`stat\_density()`).

Warning: Removed 35 rows containing non-finite outside the scale range  
(`stat\_density()`).

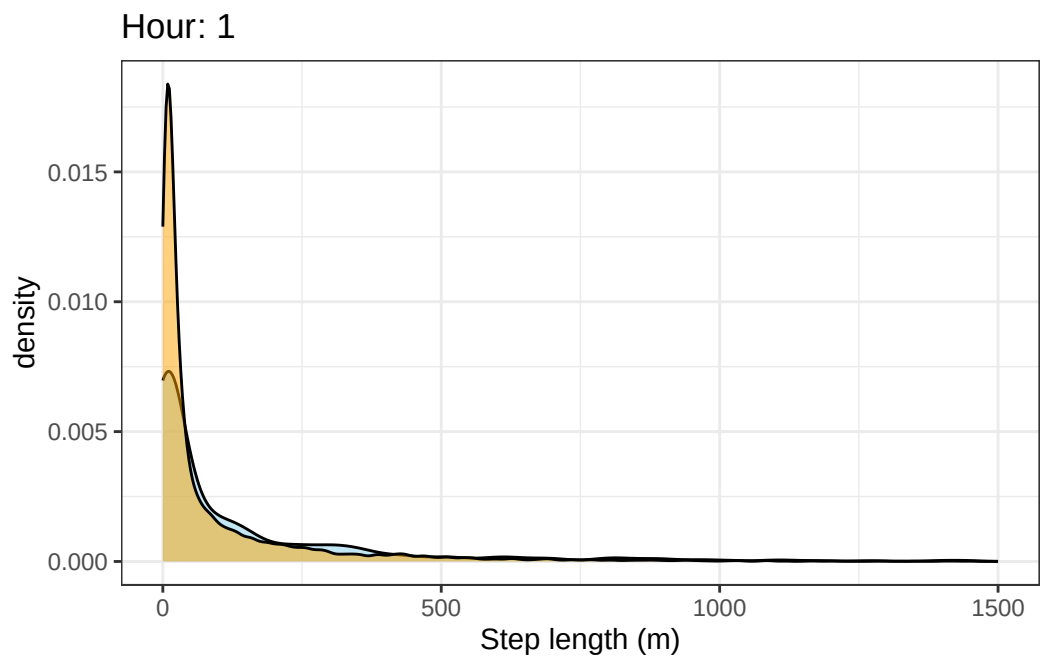

Warning: Removed 5 rows containing non-finite outside the scale range (``stat_density()``).


Warning: Removed 36 rows containing non-finite outside the scale range (``stat_density()``).

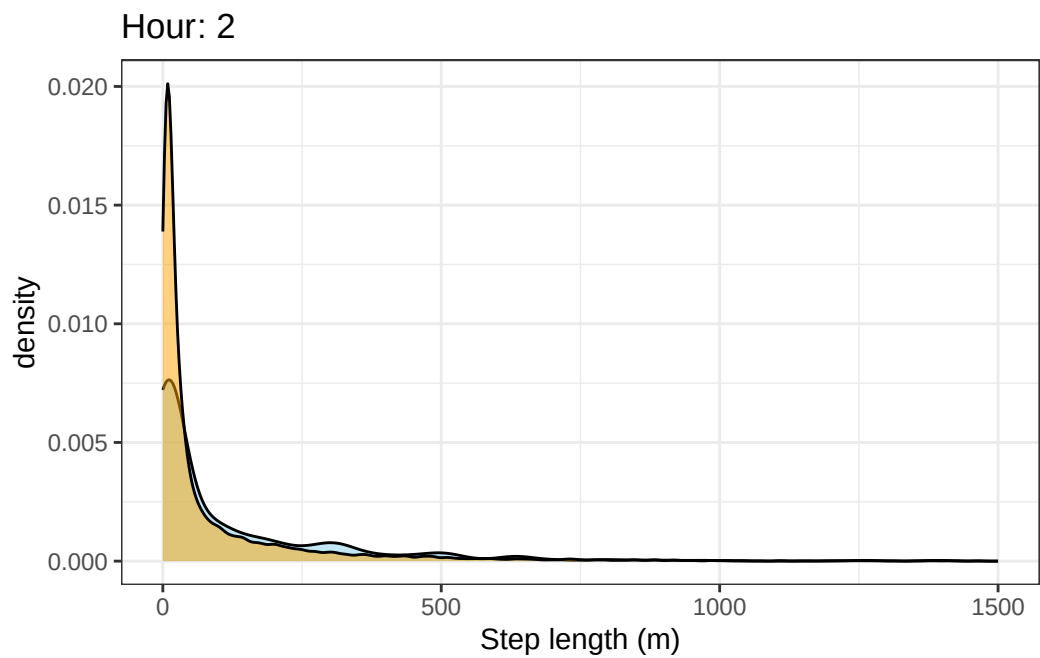




Warning: Removed 6 rows containing non-finite outside the scale range  
(`stat\_density()`).

Warning: Removed 39 rows containing non-finite outside the scale range  
(`stat\_density()`).

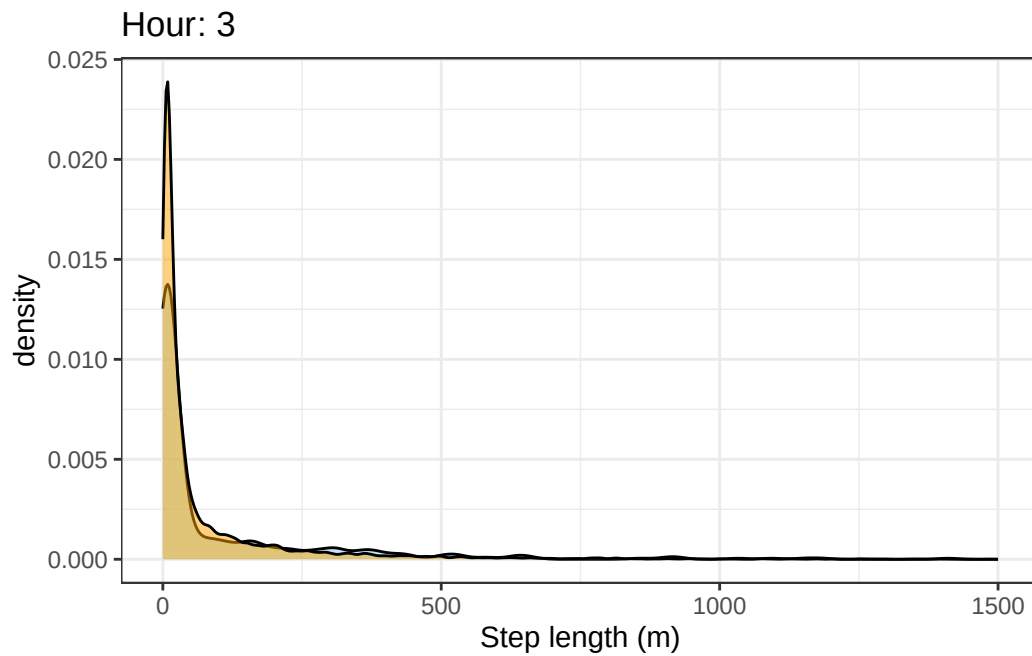


Warning: Removed 2 rows containing non-finite outside the scale range  
(`stat\_density()`).

Removed 39 rows containing non-finite outside the scale range  
(`stat\_density()`).

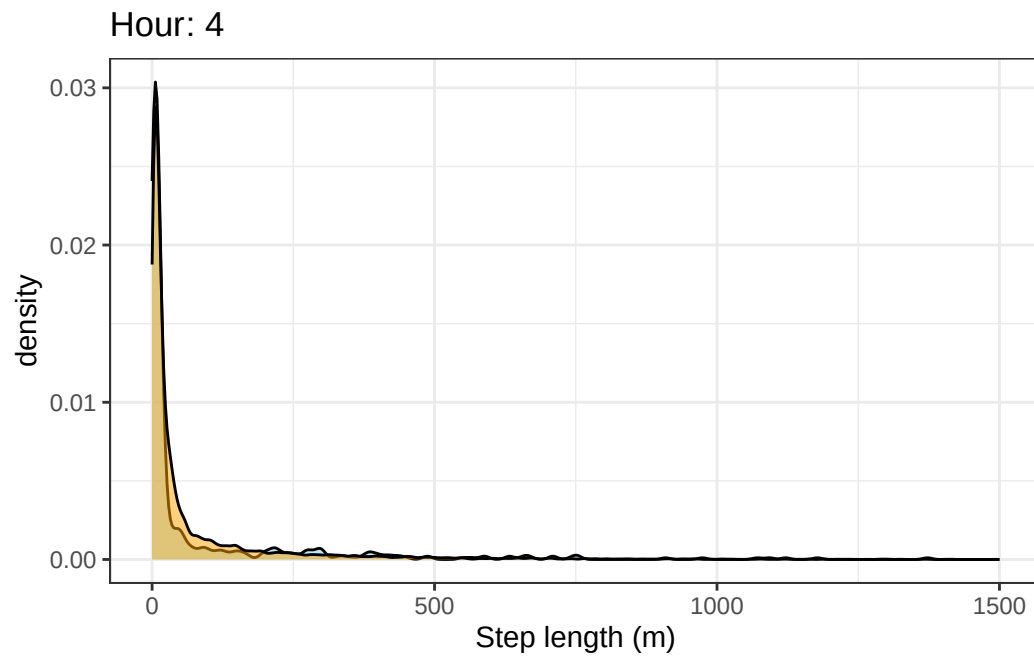


Warning: Removed 7 rows containing non-finite outside the scale range  
(`stat\_density()`).

Warning: Removed 78 rows containing non-finite outside the scale range  
(`stat\_density()`).

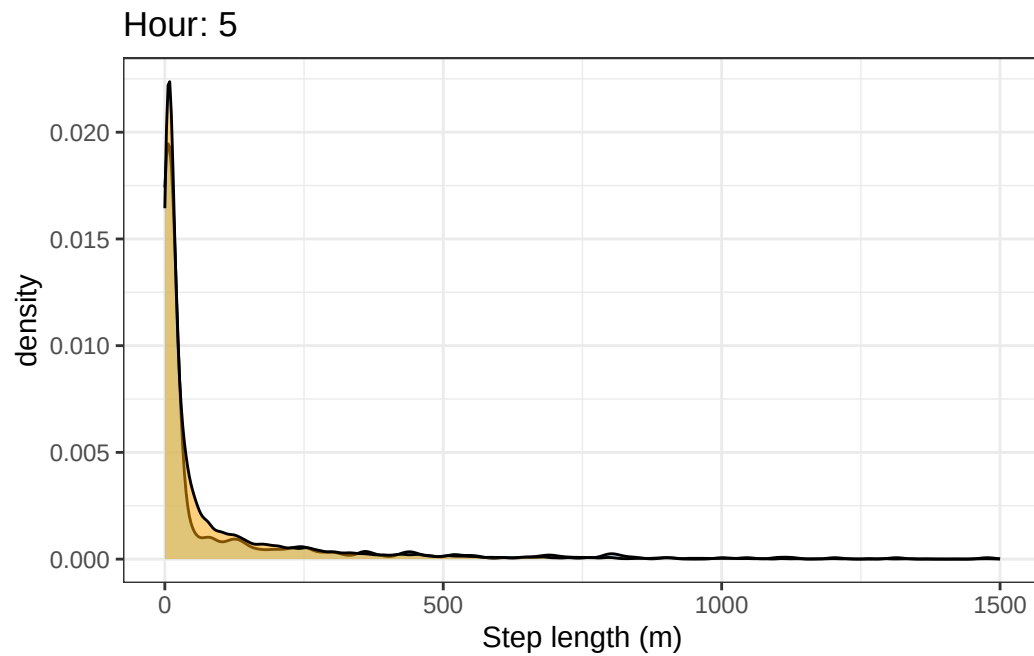


Warning: Removed 12 rows containing non-finite outside the scale range  
(`stat\_density()`).

Warning: Removed 199 rows containing non-finite outside the scale range  
(`stat\_density()`).

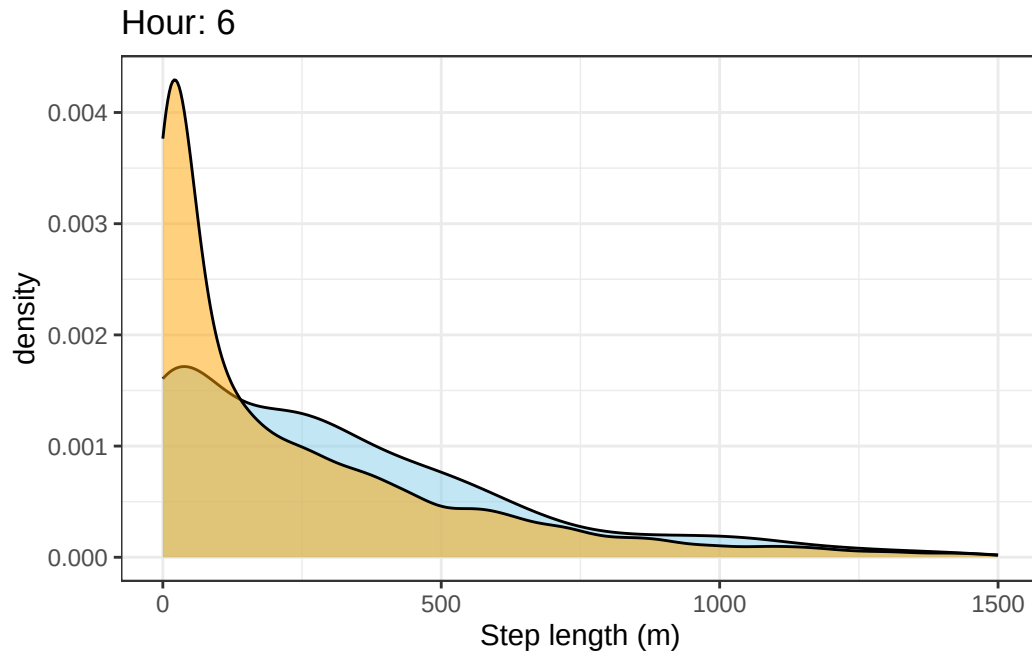


Warning: Removed 15 rows containing non-finite outside the scale range  
(`stat\_density()`).

Warning: Removed 320 rows containing non-finite outside the scale range  
(`stat\_density()`).

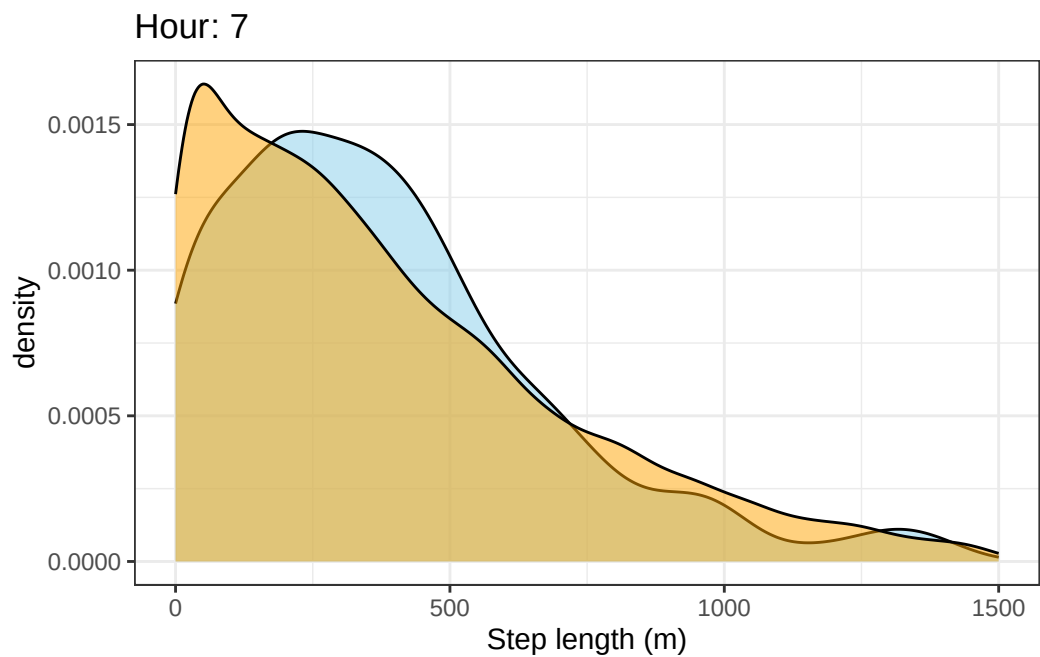


Warning: Removed 18 rows containing non-finite outside the scale range  
(`stat\_density()`).

Warning: Removed 377 rows containing non-finite outside the scale range  
(`stat\_density()`).

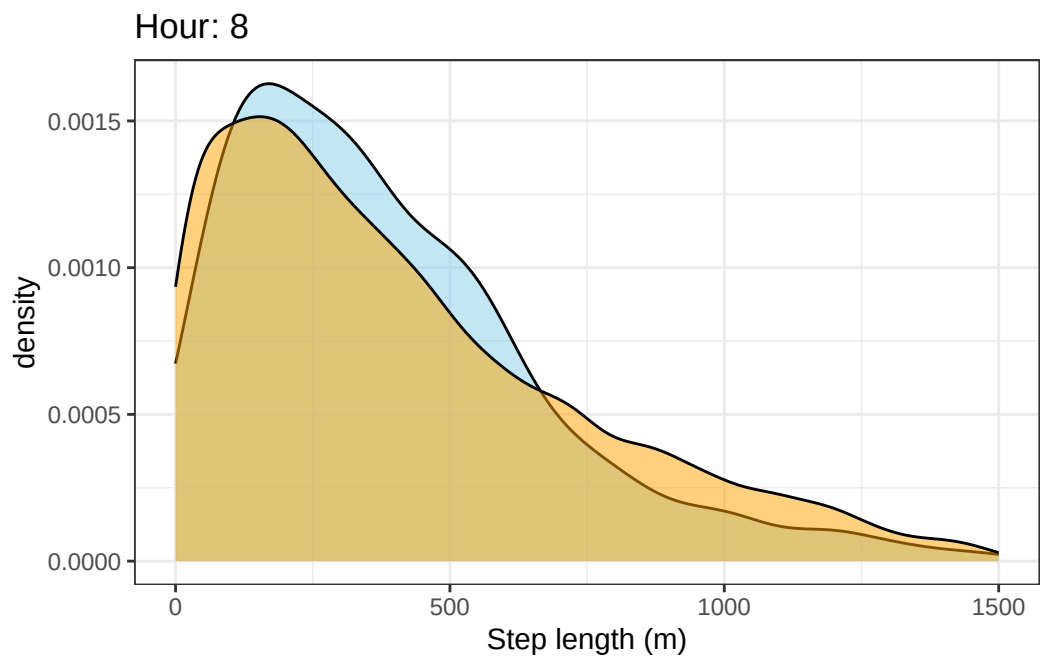


Warning: Removed 6 rows containing non-finite outside the scale range  
(`stat\_density()`).

Warning: Removed 266 rows containing non-finite outside the scale range  
(`stat\_density()`).

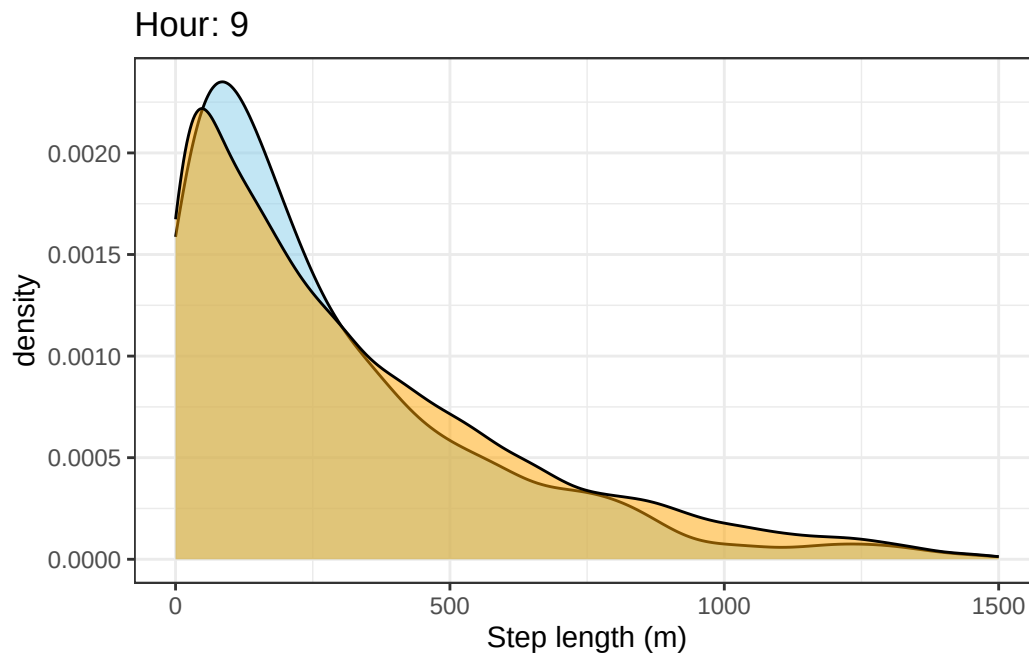


Warning: Removed 3 rows containing non-finite outside the scale range  
(`stat\_density()`).

Warning: Removed 164 rows containing non-finite outside the scale range  
(`stat\_density()`).

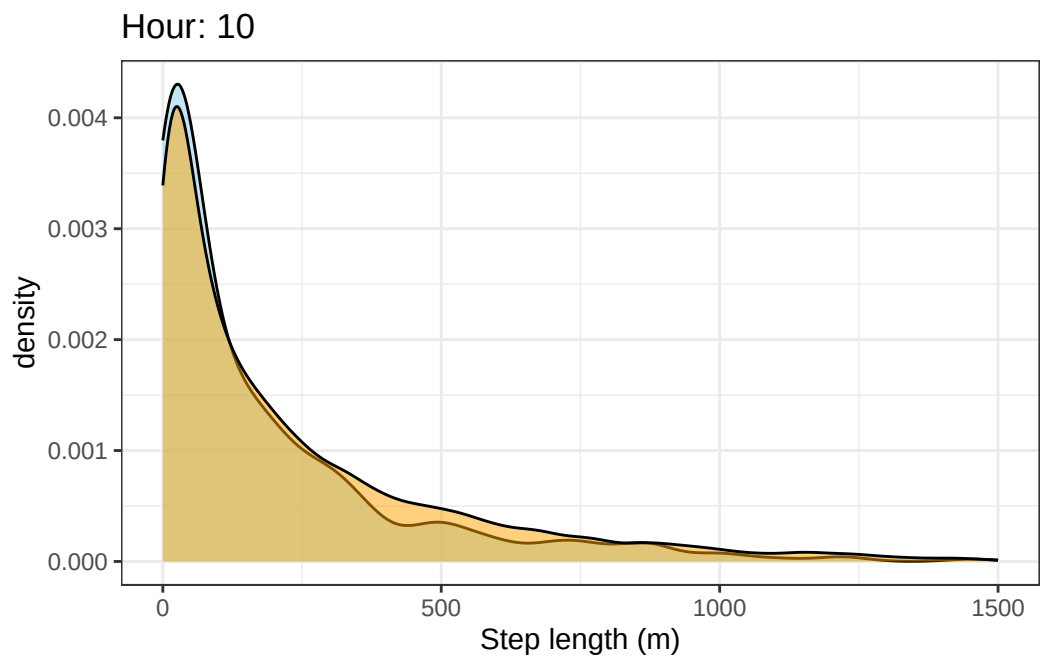


Warning: Removed 2 rows containing non-finite outside the scale range  
(`stat\_density()`).

Warning: Removed 88 rows containing non-finite outside the scale range  
(`stat\_density()`).

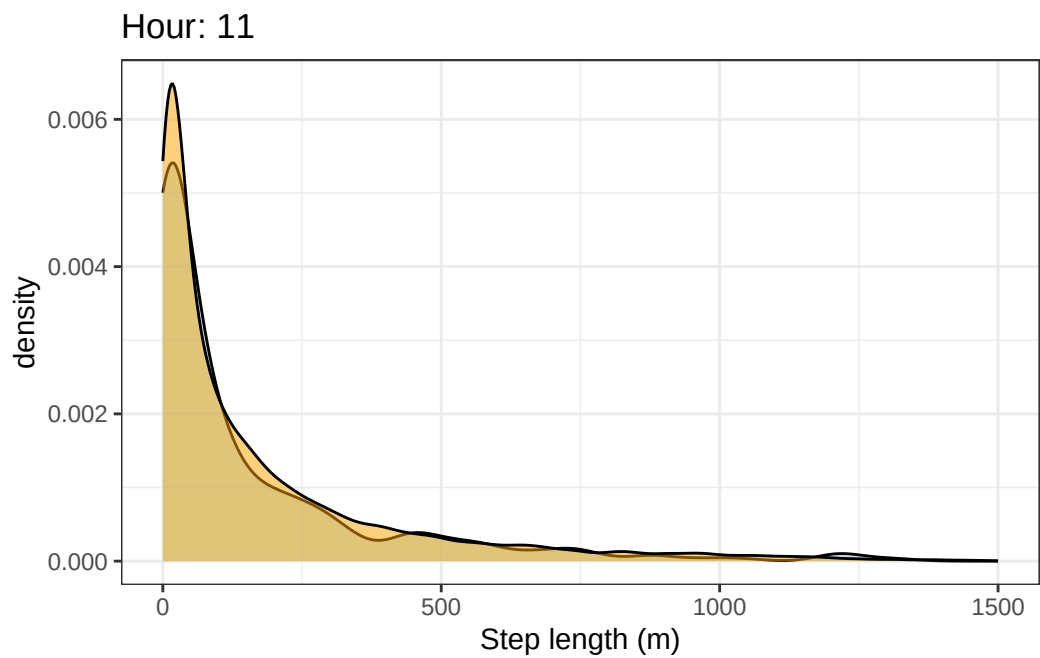


Warning: Removed 1 row containing non-finite outside the scale range  
(`stat\_density()`).

Warning: Removed 44 rows containing non-finite outside the scale range  
(`stat\_density()`).

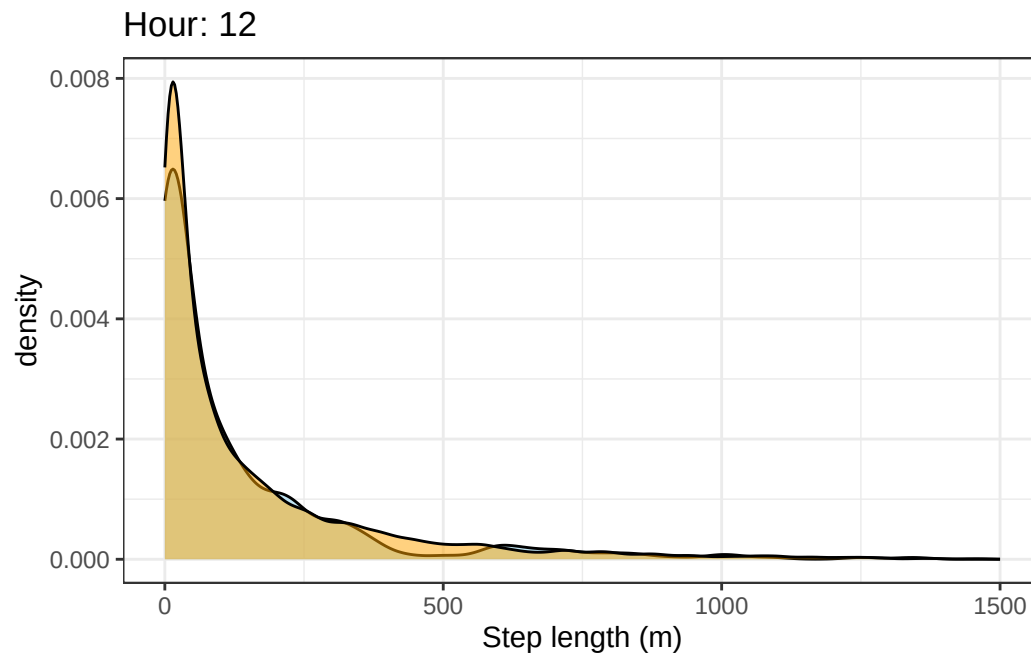


Warning: Removed 1 row containing non-finite outside the scale range  
(`stat\_density()`).

Warning: Removed 54 rows containing non-finite outside the scale range  
(`stat\_density()`).

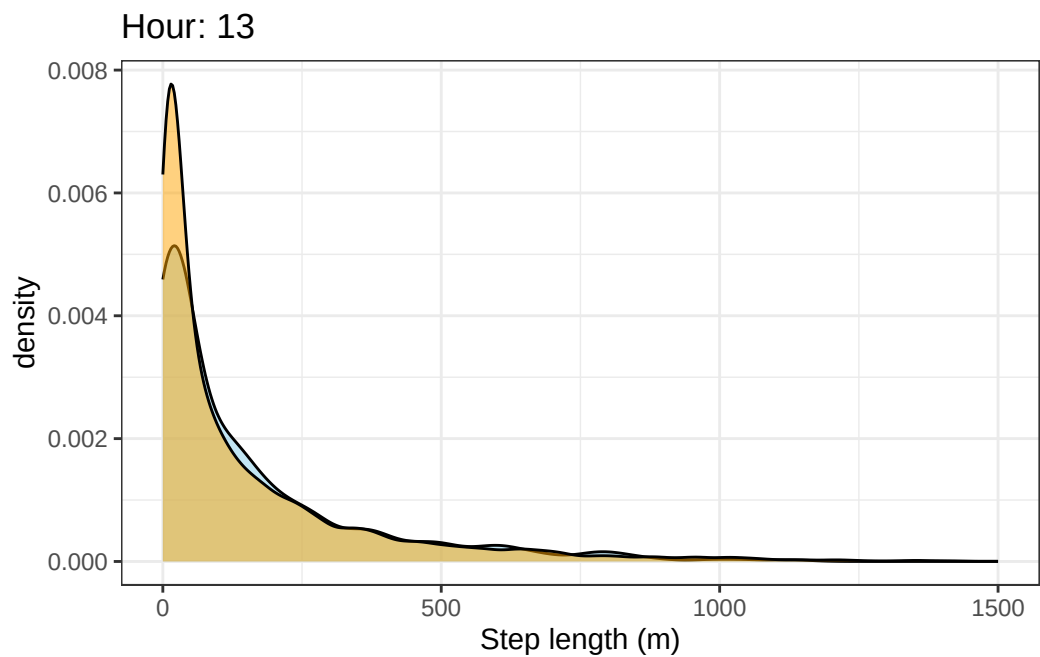

Warning: Removed 3 rows containing non-finite outside the scale range (``stat_density()``).


Warning: Removed 57 rows containing non-finite outside the scale range (``stat_density()``).

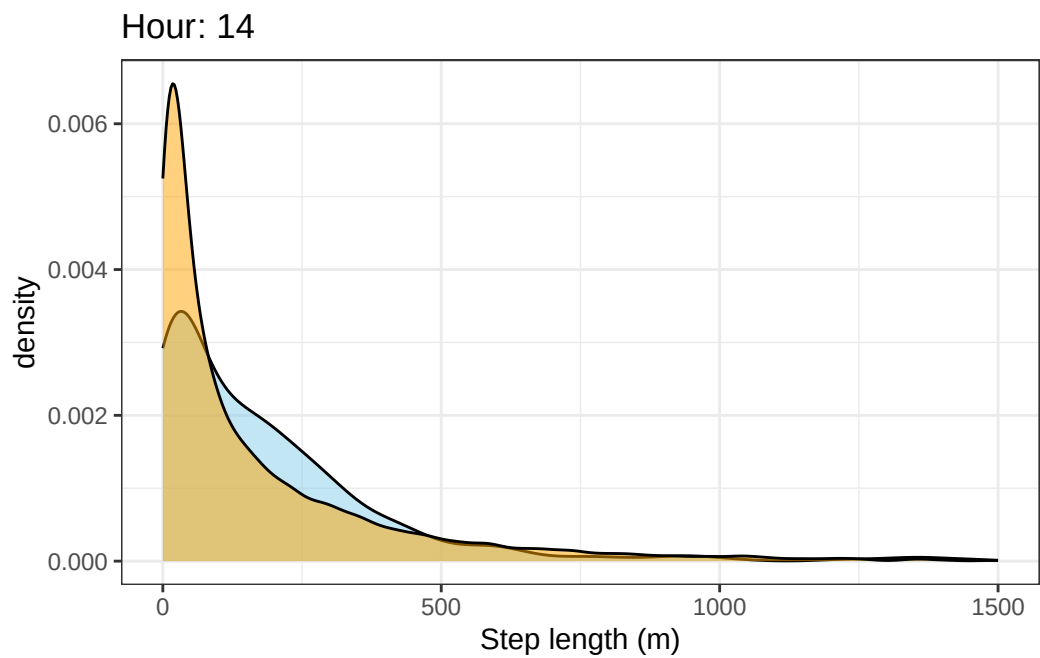




Warning: Removed 7 rows containing non-finite outside the scale range  
(`stat\_density()`).

Warning: Removed 74 rows containing non-finite outside the scale range  
(`stat\_density()`).

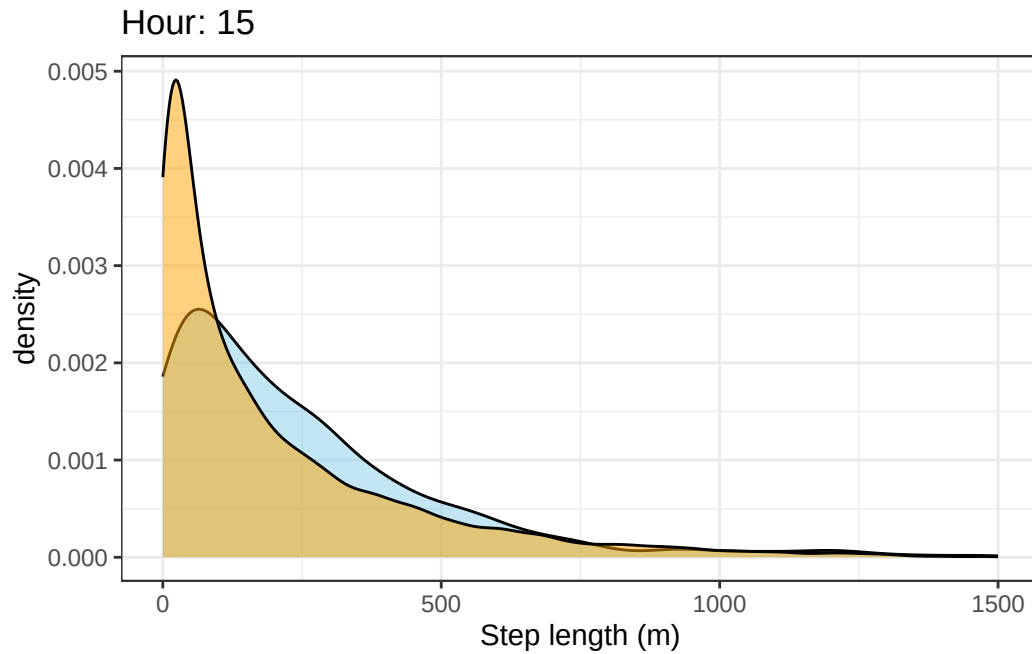


Warning: Removed 8 rows containing non-finite outside the scale range  
(`stat\_density()`).

Warning: Removed 161 rows containing non-finite outside the scale range  
(`stat\_density()`).

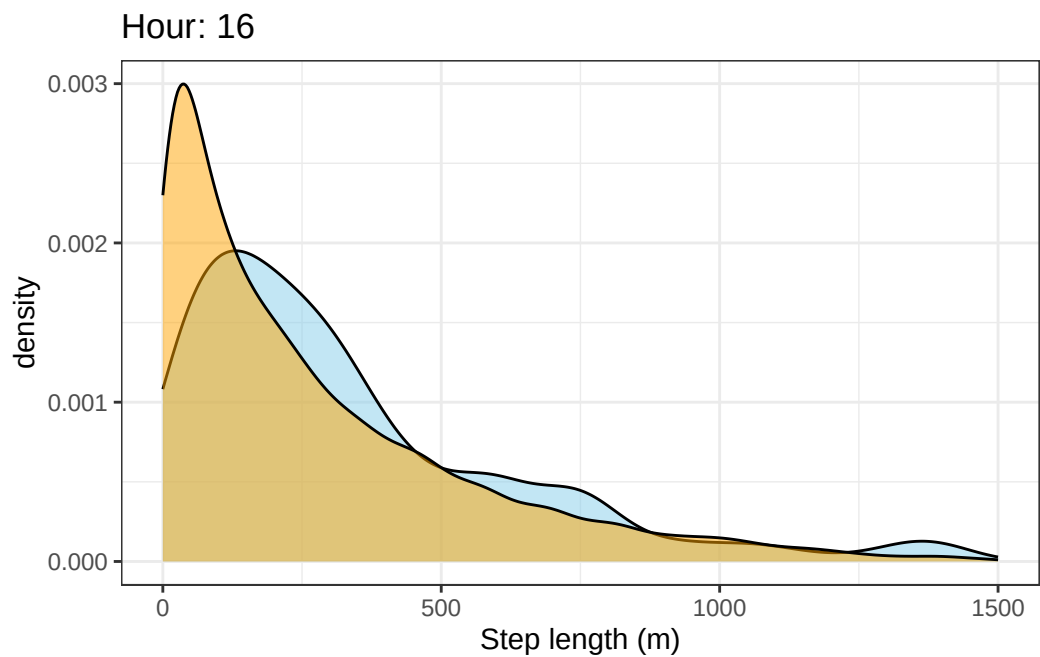


Warning: Removed 9 rows containing non-finite outside the scale range  
(`stat\_density()`).

Warning: Removed 273 rows containing non-finite outside the scale range  
(`stat\_density()`).

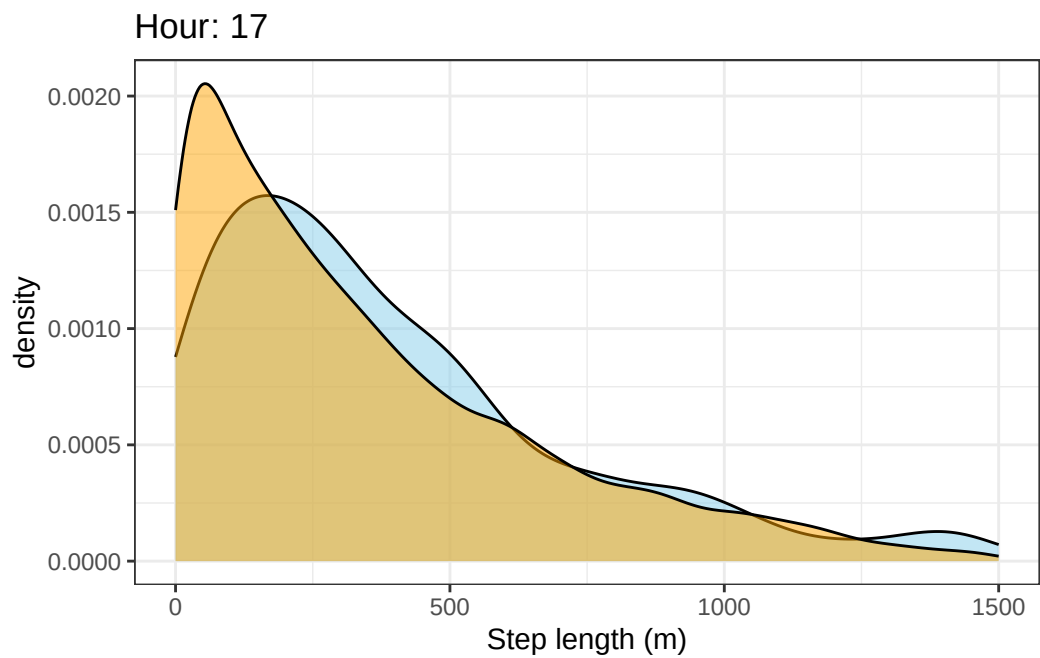


Warning: Removed 12 rows containing non-finite outside the scale range  
(`stat\_density()`).

Warning: Removed 398 rows containing non-finite outside the scale range  
(`stat\_density()`).

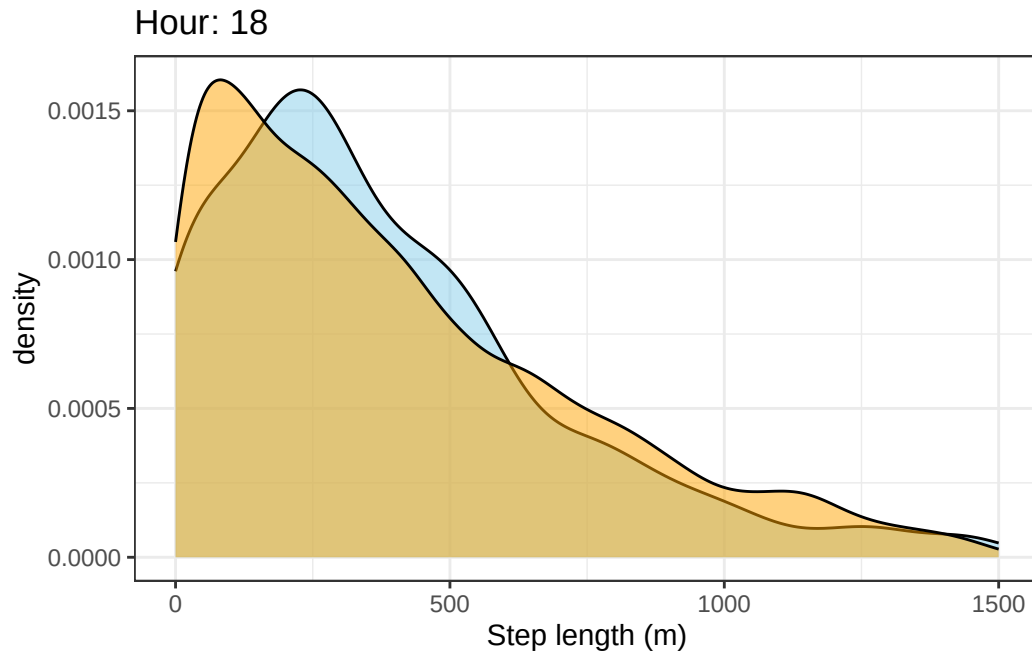


Warning: Removed 9 rows containing non-finite outside the scale range  
(`stat\_density()`).

Warning: Removed 457 rows containing non-finite outside the scale range  
(`stat\_density()`).

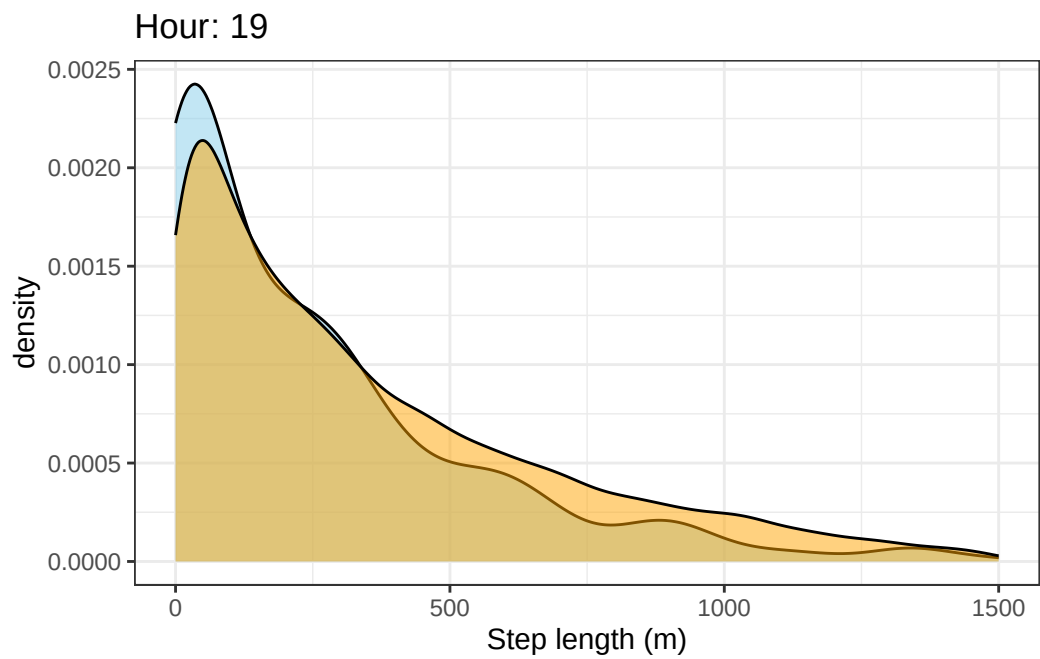


Warning: Removed 5 rows containing non-finite outside the scale range (``stat_density()``).

Warning: Removed 228 rows containing non-finite outside the scale range (``stat_density()``).

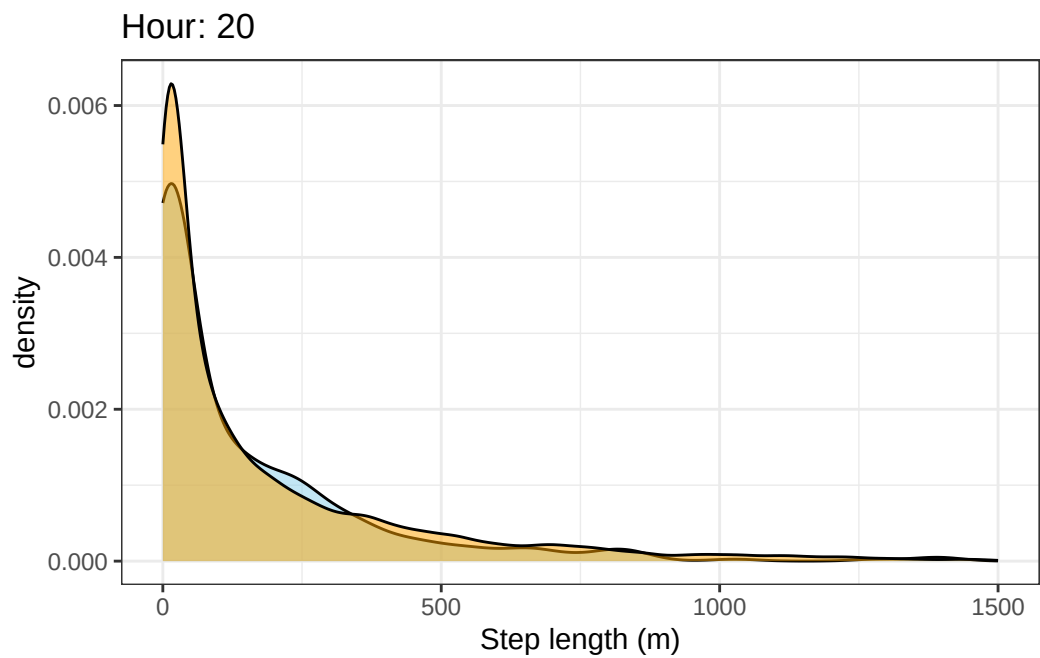


Warning: Removed 3 rows containing non-finite outside the scale range  
(`stat\_density()`).

Warning: Removed 103 rows containing non-finite outside the scale range  
(`stat\_density()`).

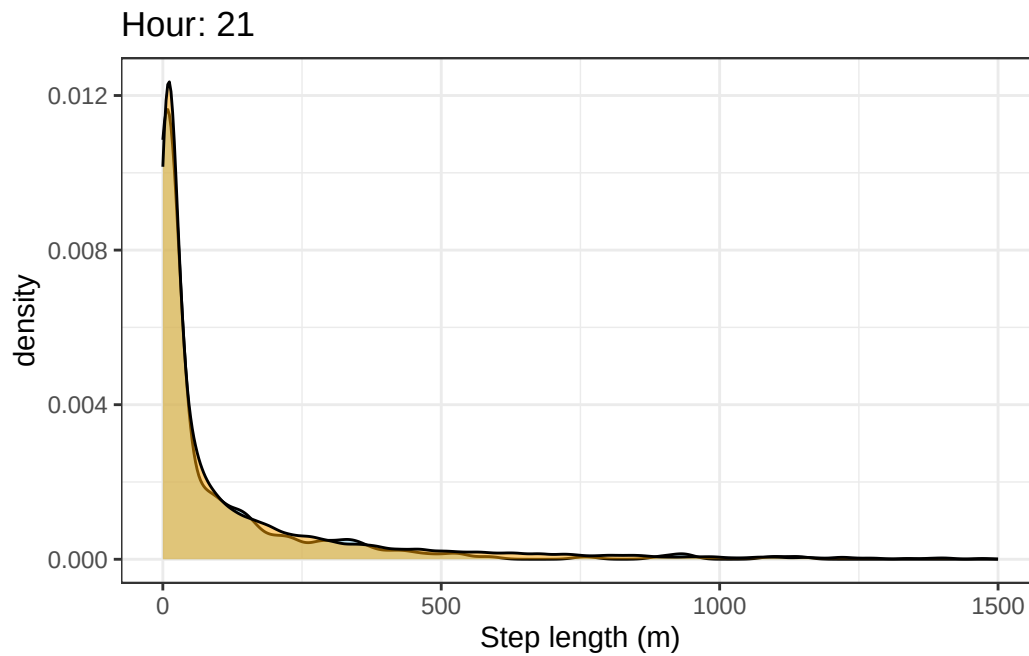


Warning: Removed 2 rows containing non-finite outside the scale range  
(`stat\_density()`).

Warning: Removed 60 rows containing non-finite outside the scale range  
(`stat\_density()`).

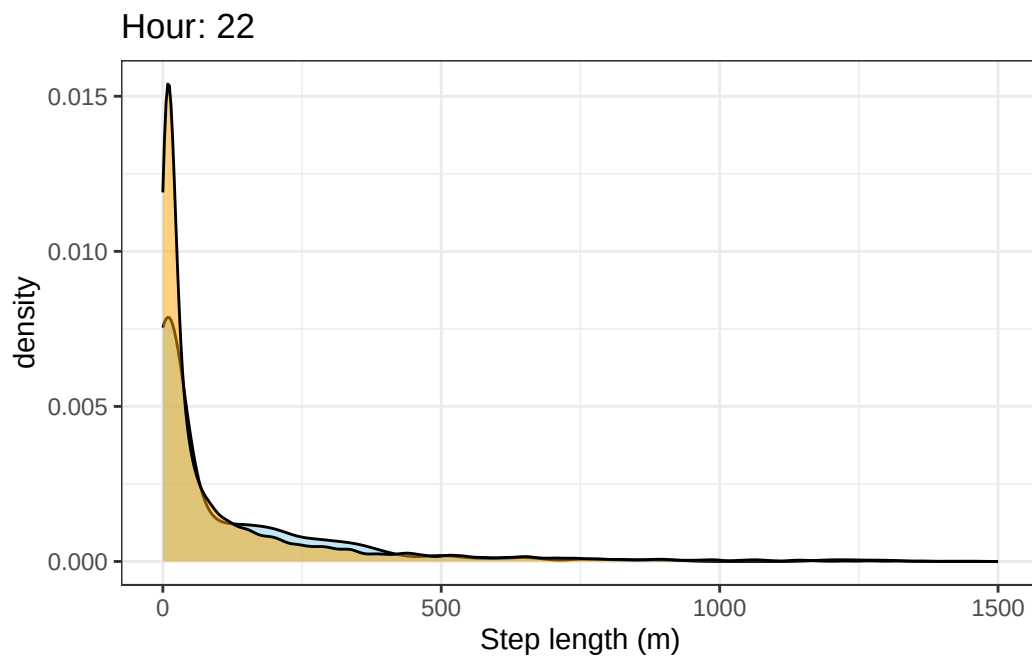

Warning: Removed 3 rows containing non-finite outside the scale range  
(`stat\_density()`).


Warning: Removed 101 rows containing non-finite outside the scale range  
(`stat\_density()`).

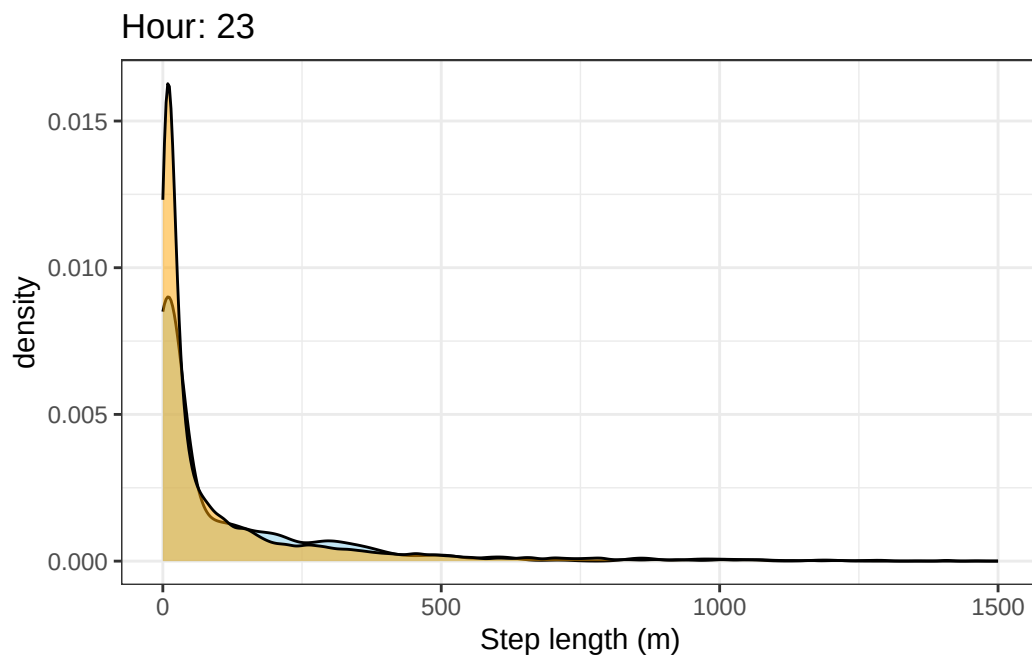


## Density of turning angles for each hour

```
for(i in 0:23) {  
  print(ggplot() +  
    geom_density(data = all_data %>% filter(id == 2005 & hour_t1 == i),  
      aes(x = ta),  
      fill = "skyblue", colour = "black", alpha = 0.5) +  
    geom_density(data = all_data %>% filter(!id == 2005 & hour_t1 == i),  
      aes(x = ta),  
      fill = "orange", colour = "black", alpha = 0.5) +  
    scale_x_continuous("Turning angle (radians)", limits = c(-pi, pi)) +  
    ggtitle(paste0("Hour: ", i)) +  
    theme_bw()  
  }  
}
```


Warning: Removed 50 rows containing non-finite outside the scale range  
(`stat\_density()`).

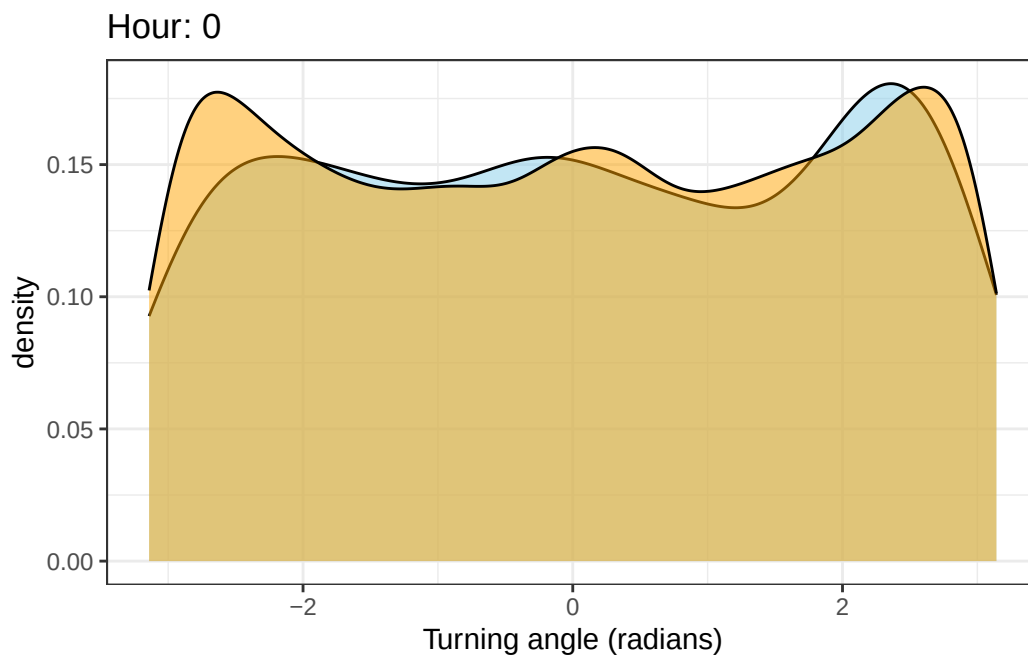



Hour: 1

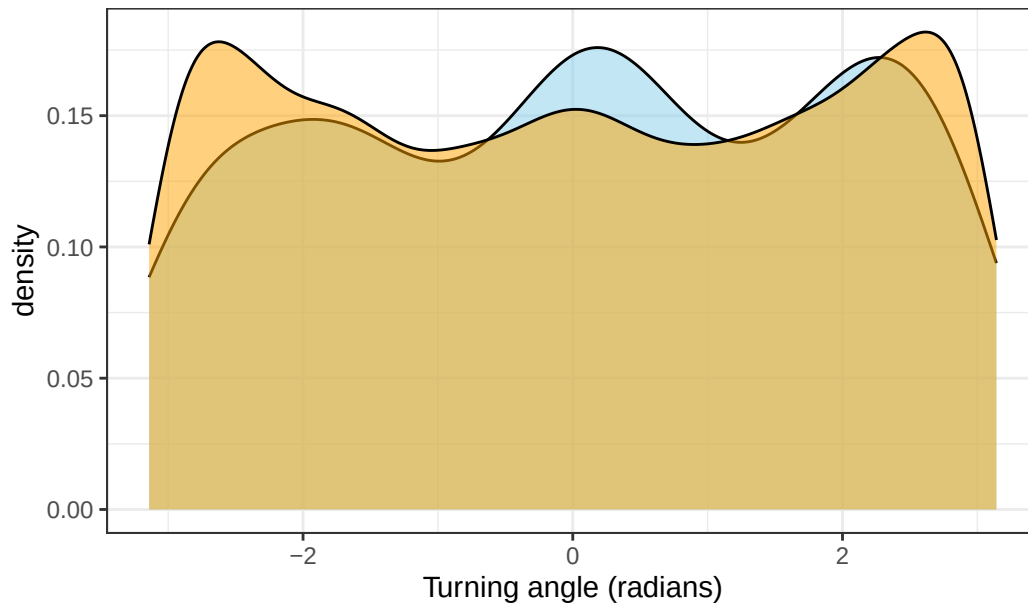


Hour: 2

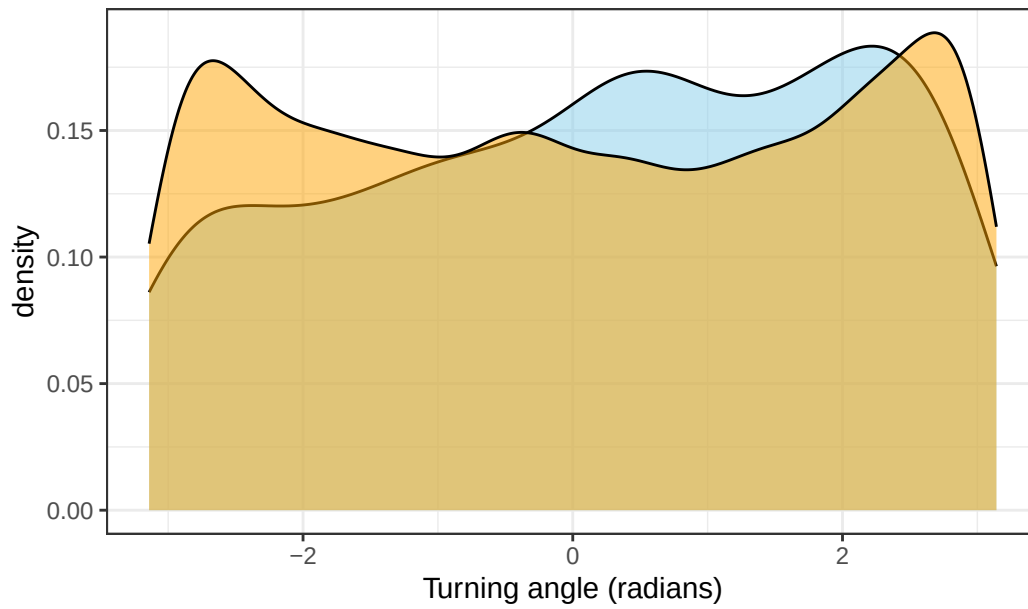




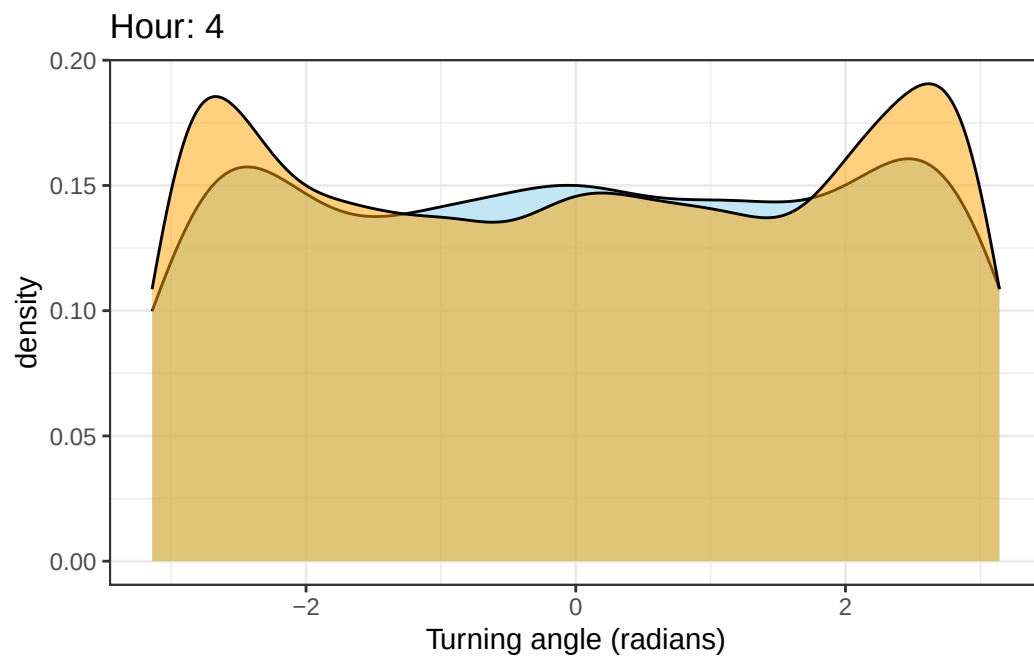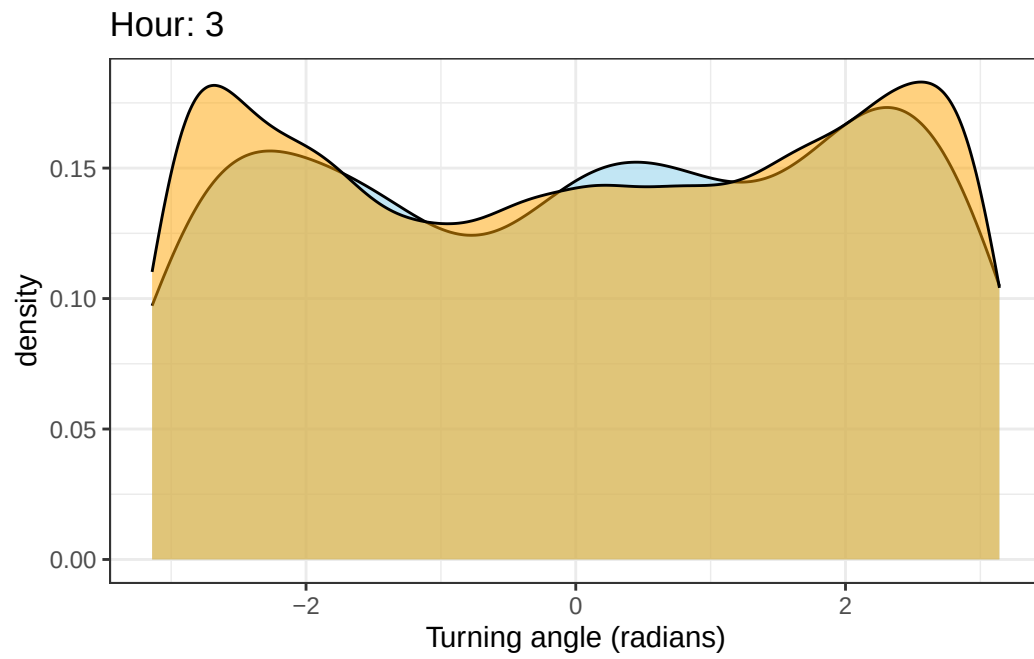


Hour: 5

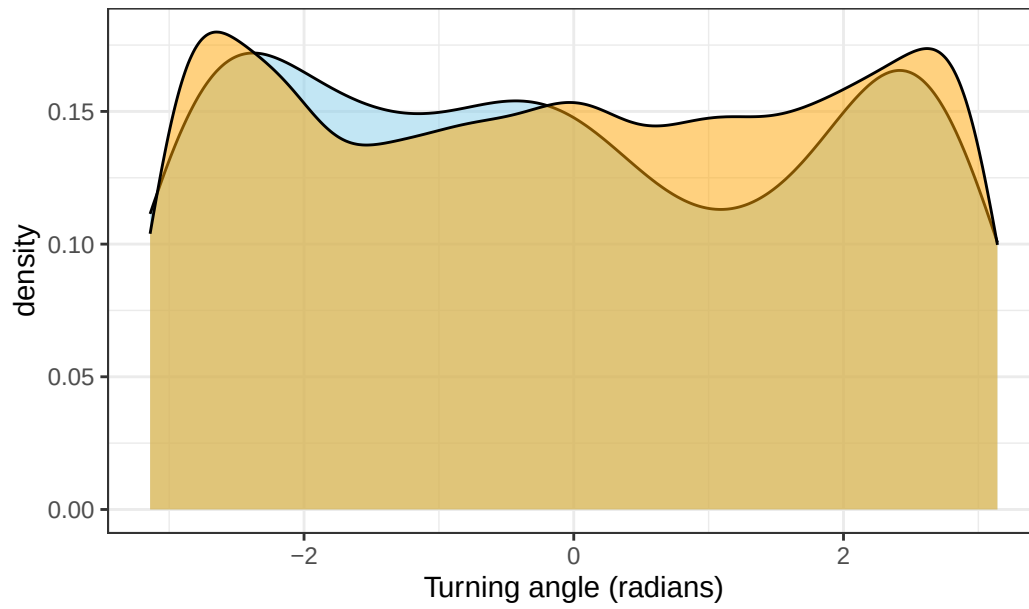


Hour: 6

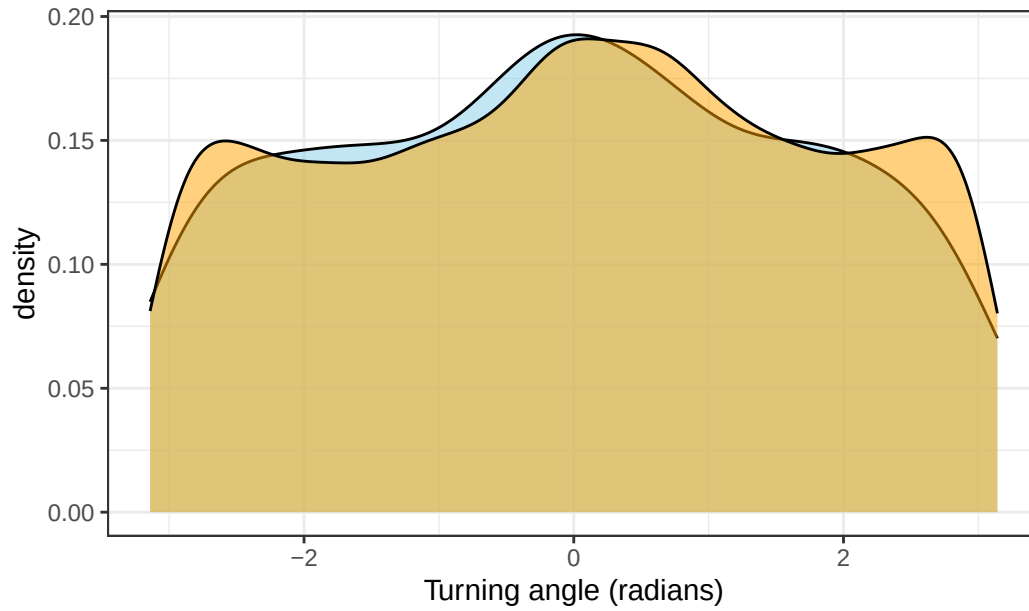


Hour: 7

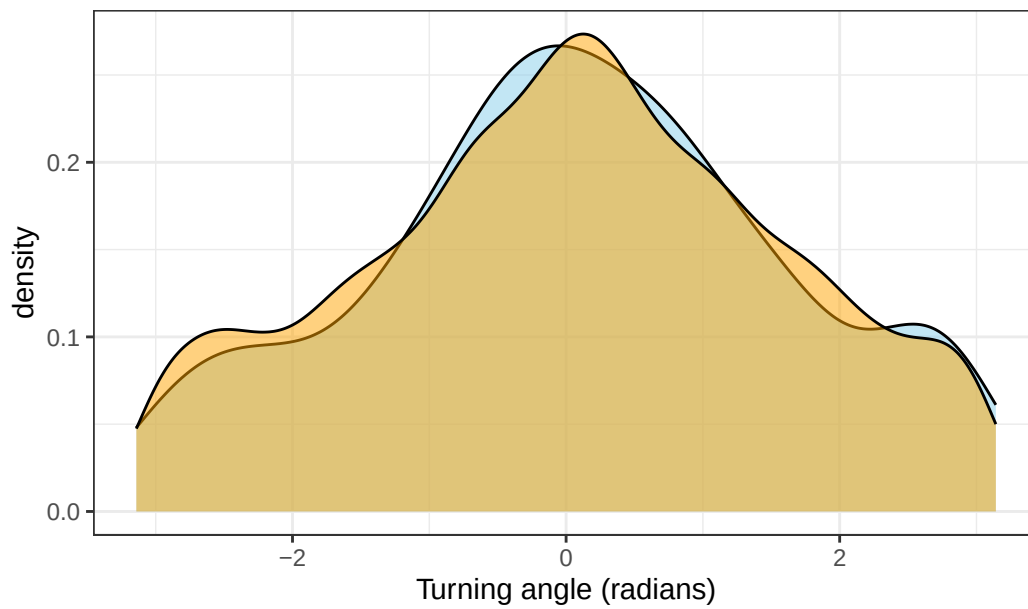

Hour: 8

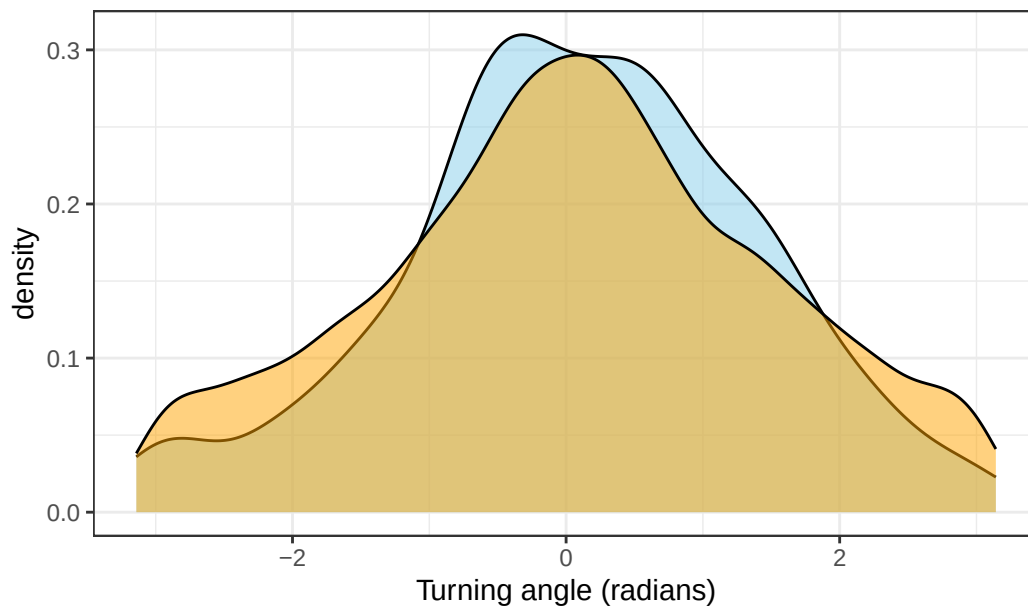


Hour: 9

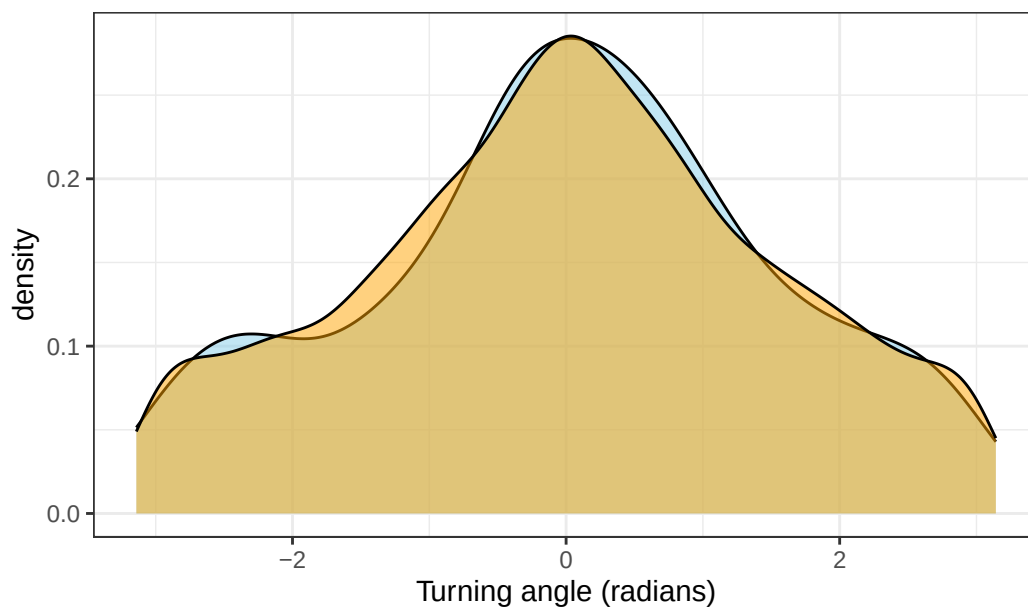


Warning: Removed 1 row containing non-finite outside the scale range (``stat_density()``).

Warning: Removed 1 row containing non-finite outside the scale range (``stat_density()``).


Hour: 10

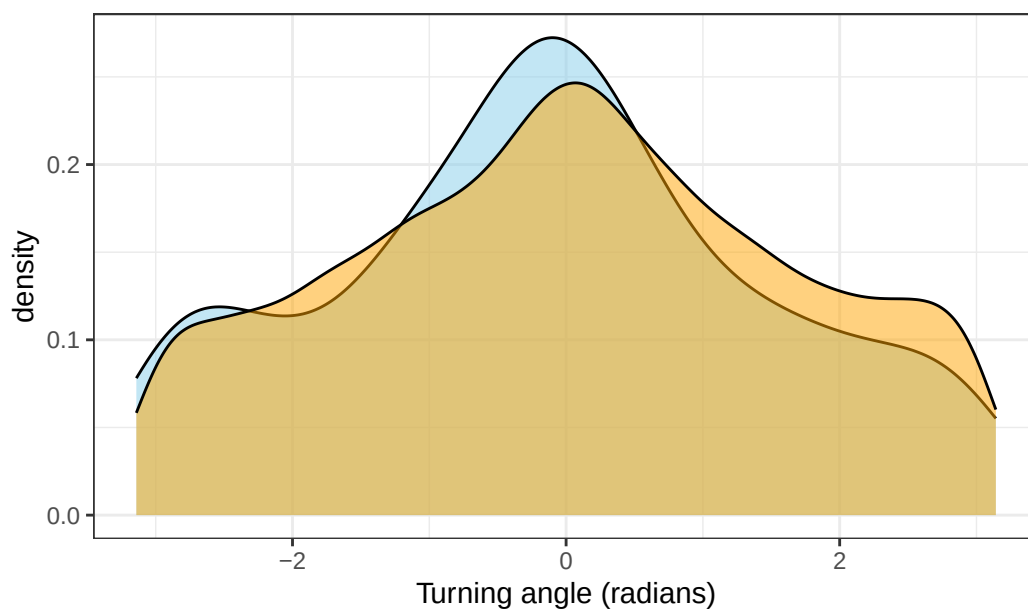


Hour: 11

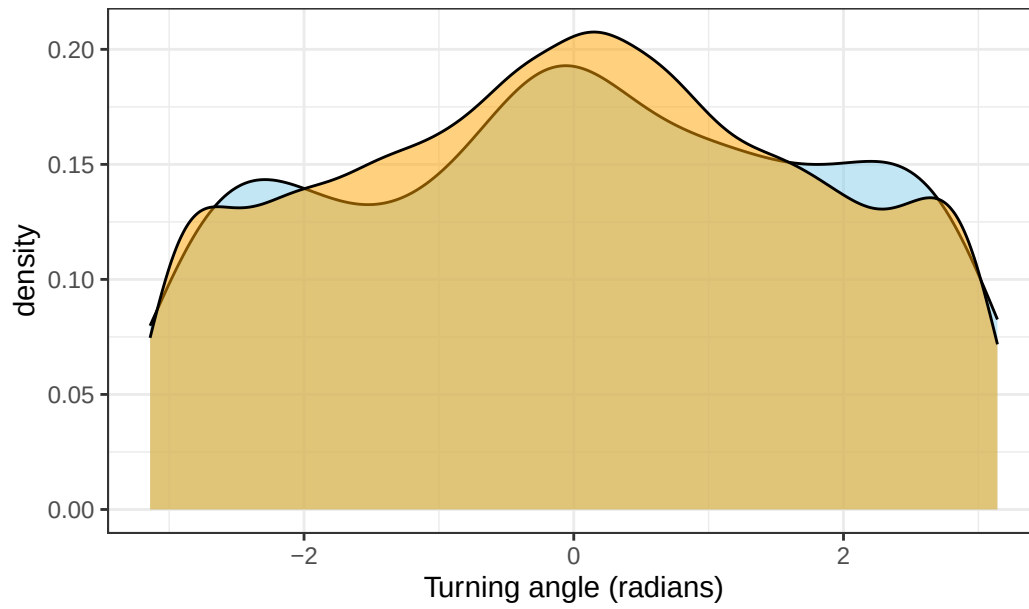


Hour: 12

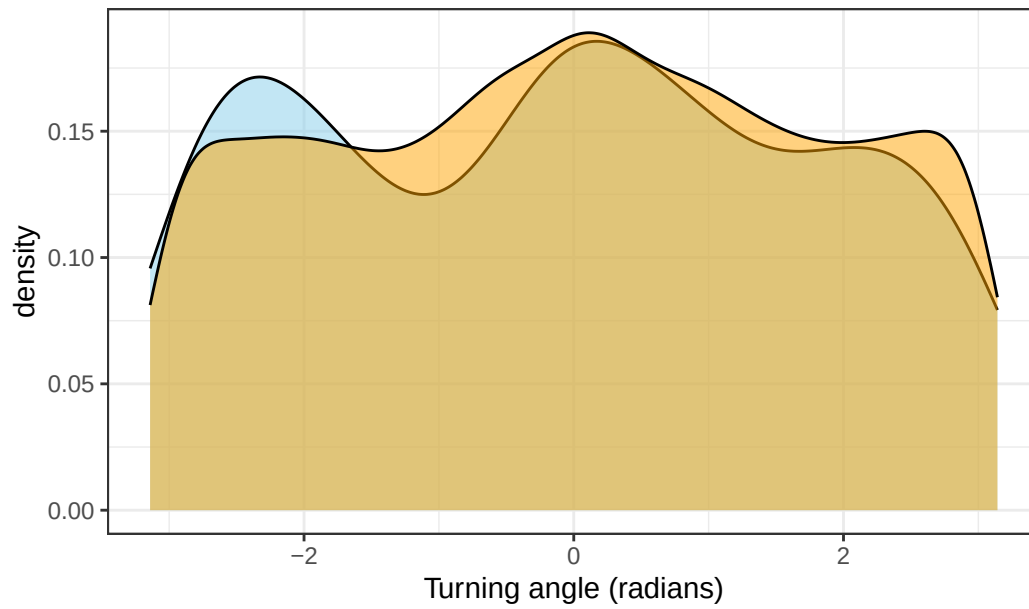


Hour: 13

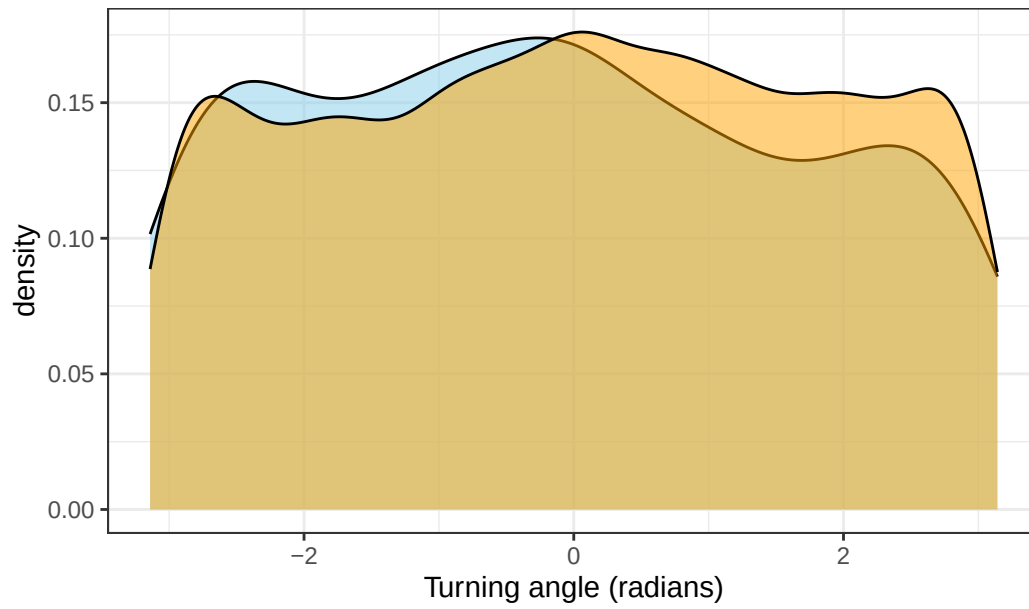


Hour: 14

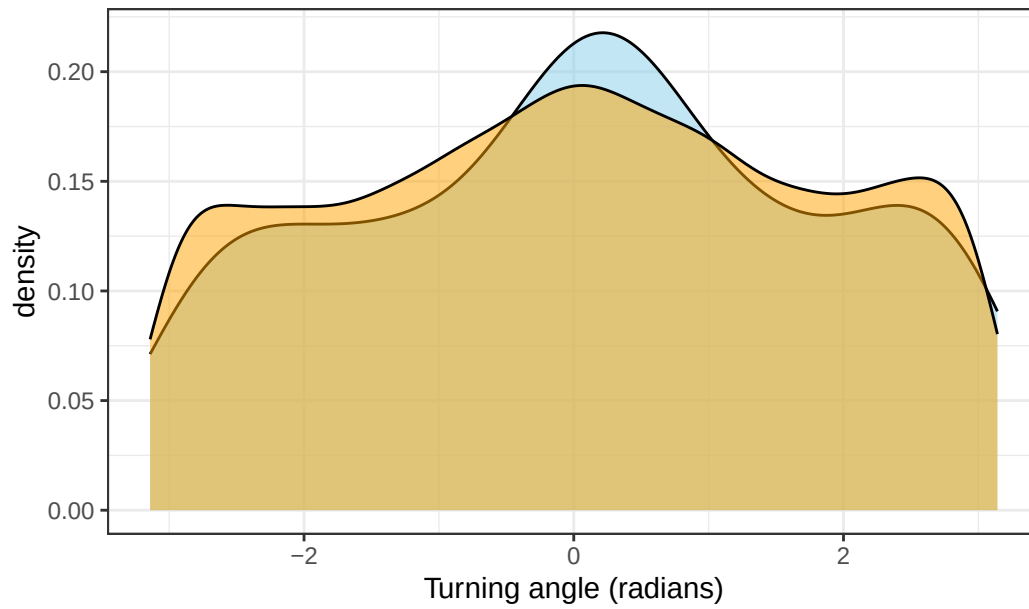


Hour: 15

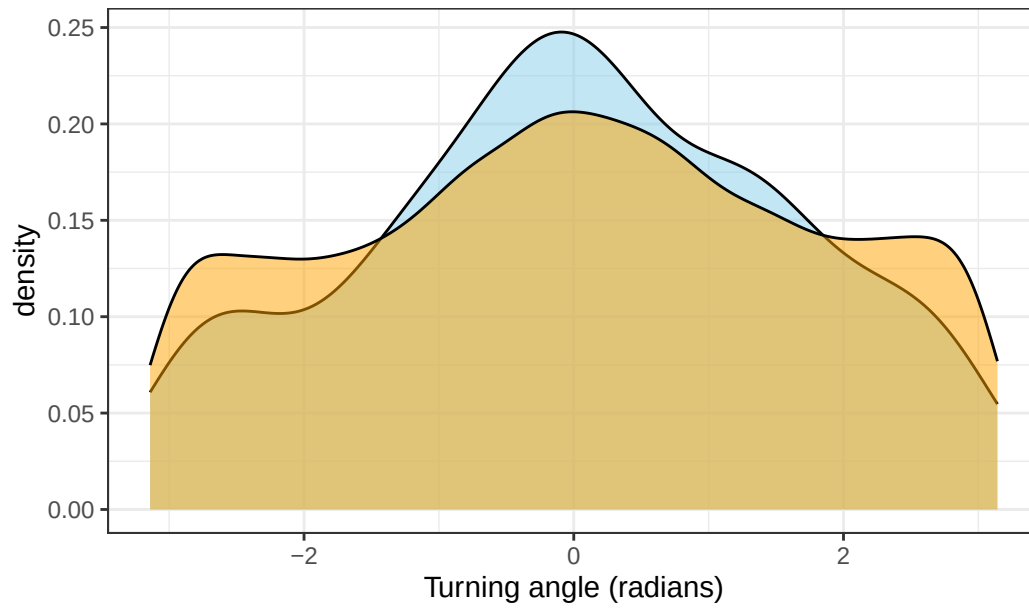


Hour: 16

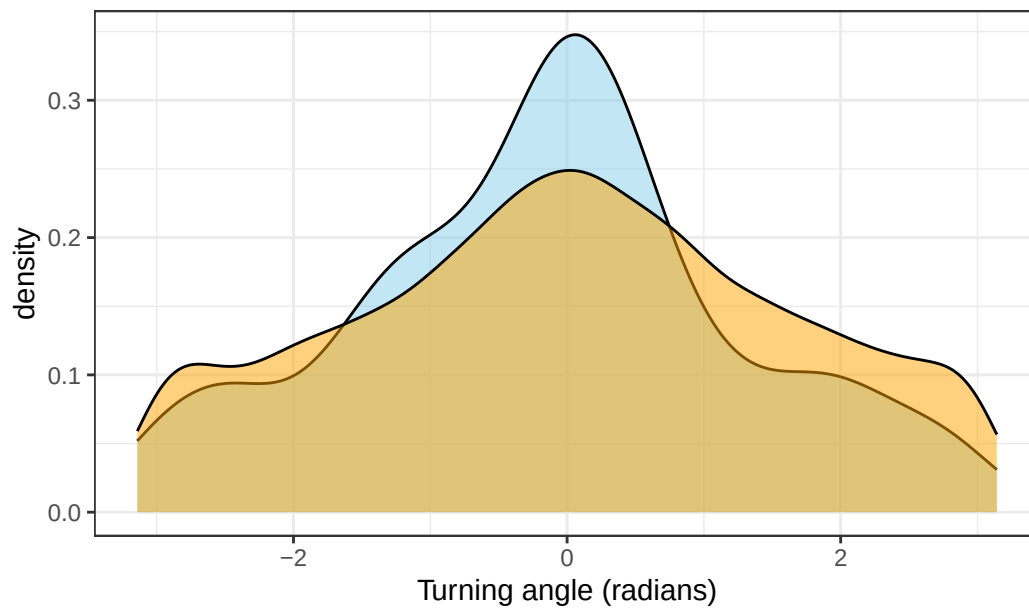

Hour: 17

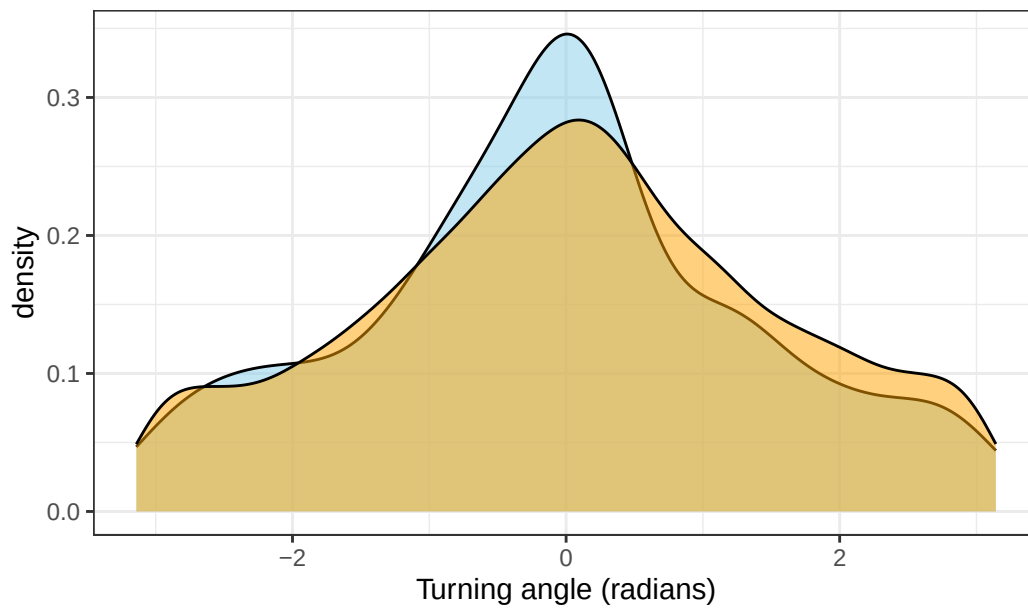


Hour: 18

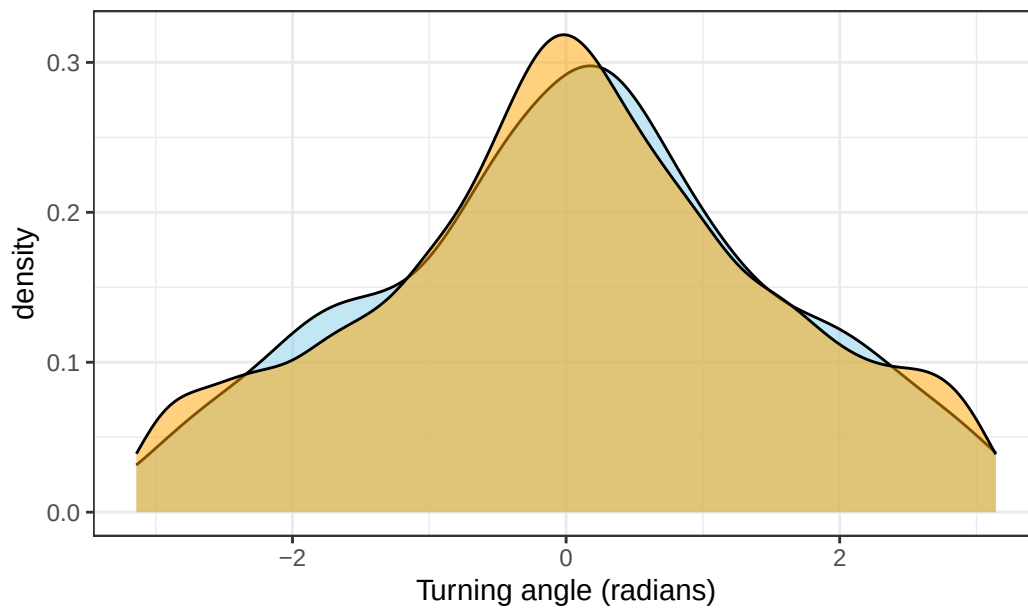






Hour: 19

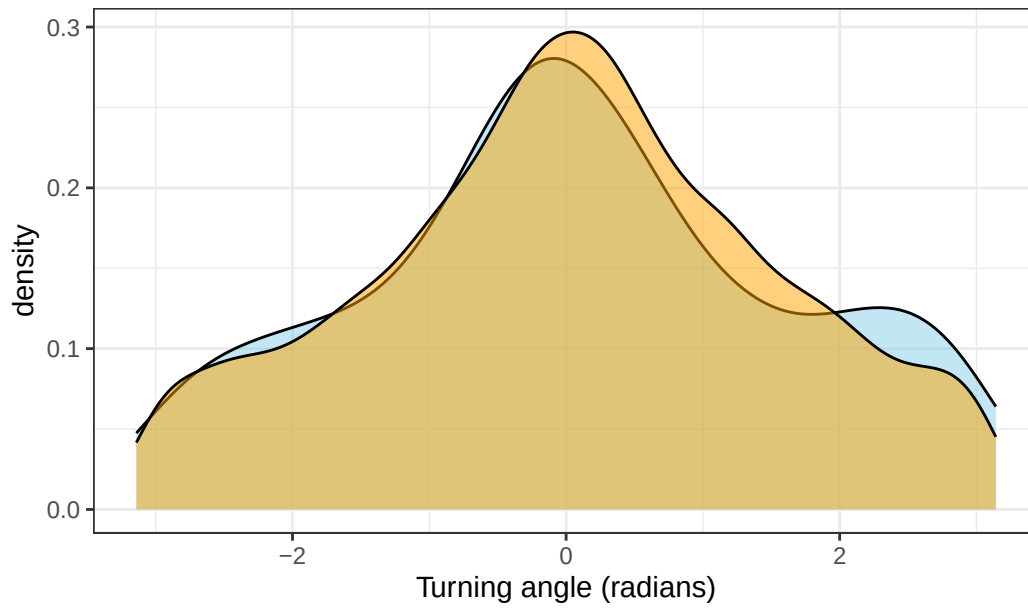


Hour: 20

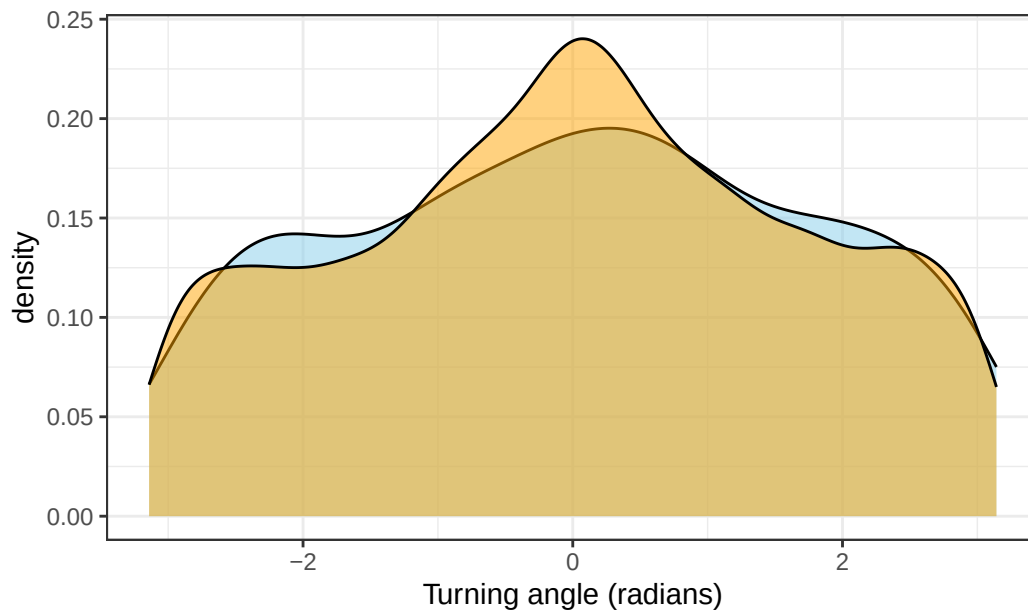

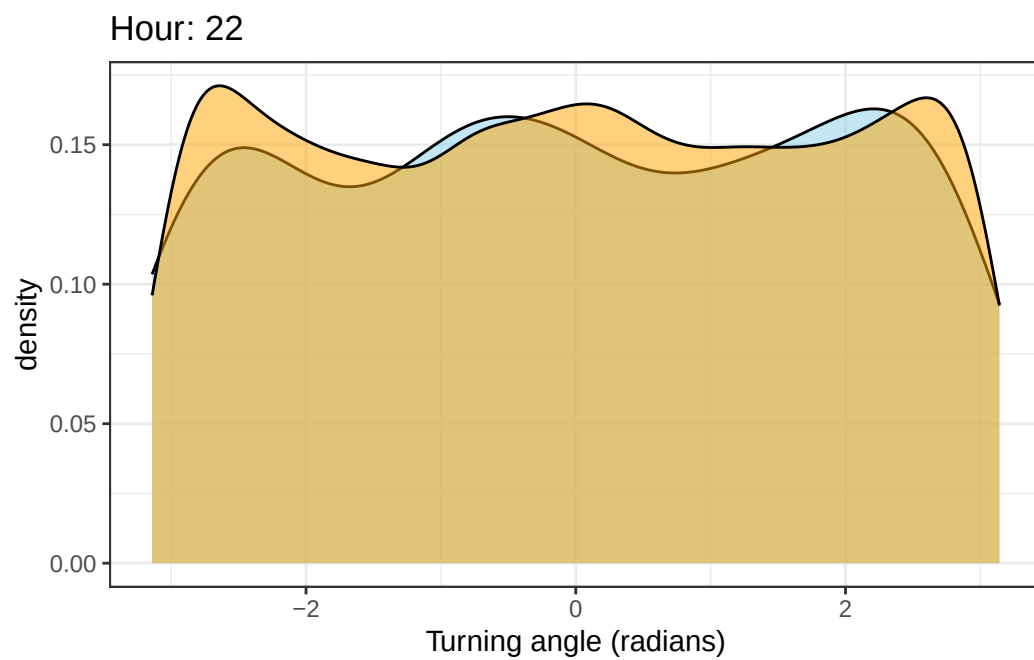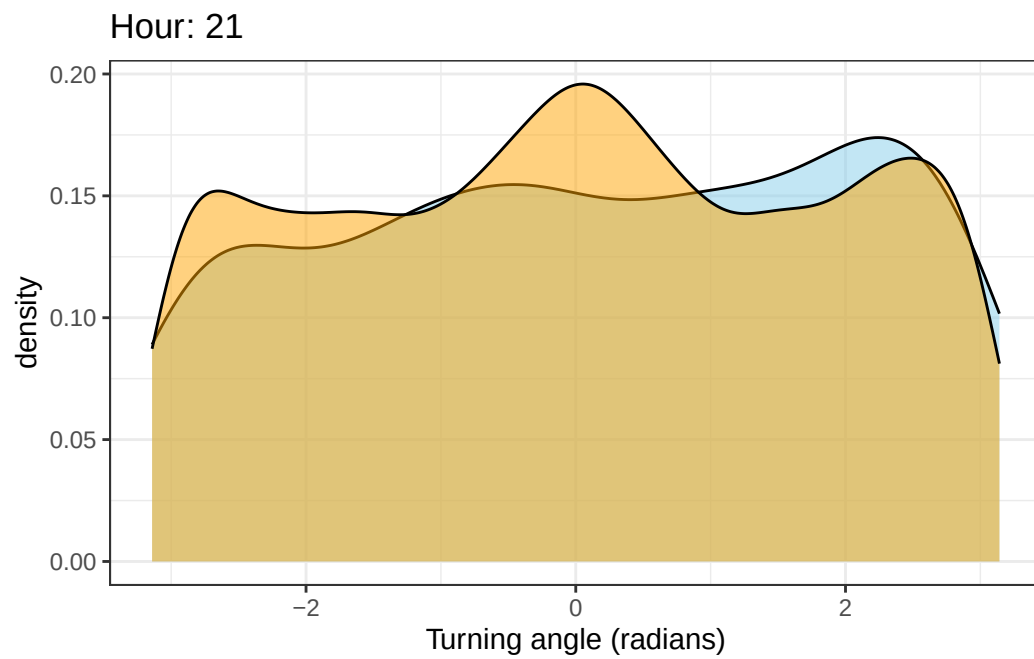

Warning: Removed 50 rows containing non-finite outside the scale range (`stat\_density()`).

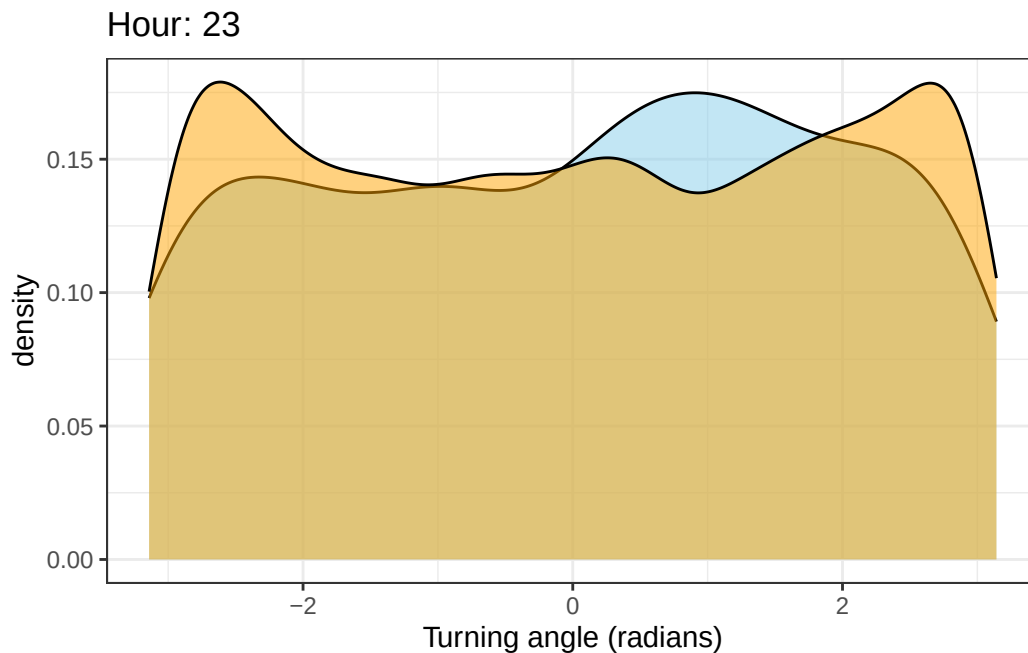

## Extract covariate values

To check the distribution of environmental values, we can extract the values of the covariates at the locations of the observed and simulated data.

We also need to index the correct NDVI raster for each row of the data.

```
# for the simulated data
all_data_xy <- data.frame("x" = all_data$x1, "y" = all_data$y1)

# Calculate ndvi_index for all rows at once using vectorized operation
all_data <- all_data %>%
  mutate(
    ndvi_index = vapply(t1, function(t) which.min(abs(difftime(t, terra::time(ndvi)))), inte
  )

# Split row indices by the corresponding NDVI layer index
ndvi_groups <- split(seq_len(nrow(all_data_xy)), all_data$ndvi_index)

# Extract values per group in one call per layer
extracted_ndvi <- map2(ndvi_groups, names(ndvi_groups), function(rows, index_str) {
  # Convert the layer index from character to numeric if needed
  index <- as.numeric(index_str)
  terra::extract(ndvi[[index]], all_data_xy[rows, , drop = FALSE])[,2]
})
```

```
# Reassemble the extracted ndvi values into a single vector in original order
ndvi_values <- unsplit(extracted_ndvi, all_data$ndvi_index)

# Extract raster data based on calculated ndvi_index
all_data <- all_data %>%
  mutate(
    ndvi = ndvi_values,
    canopy_cover = terra::extract(canopy_cover, all_data_xy)[,2],
    veg_herby = terra::extract(veg_herby, all_data_xy)[,2],
    slope = terra::extract(slope, all_data_xy)[,2],
  )
```

## Hourly movement behaviour and selection of covariates

Here we bin the trajectories into the hours of the day, and calculate the mean, median (where appropriate) and sd values for the step lengths and four habitat covariates.

We also save the results as a csv to compare between all of the models.

```
# there are some NA values in the hour_t1 column as well as the covariates
sum(is.na(all_data$hour_t1))
```

```
[1] 0
```

```
# drop NAs
all_data <- all_data %>% dplyr::select(-date, -time_diff) %>% drop_na()

hourly_habitat <-
  all_data %>%
  dplyr::group_by(hour_t1, id) %>%
  summarise(n = n(),
    step_length_mean = mean(sl, na.rm = TRUE),
    step_length_median = median(sl, na.rm = TRUE),
    step_length_sd = sd(sl, na.rm = TRUE),
    ndvi_mean = mean(ndvi, na.rm = TRUE),
    ndvi_median = median(ndvi, na.rm = TRUE),
    ndvi_sd = sd(ndvi, na.rm = TRUE),
    ndvi_min = min(ndvi, na.rm = TRUE),
    ndvi_max = max(ndvi, na.rm = TRUE),
    ndvi_mean = mean(ndvi, na.rm = TRUE),
    ndvi_median = median(ndvi, na.rm = TRUE),
    ndvi_sd = sd(ndvi, na.rm = TRUE),
```

```

    herby_mean = mean(veg_herby, na.rm = TRUE),
    herby_sd = sd(veg_herby, na.rm = TRUE),
    canopy_mean = mean(canopy_cover/100, na.rm = TRUE),
    canopy_sd = sd(canopy_cover/100, na.rm = TRUE),
    canopy_min = min(canopy_cover/100, na.rm = TRUE),
    canopy_max = max(canopy_cover/100, na.rm = TRUE),
    slope_mean = mean(slope, na.rm = TRUE),
    slope_median = median(slope, na.rm = TRUE),
    slope_sd = sd(slope, na.rm = TRUE),
    slope_min = min(slope, na.rm = TRUE),
    slope_max = max(slope, na.rm = TRUE)
  ) %>% ungroup() %>%
mutate(Data = ifelse(id == 2005, "Observed", "deepSSF"))

```

`summarise()` has grouped output by 'hour\_t1'. You can override using the `.groups` argument.

Plotting the hourly habitat selection

```

hourly_habitat_long <- hourly_habitat %>%
  pivot_longer(cols = !c(Data, hour_t1, id), names_to = "variable", values_to = "value")

```

To show the stochasticity of the simulations, here we show the 25th to 50th quantiles and the 2.5th to 97.5th quantiles of the data. Remember that the 'data' are the means for each hour for each trajectory, so the quantiles are calculated across the means for each hour. We use a dashed-line ribbon for the 95% interval and a solid-line ribbon for the 50% interval. We show the mean as a solid line.

This is the plotting approach that we used in the paper.

## Calculate the quantiles

```

# for all observed and simulated data
hourly_summary_quantiles <- hourly_habitat_long %>%
  dplyr::group_by(Data, hour_t1, variable) %>%
  summarise(n = n(),
    mean = mean(value, na.rm = TRUE),
    sd = sd(value, na.rm = TRUE),
    q025 = quantile(value, probs = 0.025, na.rm = TRUE),
    q25 = quantile(value, probs = 0.25, na.rm = TRUE),
    q50 = quantile(value, probs = 0.5, na.rm = TRUE),
    q75 = quantile(value, probs = 0.75, na.rm = TRUE),
    q975 = quantile(value, probs = 0.975, na.rm = TRUE))

```

`summarise()` has grouped output by 'Data', 'hour\_t1'. You can override using the `.groups` argument.

### Summarise the background environmental covariates

```
ndvi_df <- ndvi_df %>% select(x,y,ndvi)

data_extent <- ext(plot_extent[[1]], plot_extent[[3]], plot_extent[[2]], plot_extent[[4]])

covariates_data_subset <- c(ndvi[[8]],
                           canopy_cover/100,
                           veg_herby,
                           slope) %>% terra::crop(data_extent)

covariates_data_subset_df <- as.data.frame(covariates_data_subset, xy = TRUE)

covariate_quantiles <- covariates_data_subset_df %>%
  summarise(
    ndvi_q025 = quantile(ndvi, probs = 0.025, na.rm = TRUE),
    ndvi_q25 = quantile(ndvi, probs = 0.25, na.rm = TRUE),
    ndvi_q50 = quantile(ndvi, probs = 0.5, na.rm = TRUE),
    ndvi_mean = mean(ndvi, na.rm = TRUE),
    ndvi_q75 = quantile(ndvi, probs = 0.75, na.rm = TRUE),
    ndvi_q975 = quantile(ndvi, probs = 0.975, na.rm = TRUE),
    canopy_q025 = quantile(canopy_cover, probs = 0.025, na.rm = TRUE),
    canopy_q25 = quantile(canopy_cover, probs = 0.25, na.rm = TRUE),
    canopy_q50 = quantile(canopy_cover, probs = 0.5, na.rm = TRUE),
    canopy_mean = mean(canopy_cover, na.rm = TRUE),
    canopy_q75 = quantile(canopy_cover, probs = 0.75, na.rm = TRUE),
    canopy_q975 = quantile(canopy_cover, probs = 0.975, na.rm = TRUE),
    veg_herby_q025 = quantile(veg_herby, probs = 0.025, na.rm = TRUE),
    veg_herby_q25 = quantile(veg_herby, probs = 0.25, na.rm = TRUE),
    veg_herby_q50 = quantile(veg_herby, probs = 0.5, na.rm = TRUE),
    veg_herby_mean = mean(veg_herby, na.rm = TRUE),
    veg_herby_q75 = quantile(veg_herby, probs = 0.75, na.rm = TRUE),
    veg_herby_q975 = quantile(veg_herby, probs = 0.975, na.rm = TRUE),
    slope_q025 = quantile(slope, probs = 0.025, na.rm = TRUE),
    slope_q25 = quantile(slope, probs = 0.25, na.rm = TRUE),
    slope_q50 = quantile(slope, probs = 0.5, na.rm = TRUE),
    slope_mean = mean(slope, na.rm = TRUE),
    slope_q75 = quantile(slope, probs = 0.75, na.rm = TRUE),
    slope_q975 = quantile(slope, probs = 0.975, na.rm = TRUE)
  )
```

```
covariate_summaries_hourly <- data.frame("hour_t1" = 23.5:24.5, covariate_quantiles[rep(1, 2
```

## Set up the plotting parameters

```
# set plotting parameters here that will change in each plot
buff_path_alpha <- 0.1
ribbon_95_alpha <- 0.5
ribbon_50_alpha <- 0.25
path_95_alpha <- 1

# set path alpha
buff_path_alpha <- 0.25

# linewidth
buff_path_linewidth <- 0.5

# Create color mapping
unique_groups <- unique(hourly_habitat_long$Data)
colors <- viridis(length(unique_groups))
names(colors) <- unique_groups
colors["Observed"] <- "skyblue"
colors["deepSSF"] <- "orange"
```

## Hourly covariate selection

Note the tabs for the step lengths and each of the covariates

### Mean step lengths

```
hourly_path_sl_plot <- ggplot() +

  geom_ribbon(data = hourly_summary_quantiles %>%
    filter(Data == "Buffalo" & variable == "step_length_mean"),
    aes(x = hour_t1, ymin = q25, ymax = q75, fill = Data),
    alpha = ribbon_50_alpha) +

  geom_ribbon(data = hourly_summary_quantiles %>%
    filter(!Data == "Buffalo" & variable == "step_length_mean"),
    aes(x = hour_t1, ymin = q25, ymax = q75, fill = Data),
```

```

    alpha = ribbon_50_alpha) +

geom_path(data = hourly_habitat_long %>% filter(id < 10) %>%
  filter(!Data == "Buffalo" & variable == "step_length_mean"),
  aes(x = hour_t1, y = value, colour = Data, group = interaction(id, Data)),
  alpha = buff_path_alpha,
  linewidth = buff_path_linewidth) +

geom_path(data = hourly_habitat_long %>%
  filter(Data == "Buffalo" & variable == "step_length_mean"),
  aes(x = hour_t1, y = value, colour = Data, group = interaction(id, Data)),
  alpha = buff_path_alpha,
  linewidth = buff_path_linewidth) +

geom_path(data = hourly_summary_quantiles %>%
  filter(!Data == "Buffalo" & variable == "step_length_mean"),
  aes(x = hour_t1, y = q025, colour = Data),
  linetype = "dashed",
  alpha = path_95_alpha) +

geom_path(data = hourly_summary_quantiles %>%
  filter(!Data == "Buffalo" & variable == "step_length_mean"),
  aes(x = hour_t1, y = q975, colour = Data),
  linetype = "dashed",
  alpha = path_95_alpha) +

geom_path(data = hourly_summary_quantiles %>%
  filter(Data == "Buffalo" & variable == "step_length_mean"),
  aes(x = hour_t1, y = mean, colour = Data),
  linewidth = 1) +


geom_path(data = hourly_summary_quantiles %>%
  filter(!Data == "Buffalo" & variable == "step_length_mean"),
  aes(x = hour_t1, y = mean, colour = Data),
  linewidth = 1) +

scale_fill_manual(values = colors) +
scale_colour_manual(values = colors) +
scale_y_continuous("Mean value") +
scale_x_continuous("Hour", breaks = seq(0,24,3)) +
ggtitle("Step length (m)") +
theme_bw() +
theme(legend.position = "bottom")

```



```
hourly_path_sl_plot
```

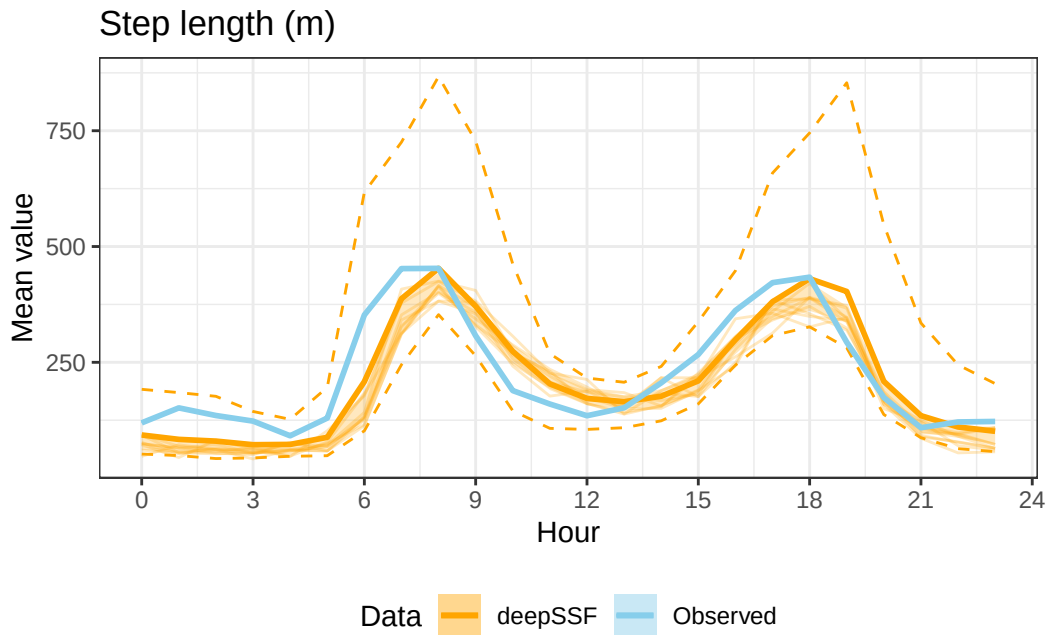

## NDVI

```
hourly_path_ndvi_plot <- ggplot() +

  geom_ribbon(data = covariate_summaries_hourly,
            aes(x = hour_t1, ymin = ndvi_q25, ymax = ndvi_q75),
            colour = "lightgrey", alpha = 0.15) +

  # geom_path(data = covariate_summaries_hourly,
  #           aes(x = hour_t1, y = ndvi_q025),
  #           colour = "black", linetype = "dashed") +
  #
  # geom_path(data = covariate_summaries_hourly,
  #           aes(x = hour_t1, y = ndvi_q975),
  #           colour = "black", linetype = "dashed") +

  geom_path(data = covariate_summaries_hourly,
            aes(x = hour_t1, y = ndvi_mean),
            colour = "black", linetype = "dashed") +

  geom_ribbon(data = hourly_summary_quantiles %>%
            filter(Data == "Buffalo" & variable == "ndvi_mean"),
```

```

aes(x = hour_t1, ymin = q25, ymax = q75, fill = Data),
alpha = ribbon_50_alpha) +

geom_ribbon(data = hourly_summary_quantiles %>%
  filter(!Data == "Buffalo" & variable == "ndvi_mean"),
aes(x = hour_t1, ymin = q25, ymax = q75, fill = Data),
alpha = ribbon_50_alpha) +

geom_path(data = hourly_habitat_long %>% filter(id < 10) %>%
  filter(!Data == "Buffalo" & variable == "ndvi_mean"),
aes(x = hour_t1, y = value, colour = Data, group = interaction(id, Data)),
alpha = buff_path_alpha,
linewidth = buff_path_linewidth) +

geom_path(data = hourly_habitat_long %>%
  filter(Data == "Buffalo" & variable == "ndvi_mean"),
aes(x = hour_t1, y = value, colour = Data, group = interaction(id, Data)),
alpha = buff_path_alpha,
linewidth = buff_path_linewidth) +

geom_path(data = hourly_summary_quantiles %>%
  filter(!Data == "Buffalo" & variable == "ndvi_mean"),
aes(x = hour_t1, y = q025, colour = Data),
linetype = "dashed",
alpha = path_95_alpha) +

geom_path(data = hourly_summary_quantiles %>%
  filter(!Data == "Buffalo" & variable == "ndvi_mean"),
aes(x = hour_t1, y = q975, colour = Data),
linetype = "dashed",
alpha = path_95_alpha) +

geom_path(data = hourly_summary_quantiles %>%
  filter(Data == "Buffalo" & variable == "ndvi_mean"),
aes(x = hour_t1, y = mean, colour = Data),
linewidth = 1) +

geom_path(data = hourly_summary_quantiles %>%
  filter(!Data == "Buffalo" & variable == "ndvi_mean"),
aes(x = hour_t1, y = mean, colour = Data),
linewidth = 1) +


```

```

scale_fill_manual(values = colors) +
scale_colour_manual(values = colors) +
scale_y_continuous("Mean value") +
scale_x_continuous("Hour", breaks = seq(0,24,3)) +
ggtitle("NDVI") +
theme_bw()

```

hourly\_path\_ndvi\_plot

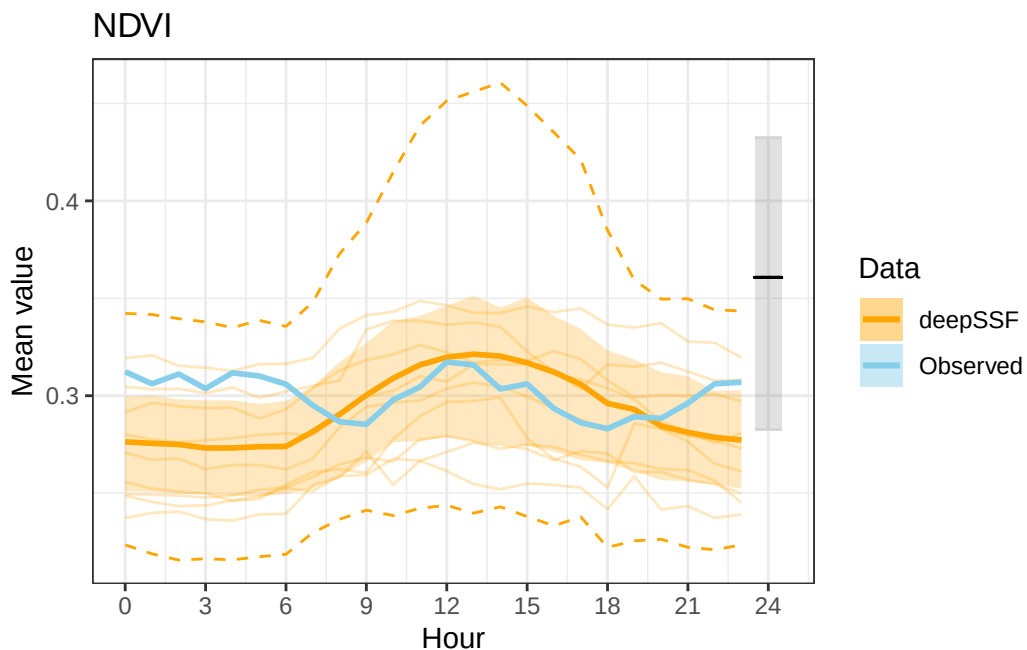

## Canopy cover

```

hourly_path_canopy_plot <- ggplot() +

  geom_ribbon(data = covariate_summaries_hourly,
            aes(x = hour_t1, ymin = canopy_q25, ymax = canopy_q75),
            colour = "lightgrey", alpha = 0.15) +

  # geom_path(data = covariate_summaries_hourly,
  #           aes(x = hour_t1, y = canopy_q025),
  #           colour = "grey", linetype = "dashed") +
  #
  # geom_path(data = covariate_summaries_hourly,
  #           aes(x = hour_t1, y = canopy_q975),
  #           colour = "grey", linetype = "dashed") +

```

```

geom_path(data = covariate_summaries_hourly,
          aes(x = hour_t1, y = canopy_mean),
          colour = "black", linetype = "dashed") +

geom_ribbon(data = hourly_summary_quantiles %>%
            filter(Data == "Buffalo" & variable == "canopy_mean"),
            aes(x = hour_t1, ymin = q25, ymax = q75, fill = Data),
            alpha = ribbon_50_alpha) +

geom_ribbon(data = hourly_summary_quantiles %>%
            filter(!Data == "Buffalo" & variable == "canopy_mean"),
            aes(x = hour_t1, ymin = q25, ymax = q75, fill = Data),
            alpha = ribbon_50_alpha) +

geom_path(data = hourly_habitat_long %>% filter(id < 10) %>%
            filter(!Data == "Buffalo" & variable == "canopy_mean"),
            aes(x = hour_t1, y = value, colour = Data, group = interaction(id, Data)),
            alpha = buff_path_alpha,
            linewidth = buff_path_linewidth) +

geom_path(data = hourly_habitat_long %>%
            filter(Data == "Buffalo" & variable == "canopy_mean"),
            aes(x = hour_t1, y = value, colour = Data, group = interaction(id, Data)),
            alpha = buff_path_alpha,
            linewidth = buff_path_linewidth) +

geom_path(data = hourly_summary_quantiles %>%
            filter(!Data == "Buffalo" & variable == "canopy_mean"),
            aes(x = hour_t1, y = q025, colour = Data),
            linetype = "dashed",
            alpha = path_95_alpha) +

geom_path(data = hourly_summary_quantiles %>%
            filter(!Data == "Buffalo" & variable == "canopy_mean"),
            aes(x = hour_t1, y = q975, colour = Data),
            linetype = "dashed",
            alpha = path_95_alpha) +

geom_path(data = hourly_summary_quantiles %>%
            filter(Data == "Buffalo" & variable == "canopy_mean"),
            aes(x = hour_t1, y = mean, colour = Data),
            linewidth = 1) +


geom_path(data = hourly_summary_quantiles %>%

```

```
filter(!Data == "Buffalo" & variable == "canopy_mean"),
aes(x = hour_t1, y = mean, colour = Data),
linewidth = 1) +
```

```
scale_fill_manual(values = colors) +
scale_colour_manual(values = colors) +
scale_y_continuous("Mean value") +
scale_x_continuous("Hour", breaks = seq(0,24,3)) +
ggtitle("Canopy cover") +
theme_bw()
```

hourly\_path\_canopy\_plot

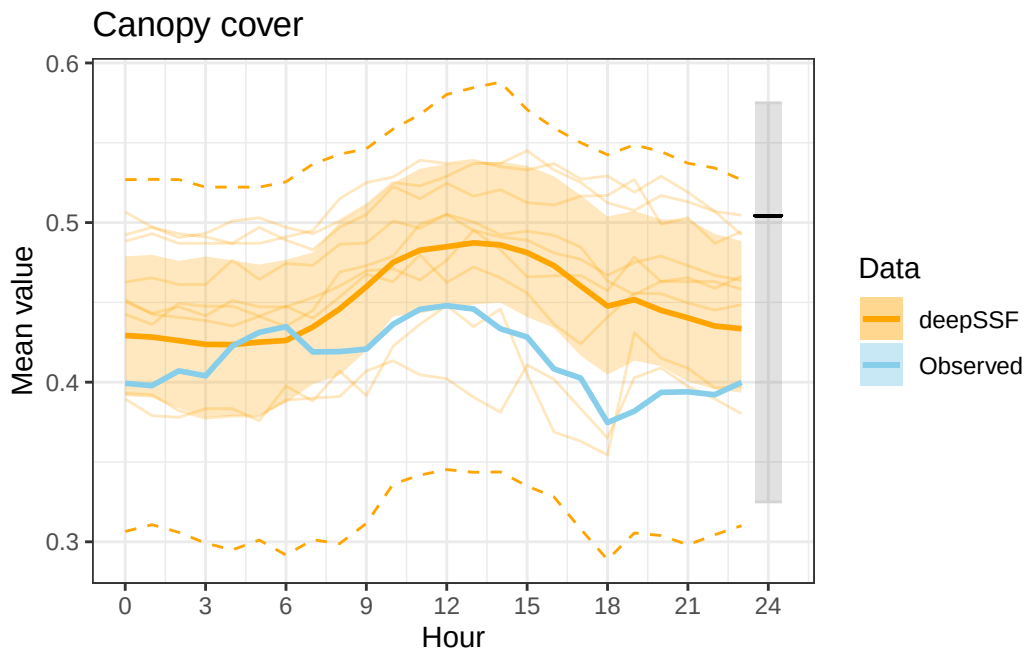

## Herbaceous vegetation

```
hourly_path_herby_plot <- ggplot() +

  geom_ribbon(data = covariate_summaries_hourly,
            aes(x = hour_t1, ymin = veg_herby_q25, ymax = veg_herby_q75),
            colour = "lightgrey", alpha = 0.15) +

  # geom_path(data = covariate_summaries_hourly,
  #           aes(x = hour_t1, y = veg_herby_q025),
  #           colour = "grey", linetype = "dashed") +
```

```

#
# geom_path(data = covariate_summaries_hourly,
#           aes(x = hour_t1, y = veg_herby_q975),
#           colour = "grey", linetype = "dashed") +

geom_path(data = covariate_summaries_hourly,
          aes(x = hour_t1, y = veg_herby_mean),
          colour = "black", linetype = "dashed") +

geom_ribbon(data = hourly_summary_quantiles %>%
            filter(Data == "Buffalo" & variable == "herby_mean"),
            aes(x = hour_t1, ymin = q25, ymax = q75, fill = Data),
            alpha = ribbon_50_alpha) +

geom_ribbon(data = hourly_summary_quantiles %>%
            filter(!Data == "Buffalo" & variable == "herby_mean"),
            aes(x = hour_t1, ymin = q25, ymax = q75, fill = Data),
            alpha = ribbon_50_alpha) +

geom_path(data = hourly_habitat_long %>% filter(id < 10) %>%
            filter(!Data == "Buffalo" & variable == "herby_mean"),
            aes(x = hour_t1, y = value, colour = Data, group = interaction(id, Data)),
            alpha = buff_path_alpha,
            linewidth = buff_path_linewidth) +

geom_path(data = hourly_habitat_long %>%
            filter(Data == "Buffalo" & variable == "herby_mean"),
            aes(x = hour_t1, y = value, colour = Data, group = interaction(id, Data)),
            alpha = buff_path_alpha,
            linewidth = buff_path_linewidth) +

geom_path(data = hourly_summary_quantiles %>%
            filter(!Data == "Buffalo" & variable == "herby_mean"),
            aes(x = hour_t1, y = q025, colour = Data),
            linetype = "dashed",
            alpha = path_95_alpha) +

geom_path(data = hourly_summary_quantiles %>%
            filter(!Data == "Buffalo" & variable == "herby_mean"),
            aes(x = hour_t1, y = q975, colour = Data),
            linetype = "dashed",
            alpha = path_95_alpha) +

geom_path(data = hourly_summary_quantiles %>%

```

```


    filter(Data == "Buffalo" & variable == "herby_mean"),
    aes(x = hour_t1, y = mean, colour = Data),
    linewidth = 1) +

geom_path(data = hourly_summary_quantiles %>%
    filter(!Data == "Buffalo" & variable == "herby_mean"),
    aes(x = hour_t1, y = mean, colour = Data),
    linewidth = 1) +

scale_fill_manual(values = colors) +
scale_colour_manual(values = colors) +
scale_y_continuous("Mean value") +
scale_x_continuous("Hour", breaks = seq(0,24,3)) +
ggtitle("Herbaceous vegetation") +
theme_bw()

hourly_path_herby_plot

```

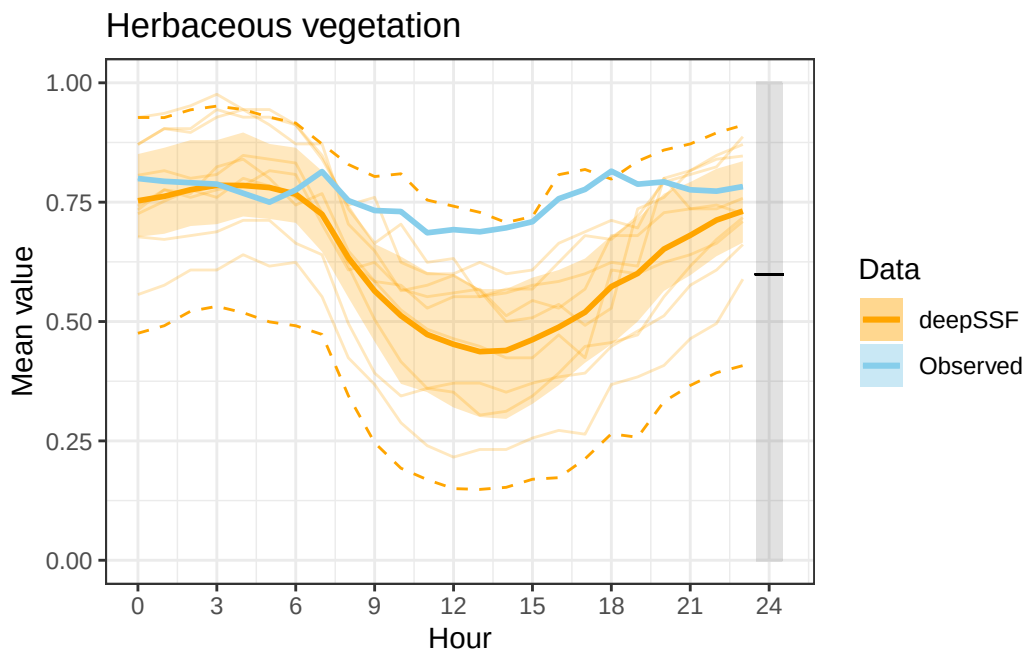

## Slope

```

hourly_path_slope_plot <- ggplot() +

    geom_ribbon(data = covariate_summaries_hourly,
    aes(x = hour_t1, ymin = slope_q25, ymax = slope_q75),

```

```

    colour = "lightgrey", alpha = 0.15) +

# geom_path(data = covariate_summaries_hourly,
#           aes(x = hour_t1, y = slope_q025),
#           colour = "grey", linetype = "dashed") +
#
# geom_path(data = covariate_summaries_hourly,
#           aes(x = hour_t1, y = slope_q975),
#           colour = "grey", linetype = "dashed") +

geom_path(data = covariate_summaries_hourly,
          aes(x = hour_t1, y = slope_mean),
          colour = "black", linetype = "dashed") +

geom_ribbon(data = hourly_summary_quantiles %>%
            filter(Data == "Buffalo" & variable == "slope_mean"),
            aes(x = hour_t1, ymin = q25, ymax = q75, fill = Data),
            alpha = ribbon_50_alpha) +

geom_ribbon(data = hourly_summary_quantiles %>%
            filter(!Data == "Buffalo" & variable == "slope_mean"),
            aes(x = hour_t1, ymin = q25, ymax = q75, fill = Data),
            alpha = ribbon_50_alpha) +

geom_path(data = hourly_habitat_long %>% filter(id < 10) %>%
            filter(!Data == "Buffalo" & variable == "slope_mean"),
            aes(x = hour_t1, y = value, colour = Data, group = interaction(id, Data)),
            alpha = buff_path_alpha,
            linewidth = buff_path_linewidth) +

geom_path(data = hourly_habitat_long %>%
            filter(Data == "Buffalo" & variable == "slope_mean"),
            aes(x = hour_t1, y = value, colour = Data, group = interaction(id, Data)),
            alpha = buff_path_alpha,
            linewidth = buff_path_linewidth) +

geom_path(data = hourly_summary_quantiles %>%
            filter(!Data == "Buffalo" & variable == "slope_mean"),
            aes(x = hour_t1, y = q025, colour = Data),
            linetype = "dashed",
            alpha = path_95_alpha) +

geom_path(data = hourly_summary_quantiles %>%
            filter(!Data == "Buffalo" & variable == "slope_mean"),

```



```

    aes(x = hour_t1, y = q975, colour = Data),
    linetype = "dashed",
    alpha = path_95_alpha) +


geom_path(data = hourly_summary_quantiles %>%
  filter(Data == "Buffalo" & variable == "slope_mean"),
  aes(x = hour_t1, y = mean, colour = Data),
  linewidth = 1) +

geom_path(data = hourly_summary_quantiles %>%
  filter(!Data == "Buffalo" & variable == "slope_mean"),
  aes(x = hour_t1, y = mean, colour = Data),
  linewidth = 1) +

scale_fill_manual(values = colors) +
scale_colour_manual(values = colors) +
scale_y_continuous("Mean value") +
scale_x_continuous("Hour", breaks = seq(0,24,3)) +
ggtitle("Slope") +
theme_bw()

hourly_path_slope_plot

```

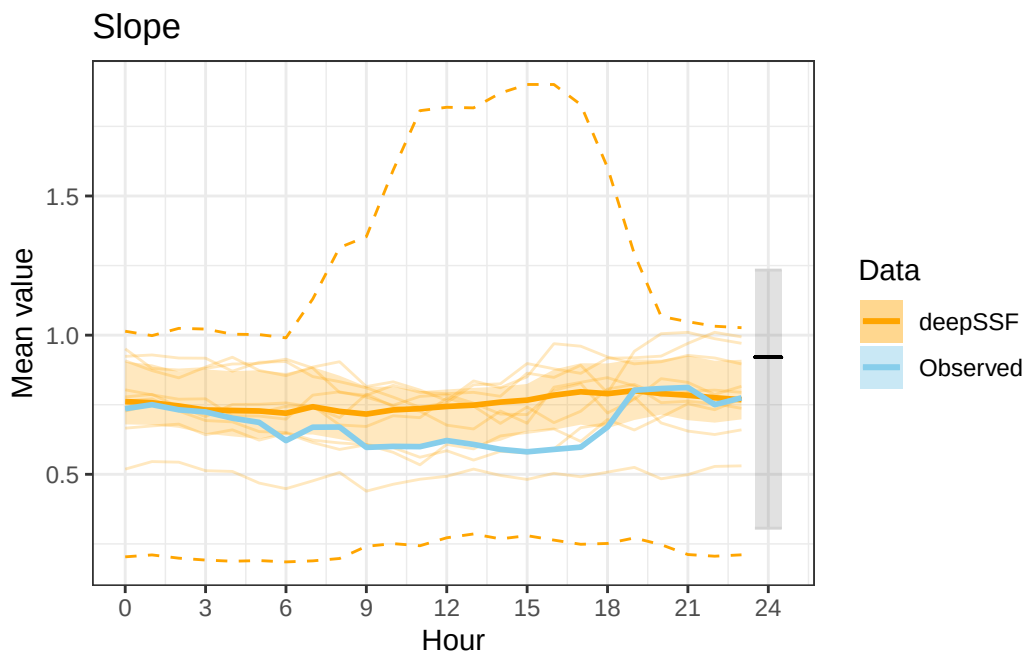

## Combining the hourly plots

```
ggarrange(step_lengths_stationary,  
  
          step_lengths_log,  
  
          # hourly_path_herby_plot,  
          #  
          # hourly_path_canopy_plot +  
          #   theme(axis.title.y = element_blank())),  
  
          labels = c("A", "B"),  
          ncol = 1, nrow = 2,  
          legend = "bottom",  
          common.legend = TRUE)
```

Warning: Removed 147 rows containing non-finite outside the scale range  
(`stat\_density()`).

Warning: Removed 3703 rows containing non-finite outside the scale range  
(`stat\_density()`).

Warning in scale\_x\_log10("log Step length (m)": log-10 transformation  
introduced infinite values.


Warning: Removed 51 rows containing non-finite outside the scale range  
(`stat\_density()`).

Warning: Removed 147 rows containing non-finite outside the scale range  
(`stat\_density()`).

Warning: Removed 3703 rows containing non-finite outside the scale range  
(`stat\_density()`).

Warning in scale\_x\_log10("log Step length (m)": log-10 transformation  
introduced infinite values.

Warning: Removed 51 rows containing non-finite outside the scale range  
(`stat\_density()`).

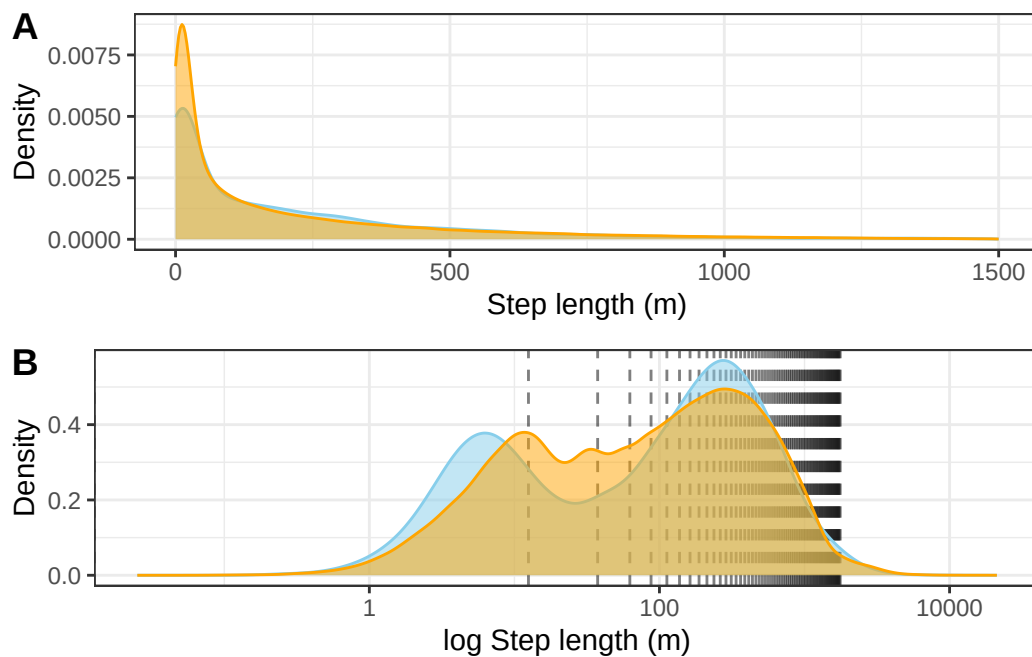

```
ggsave(paste0("Python/outputs/model_training/",deepSSF_dir,"/step_lengths_stat_log.png"), wi
```

### Step lengths instead of slope


```
ggarrange(hourly_path_sl_plot +
  theme(axis.title.x = element_blank(),
        axis.text.x = element_blank(),
        legend.title = element_blank()),

  hourly_path_ndvi_plot +
  theme(axis.title.x = element_blank(),
        axis.text.x = element_blank(),
        axis.title.y = element_blank()),

  hourly_path_herby_plot,

  hourly_path_canopy_plot +
  theme(axis.title.y = element_blank()),

  labels = c("A", "B", "C", "D"),
  ncol = 2, nrow = 2,
  legend = "bottom",
  common.legend = TRUE)
```

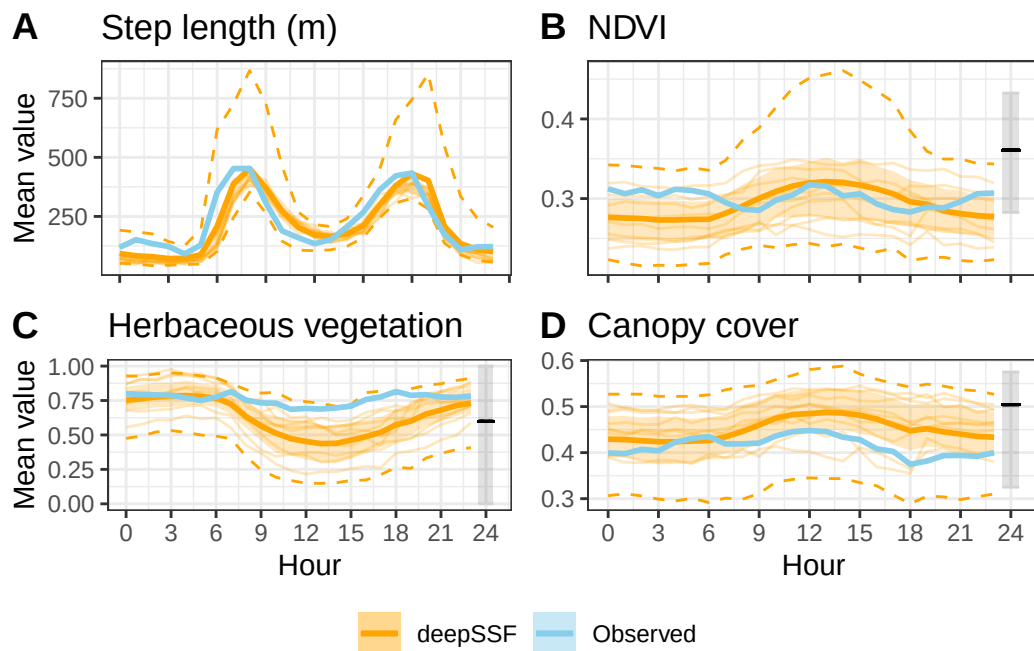

```
ggsave(paste0("Python/outputs/model_training/",deepSSF_dir,"/hourly_summaries_step.png"), wi
```

## Slope instead of step lengths


```
ggarrange(hourly_path_ndvi_plot +
  theme(axis.title.x = element_blank(),
        axis.text.x = element_blank(),
        legend.title = element_blank()),

  hourly_path_canopy_plot +
  theme(axis.title.x = element_blank(),
        axis.text.x = element_blank(),
        axis.title.y = element_blank()),

  hourly_path_herby_plot,

  hourly_path_slope_plot +
  theme(axis.title.y = element_blank()),

  labels = c("A", "B", "C", "D"),
  ncol = 2, nrow = 2,
  legend = "bottom",
  common.legend = TRUE)
```

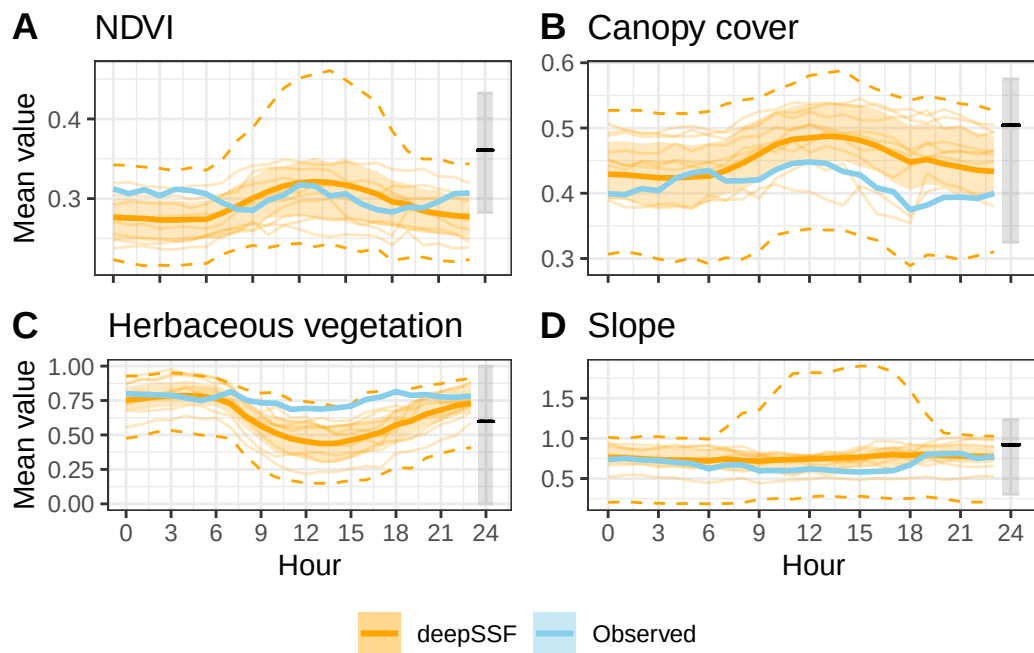

```
ggsave(paste0("Python/outputs/model_training/",deepSSF_dir,"/hourly_summaries.png"), width=1
```