Direct CXI GIN: operation granularity dominates this transport probe

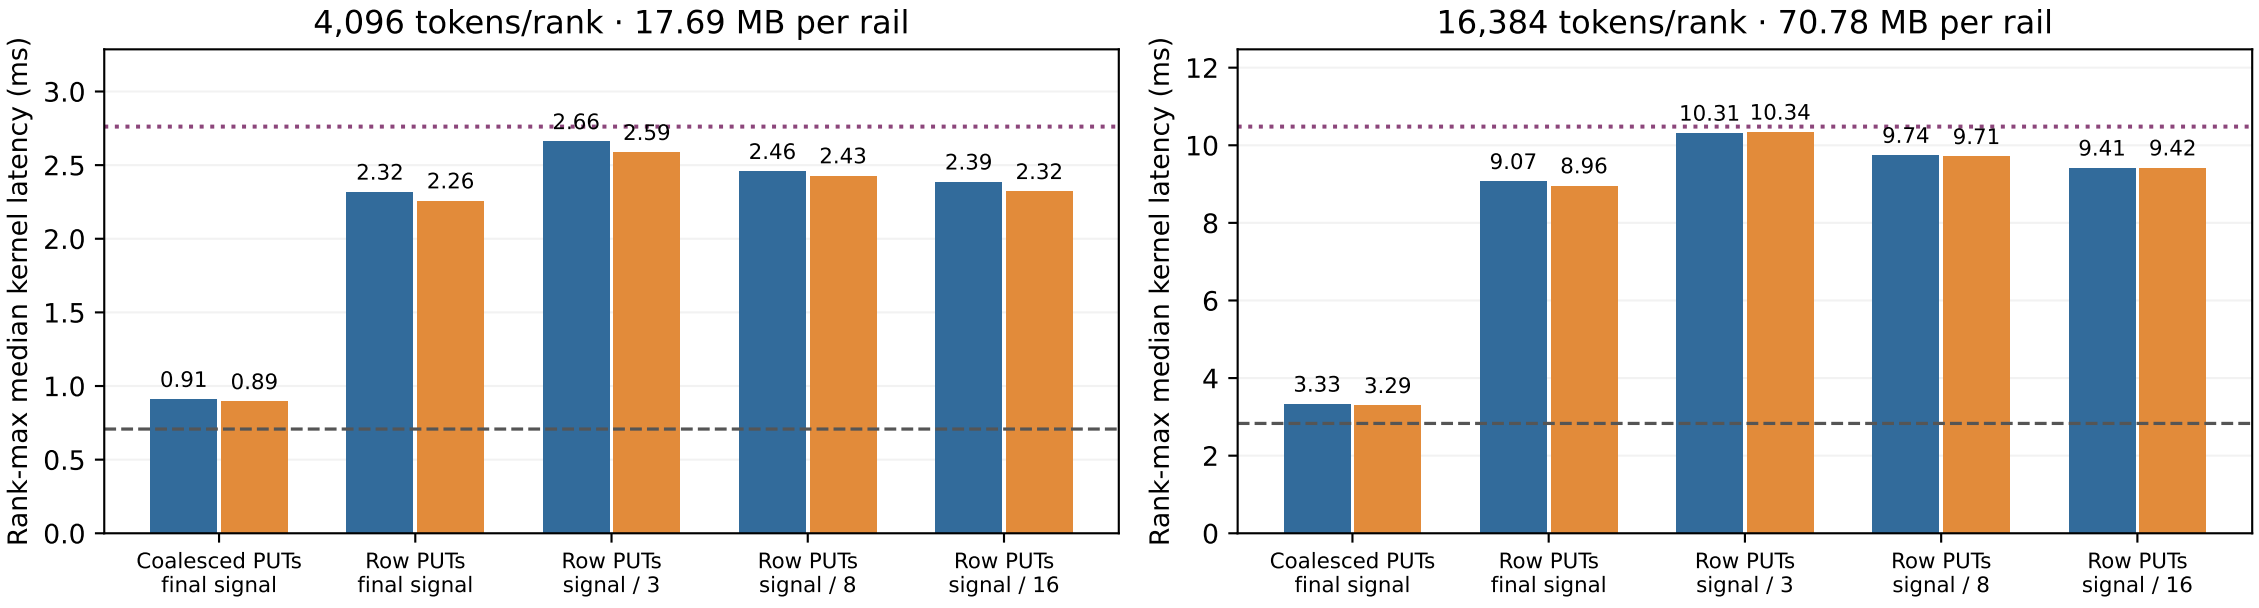

Prepacked public-GIN probe; 25 timed calls after 5 warmups; all 8 ranks validated.
No NVLink forwarding or packing. CUDA events include initial GPU readiness exchange. Bars are separate experiments, not additive stages.