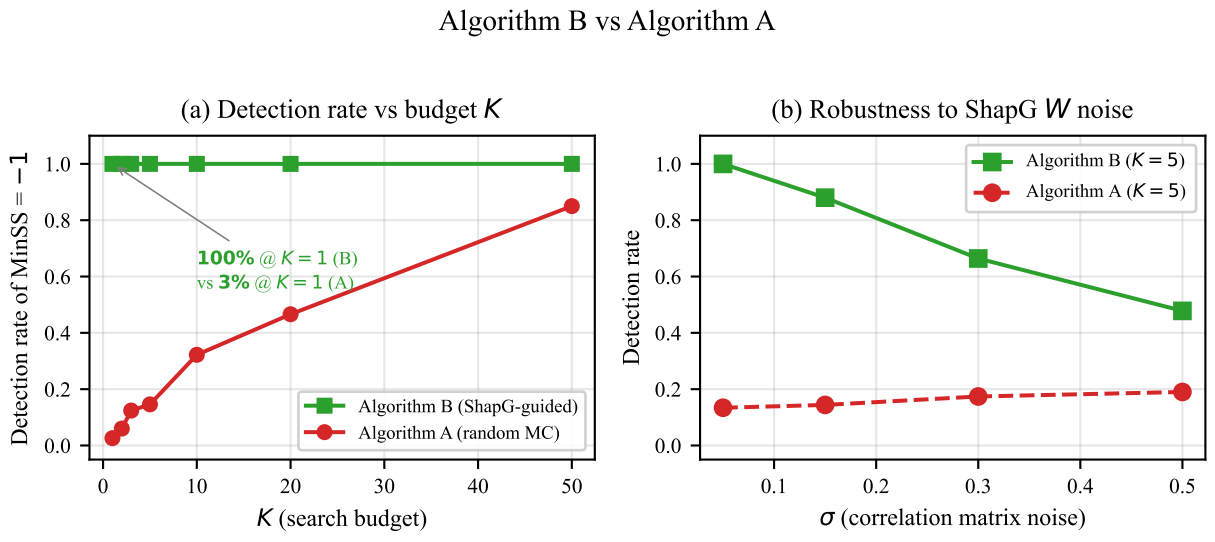
Algorithm B vs Algorithm A
(a) Detection rate vs budget K
Detection rate of MinSS $= -1$
100% @ $K = 1$ (B)
vs 3% @ $K = 1$ (A)
Algorithm B (ShapG-guided)
Algorithm A (random MC)
K (search budget)
(b) Robustness to ShapG W noise
Detection rate
Algorithm B ($K = 5$)
Algorithm A ($K = 5$)
σ (correlation matrix noise)