
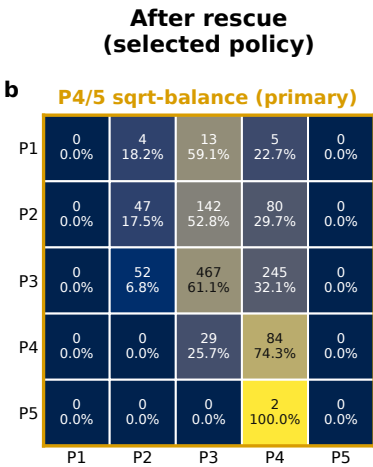


Five-class confusion matrices before and after Phase-4/5 rescue

Forecasting

n = 1,170

2022 temporal
holdout


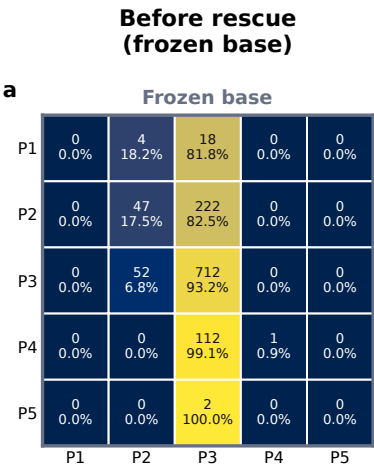


Nowcasting

n = 1,170

2022 temporal
holdout




Actual IPC phase

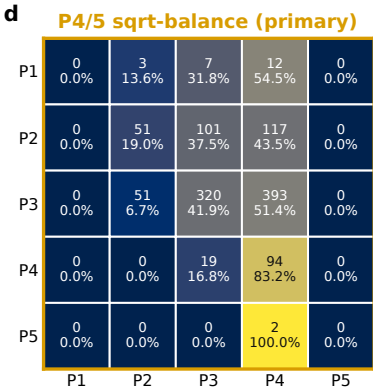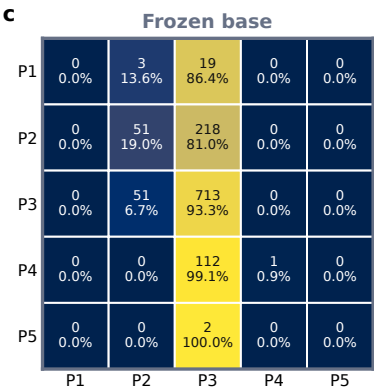

Contemporaneous

n = 5,575

Random 5-fold
full OOF

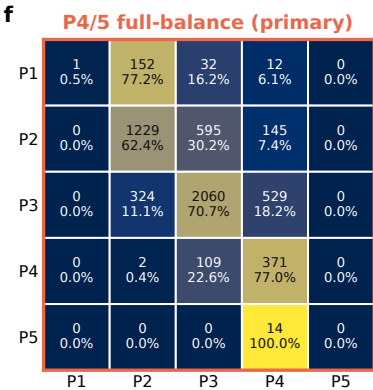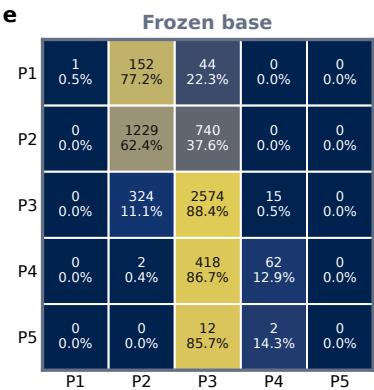

Predicted IPC phase

Within each row, both panels use the same evaluation rows and actual labels; only the permitted Phase 3 to Phase 4 rescue changes. Cells show count and percentage within each actual phase. Forecasting and Nowcasting use the fixed 2022 temporal holdout (n = 1,170 each). Contemporaneous uses seed-0 random row-level five-fold full OOF (n = 5,575); its threshold is pooled-OOF selected (not nested/independent). Protocols and populations differ across rows; cross-row performance is not directly comparable.