Crossover lifts GP well above random sampling
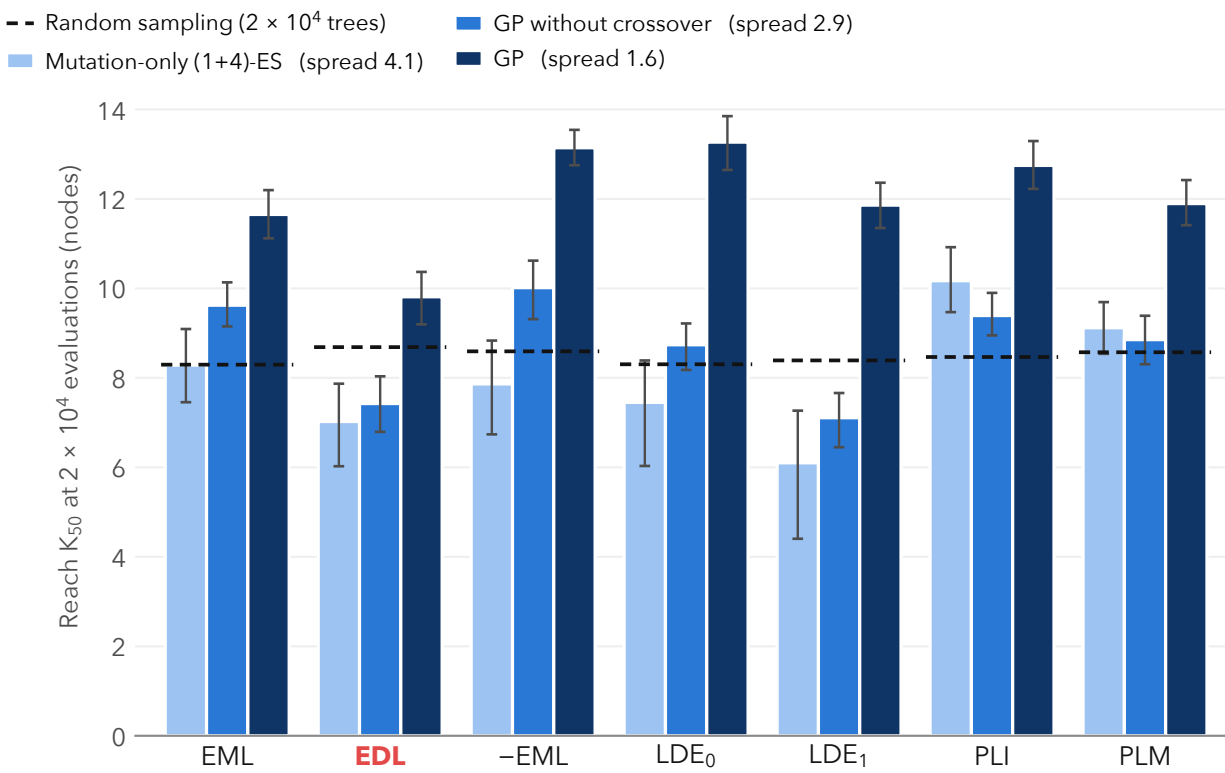
Reach per operator under three ways of searching; spread: range of the six non-EDL operators (nodes)