



# Demystifying systemd

## OHIO LINUX FEST 2015

Scott Seighman  
Solutions Architect  
Red Hat

✉ [sseighma@redhat.com](mailto:sseighma@redhat.com)

🐦 CleRHUG

# Agenda

- Brief History
- Concepts & Basic Usage
- Modifying Units
- Resource Management
- Converting init scripts
- The Journal
- nspawn
- Sneak peek at what's coming in RHEL 7.2

# Credits

- **Lennart Poettering**
  - Senior Software Engineer, Red Hat
  - Co-developer of systemd
- **Ben Breard**
  - Senior Solutions Architect, Red Hat





Keep an open mind ... and please refrain from cussing or throwing objects at the speaker




# **Brief History** init, Upstart and systemd

# Brief History of the Init Process

- **init**
  - Referenced inittab → rc scripts
  - Unexpected pauses could cause delays in boot process (serial)
  - Needed to be sequenced for dependencies (manual process)
- **Upstart**
  - Introduced as init replacement
  - Added async service startup, auto restart, event-based start
  - Also referenced inittab → /etc/init → /etc/rc.d
  - Used `initctl` for service control
- **systemd**
  - Supersedes its predecessors in terms of speed and capabilities



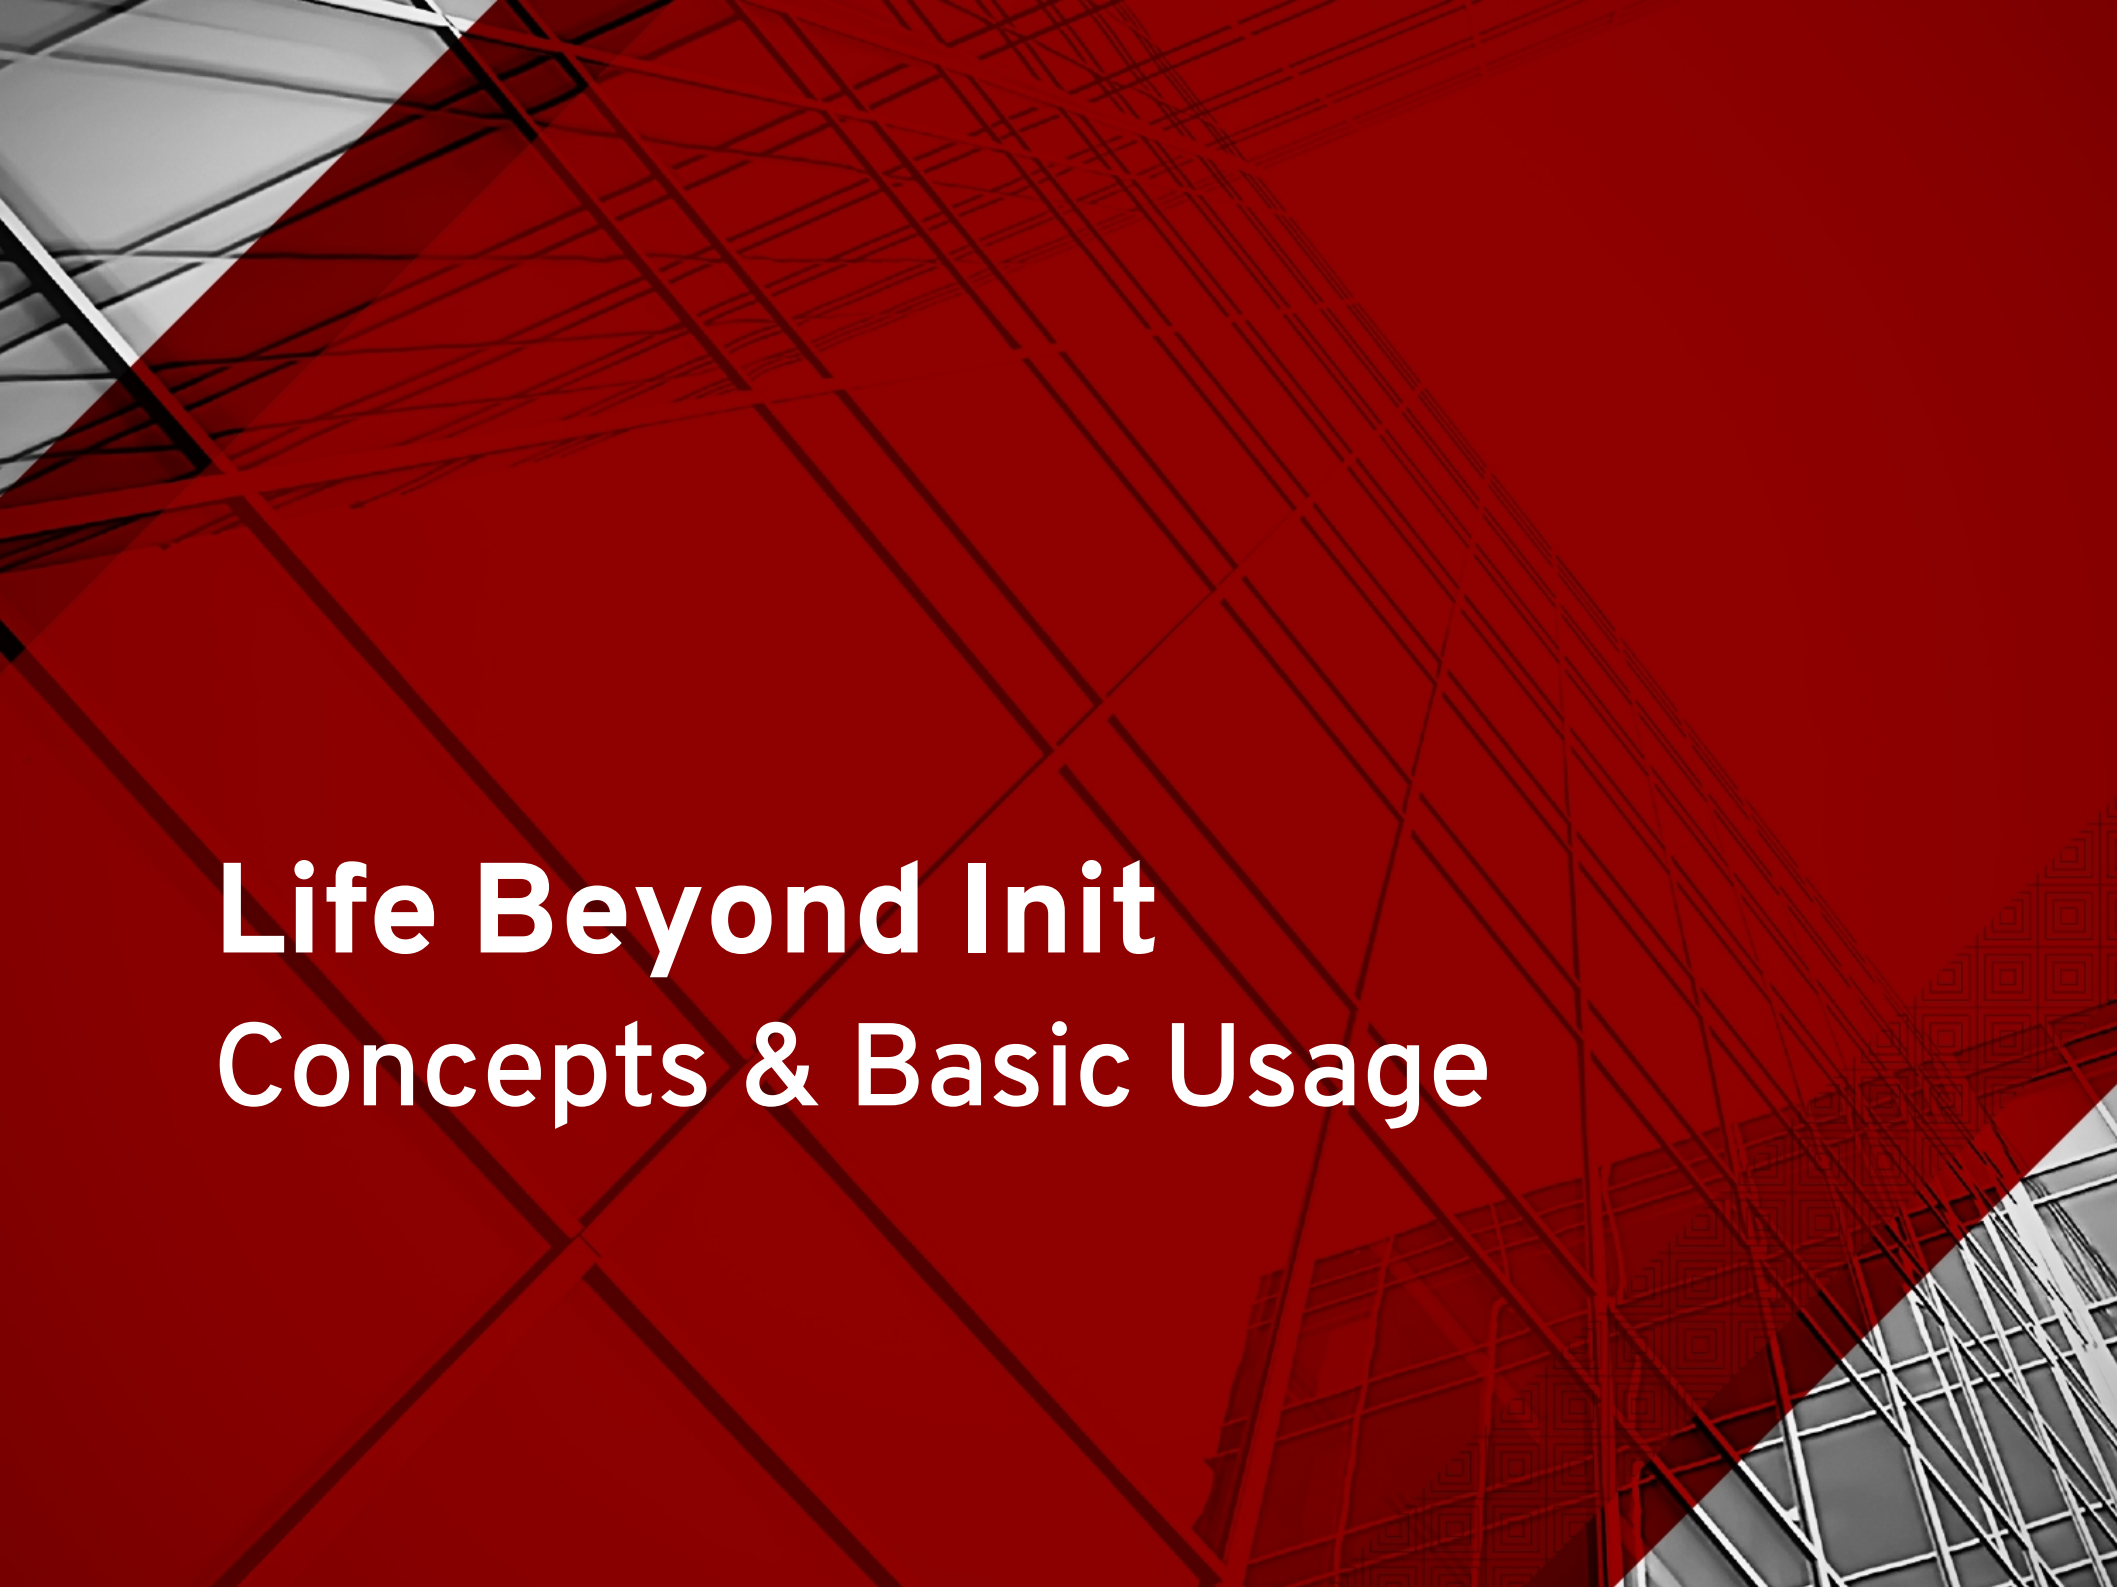


# **Life Beyond Init**

## **Concepts & Basic Usage**

# systemd

- Default init system for most Linux distributions
- Controls “units” rather than just daemons
- Handles dependency between units
- Tracks processes with service information
  - Services are owned by a cgroup.
  - Simple to configure “SLAs” for CPU, Memory, and IO
- Properly kill daemons
- Minimal boot times
- Debuggability – no early boot messages are lost
- Easy to learn and backwards compatible

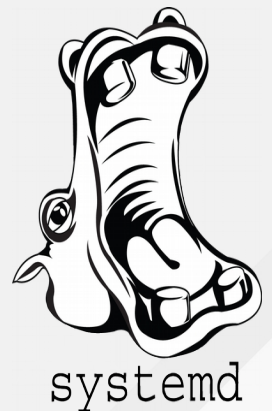



# systemd Structure

## systemd Utilities

systemctl journalctl notify analyze cglsg cgtop loginctl nspawn

## systemd Daemons

systemd  
journald networkd  
logind user session

## systemd Targets

bootmode basic multi-user graphical user-session  
shutdown reboot dbus telephony display service  
dlog logind user-session tizen service

## systemd Core

manager unit login namespace log  
systemd service timer mount target multiseat inhibit  
snapshot path socket swap session pam cgroup dbus

## systemd Libraries

dbus-1 libpam libcap libcryptsetup tcpwrapper libaudit libnotify

## Linux Kernel

cgroups autofs kdbus

# systemd Concepts: Units

- Init scripts have been replaced with service units
- Units are `systemd` objects used for organizing boot and maintenance tasks
- Units have a name and type
- Unit configs are stored in respective config files
- Service units end with the `.service` file extension and serve a similar purpose as init scripts:
  - To view, start, stop, restart, enable, or disable system services, use the `systemctl` command

# Available systemd Unit Types

Unit Type	File Extension	Description
Service Unit	.service	A system service
Target Unit	.target	A group of systemd units
Automount Unit	.automount	A filesystem automount point
Device Unit	.device	A device file recognized by the kernel
Mount Unit	.mount	A filesystem mount point
Path Unit	.path	A file or directory in a filesystem
Scope Unit	.scope	An externally created process
Slice Unit	.slice	A group of hierarchically organized units that manage system processes
Snapshot Unit	.snapshot	A saved state of the systemd manager

# Available systemd Unit Types

Unit Type	File Extension	Description
Socket Unit	.socket	An inter-process communications socket
Swap Unit	.swap	A swap device or swap file
Timer Unit	.timer	A systemd timer



# systemd Units: httpd.service

[Unit]

Description=The Apache HTTP Server

After=remote-fs.target nss-lookup.target

[Service]

Type=notify

EnvironmentFile=/etc/sysconfig/httpd

ExecStart=/usr/sbin/httpd \$OPTIONS -DFOREGROUND

ExecReload=/usr/sbin/httpd \$OPTIONS -k graceful

ExecStop=/usr/sbin/httpd \$OPTIONS -k graceful-stop

PrivateTmp=true

[Install]

WantedBy=multi-user.target

\*Comments were removed for readability

# systemd Units: Locations

Directory	Description
/usr/lib/systemd/system/	Systemd units distributed with RPM installed packages.
/run/systemd/system/	Systemd units created at runtime. This directory takes precedence over the directory with installed service units. <b>Non-persistent.</b>
/etc/systemd/system/	Systemd units created and managed by the <b>system administrator</b> . This directory takes precedence over the directory with runtime units.

**Note:** Unit files in /etc take precedence over /usr

# Compatibility Changes

- `systemd` has only limited support for runlevels
- `systemctl` utility does not support custom commands
- `systemctl` utility does not communicate with services not started by `systemd`
- `systemd` stops only running services
- System services are unable to read from the standard input stream

# Compatibility Changes *(cont.)*

- System services do not inherit any context (such as the HOME and PATH environment variables) from the invoking user and their session
- When loading a SysV init script, `systemd` reads dependency information encoded in the Linux Standard Base (LSB) header and interprets it at run time
- All operations on service units are subject to a timeout of 5 minutes to prevent a malfunctioning service from freezing the system



# systemd startup flow

Initiates services  
concurrently

Allows `systemd` to handle service  
order dependencies; services start  
without delay

Instantaneously creates  
sockets for enabled services

`systemd` creates all sockets first,  
daemons next

Passes to daemon processes  
to start in parallel

Daemons need not be running, they  
only need the correct socket to be  
available

Maintains sockets and uses  
them to reconnect services

Daemons not yet running are cached  
in socket buffer and filled when  
daemons come online

# Managing Services: Start/Stop

## Init

```
service httpd {start,stop,restart,reload}
```

## systemd

```
systemctl httpd.service {start,stop,restart,reload}
```

# Managing Services: Start/Stop

- Glob units to work with multiple services

```
systemctl restart httpd mariadb
```

- When the unit “type” isn't specified, `.service` is assumed.

```
systemctl start httpd = systemctl start httpd.service
```

- Make life easy and install shell completion

- `yum install bash-completion`

- `systemctl [tab] [tab]`

- Add bash-completion to your SOE and minimal kickstarts

- Connect directly to remote hosts

```
systemctl -H [hostname] restart httpd
```

# Managing Services: Status

## Init

- `service httpd status`

## systemd

- `systemctl status httpd`

**Tip:** pass `-l` if the logs are cutoff



# Managing Services: Status

```
[root@fedora-22 ~]# systemctl status httpd
● httpd.service - The Apache HTTP Server
   Loaded: loaded (/usr/lib/systemd/system/httpd.service; disabled; vendor preset: disabled)
   Active: active (running) since Wed 2015-08-26 17:07:12 EDT; 11s ago
 Main PID: 7014 (httpd)
   Status: "Total requests: 0; Idle/Busy workers 100/0;Requests/sec: 0; Bytes served/sec:  0 B/sec"
   CGroup: /system.slice/httpd.service
           └─7014 /usr/sbin/httpd -DFOREGROUND
             └─7136 /usr/sbin/httpd -DFOREGROUND
               └─7137 /usr/sbin/httpd -DFOREGROUND
                 └─7139 /usr/sbin/httpd -DFOREGROUND
                   └─7140 /usr/sbin/httpd -DFOREGROUND
                     └─7141 /usr/sbin/httpd -DFOREGROUND

Aug 26 17:07:12 fedora-22.example.com systemd[1]: Starting The Apache HTTP Server...
Aug 26 17:07:12 fedora-22.example.com systemd[1]: Started The Apache HTTP Server.
[root@fedora-22 ~]#
```

# Managing Services: Status

- List loaded services:
  - `systemctl -t service`
- List installed services:
  - `systemctl list-unit-files -t service` (like `chkconfig -list`)
- Check for services in failed state:
  - `systemctl --state failed`

# Managing Services: Enable/Disable

## Init

- `chkconfig httpd {on,off}`

## systemd

- `systemctl {enable, disable} httpd`

**Tip:** Globing units will clean up your kickstarts

- `systemctl enable httpd mariadb ntpd  
lm_sensors [etc]`

# Targets == Runlevels

- “Runlevels” are exposed as target units
- More meaningful names:
  - multi-user.target vs. runlevel3
  - graphical.target vs. runlevel5
- View the default target: `systemctl get-default`
- Set the default target: `systemctl set-default [target]`
- Change at run-time: `systemctl isolate [target]`

**Note:** `/etc/inittab` is no longer used.



# Cockpit is now in RHEL Extras

FEDORA WORKSTATION EDITION root

fedora-22.example.c... Dashboard

System  
Services  
Containers  
Journal  
Networking  
Storage  
Tools  
Administrator Accounts  
Terminal

Targets System Services Sockets Timers Paths

Enabled		
Install ABRT coredump hook	abrt-ccpp.service	active (exited)
ABRT kernel log watcher	abrt-oops.service	active (running)
Harvest vmcores for ABRT	abrt-vmcore.service	inactive (dead)
ABRT Xorg log watcher	abrt-xorg.service	inactive (dead)
ABRT Automated Bug Reporting Tool	abrt.service	active (running)
Accounts Service	accounts-daemon.service	active (running)
Job spooling tools	atd.service	active (running)
Security Auditing Service	auditd.service	active (running)
Avahi mDNS/DNS-SD Stack	avahi-daemon.service	active (running)
Bluetooth service	bluetooth.service	active (running)
NTP client/server	chronyd.service	active (running)
Command Scheduler	crond.service	active (running)
CUPS Scheduler	cups.service	active (running)
Activation of DM RAID sets	dmraid-activation.service	inactive (dead)

# systemd Sockets

- Have a .socket extension
- Represent inter-process communication (IPC) sockets
- Used to delay start of a service at boot time and to start less frequently used apps on demand
- Similar in principle to services which use xinetd

# Sockets

## `tftp.socket`

`[Unit]`

`Description=Tftp Server`  
`Activation Socket`

`[Socket]`

`ListenDatagram=69`

`[Install]`

`WantedBy=sockets.target`

## `tftp.service`

`[Unit]`

`Description=Tftp Server`

`[Service]`

`ExecStart=/usr/sbin/initft`  
`pd -s /var/lib/tftpboot`  
`StandardInput=socket`

`man systemd.socket`

# Sockets

## cockpit.socket

[Unit]

Description=Cockpit Web  
Server Socket

Documentation=man:cockpit  
-ws(8)

[Socket]

ListenStream=9090

[Install]

WantedBy=sockets.target

## cockpit.service

[Unit]

Description=Cockpit Web Server  
Documentation=man:cockpit-ws(8)

[Service]

ExecStartPre=/usr/sbin/remotectl  
cert --ensure --user=root  
--group=cockpit-ws

ExecStart=/usr/libexec/cockpit-ws

PermissionsStartOnly=true

User=cockpit-ws

Group=cockpit-ws

# Timers

fstrim.timer

[Unit]

Description=Discard unused  
blocks once a week

[Timer]

OnStartupSec=10min

OnCalendar=weekly

AccuracySec=1h

Persistent=true

[Install]

WantedBy=multi-user.target

fstrim.service

[Unit]

Description=Discard unused  
blocks

[Service]

Type=oneshot

ExecStart=/usr/sbin/fstrim /

man systemd.timer



# Customizing Units



# What's Available?

- List a unit's properties:
  - `systemctl show --all httpd`
- Query a single property:
  - `systemctl show -p Restart httpd`
  - `Restart=no`
- Helpful man files: `systemd.exec` and `systemd.service`
  - Restart, Nice, CPUAffinity, OOMScoreAdjust, LimitNOFILE, etc

**Disclaimer:** just because you can configure something doesn't mean you should!

# Customizing Units: Drop-ins

## 1) Create directory

```
mkdir /etc/systemd/system/[name.type.d]/
```

## 2) Create drop-in

```
vi /etc/systemd/system/httpd.service.d/50-httpd.conf
```

```
[Service]      Remember the 'S' is capitalized
```

```
Restart=always
```

```
CPUAffinity=0 1 2 3
```

```
OOMScoreAdjust=-1000
```

## 3) Notify systemd of the changes

```
systemctl daemon-reload
```

# Customizing Units: Drop-ins

```
root@host243:/etc/systemd/system/httpd.service.d

File Edit View Search Terminal Help

[root@host243 httpd.service.d]# systemctl status httpd
httpd.service - The Apache HTTP Server
  Loaded: loaded (/usr/lib/systemd/system/httpd.service; enabled)
  Drop-In: /etc/systemd/system/httpd.service.d
           └─50-httpd.conf
  Active: active (running) since Sun 2014-03-16 14:31:08 CDT; 2min 6s ago
  Process: 686 ExecStop=/bin/kill -WINCH ${MAINPID} (code=exited, status=0/SUCCESS)
  Main PID: 689 (httpd)
  Status: "Total requests: 15884; Current requests/sec: 133; Current traffic: 60KB/sec"
  CGroup: /system.slice/httpd.service
          └─689 /usr/sbin/httpd -DFOREGROUND
             └─691 /usr/sbin/httpd -DFOREGROUND
                └─692 /usr/sbin/httpd -DFOREGROUND
                   └─693 /usr/sbin/httpd -DFOREGROUND
                      └─694 /usr/sbin/httpd -DFOREGROUND
                         └─695 /usr/sbin/httpd -DFOREGROUND
                            └─715 /usr/sbin/httpd -DFOREGROUND

Mar 16 14:31:08 host243.local systemd[1]: Started The Apache HTTP Server.
```

# Customizing Units: Drop-ins

- Safe to apply on running services
  - Note: some options require a service restart to take effect
- Use `systemd-delta` to see what's been altered on a system
- Simple to use with configuration tools like Satellite, Puppet, etc.
- Simply delete the drop-in to revert to defaults.
- Don't forget `systemctl daemon-reload` when modifying units




# **Resource Management**

## **Slices, scopes, services**

# Control Groups Made Simple

Resource Management with cgroups can reduce contention and improve throughput and predictability

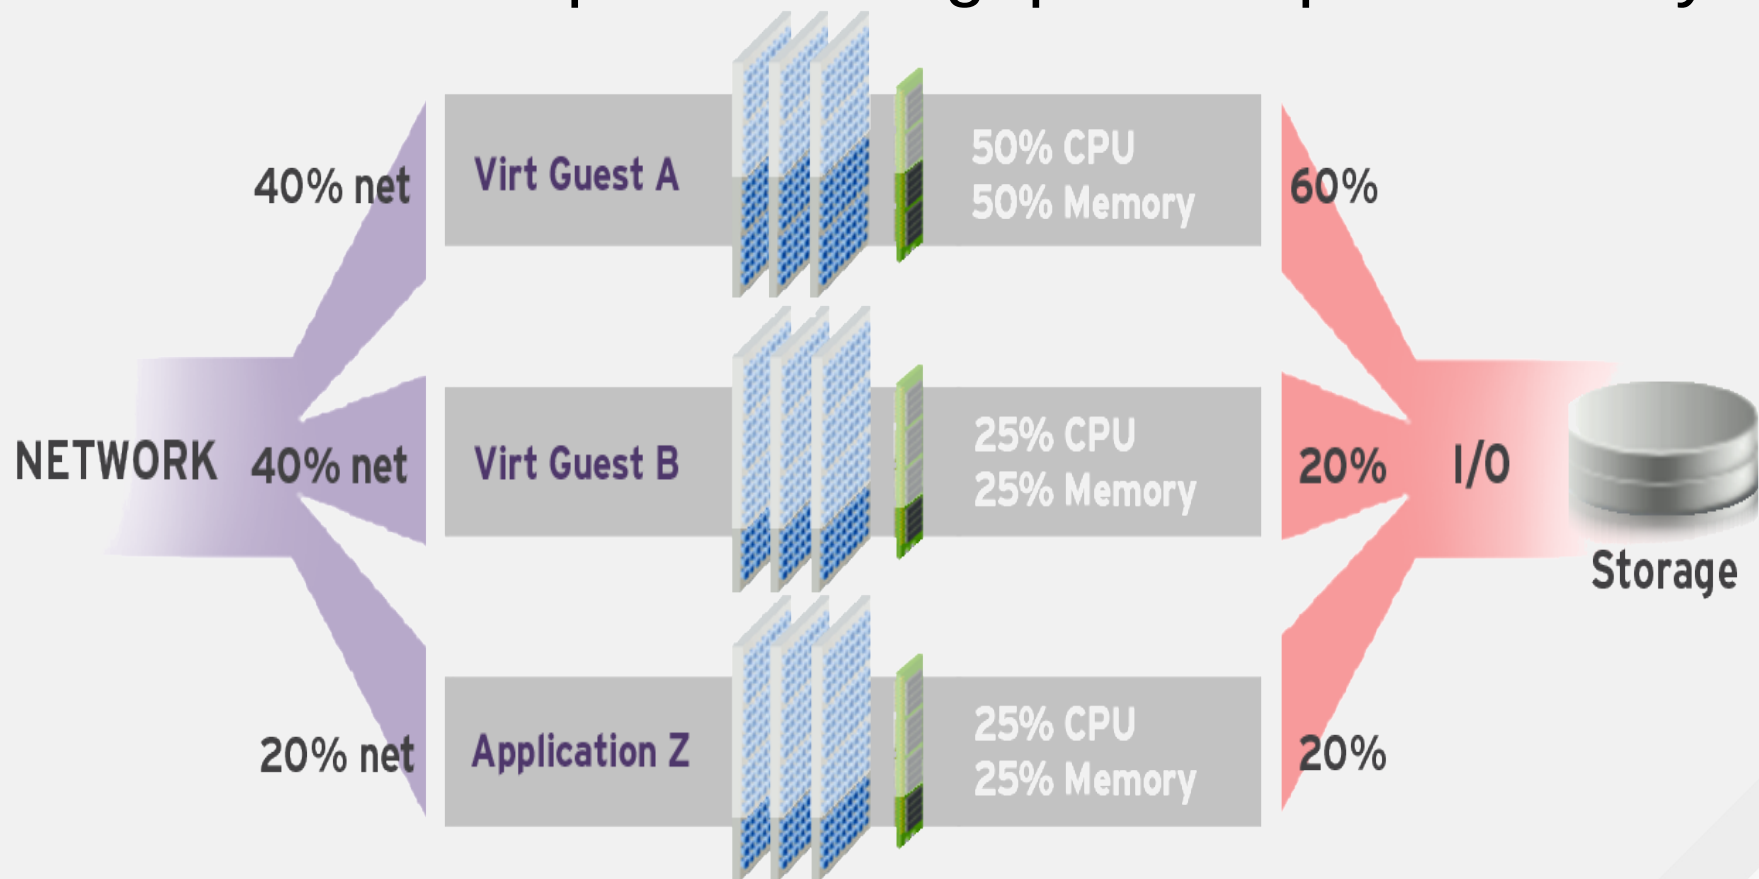

# Slices, Scopes, Services

- **Slice** – Unit type for creating the cgroup hierarchy for resource management.
- **Scope** – Organizational unit that groups a services' worker processes.
- **Service** – Process or group of processes controlled by systemd




# Understanding the Hierarchy

-/


- systemd implements a standard, single-root hierarchy under `/sys/fs/cgroup`

# Understanding the Hierarchy

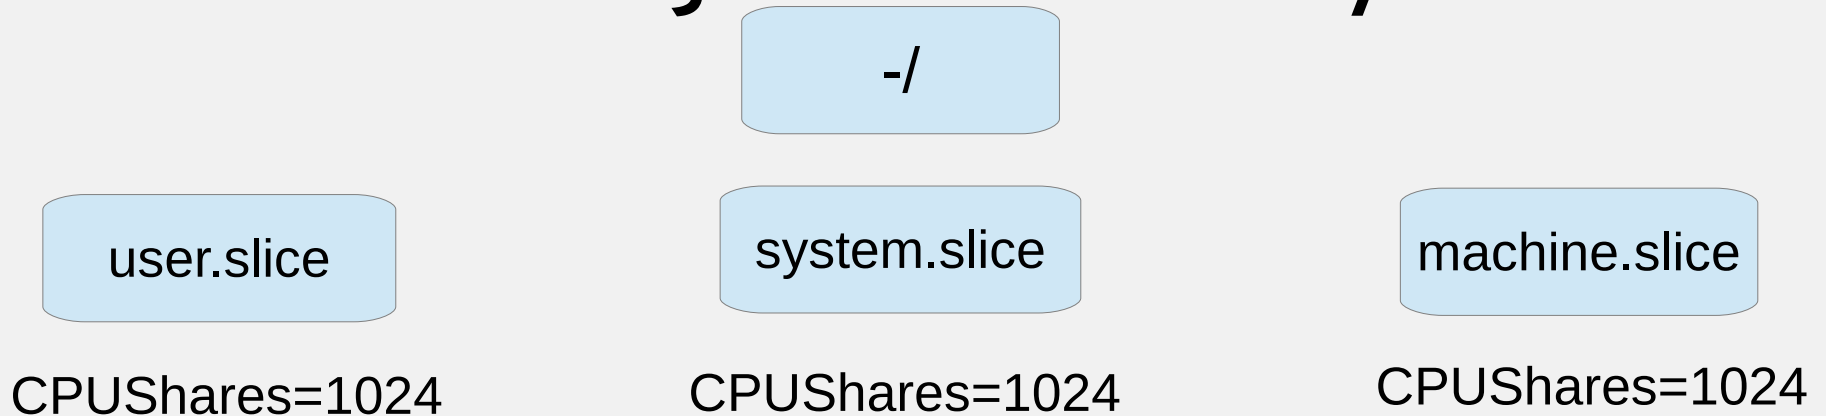


- Each slice gets equal CPU time on the scheduler.

# Understanding the Hierarchy

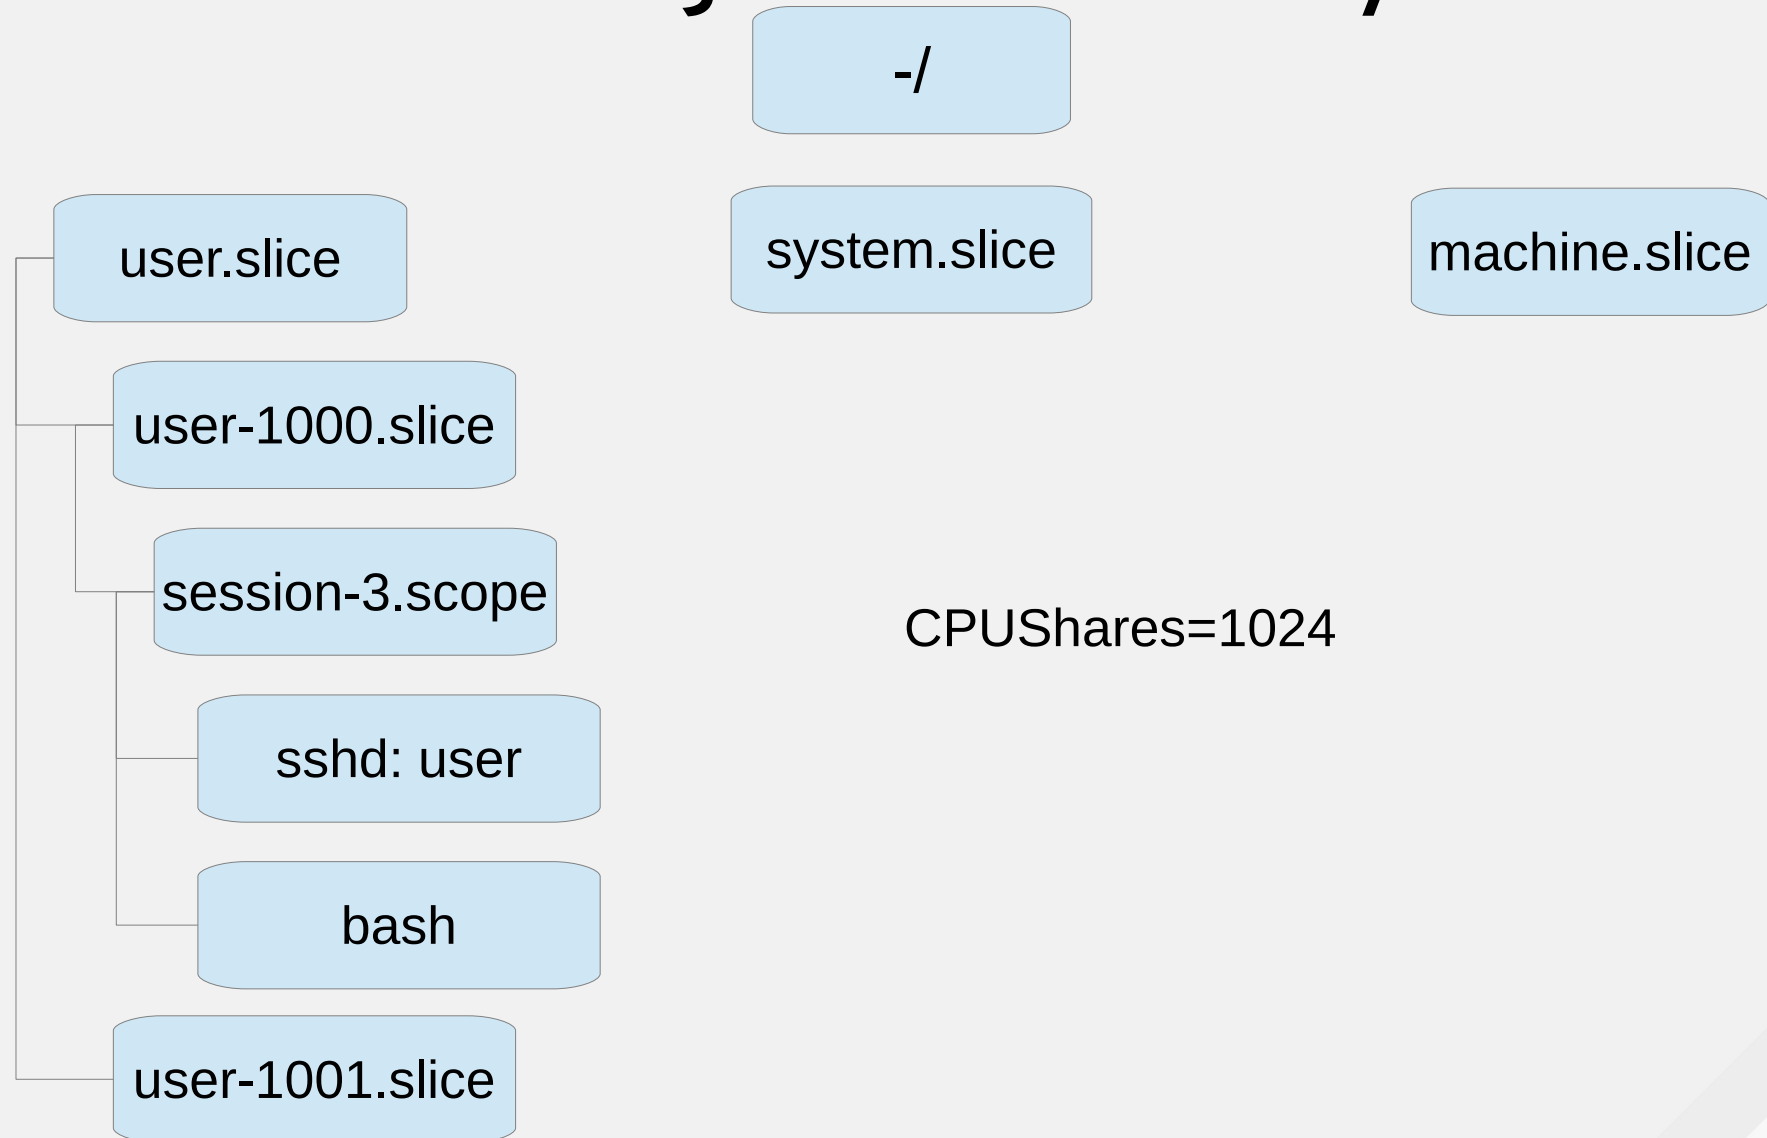

# Understanding the Hierarchy

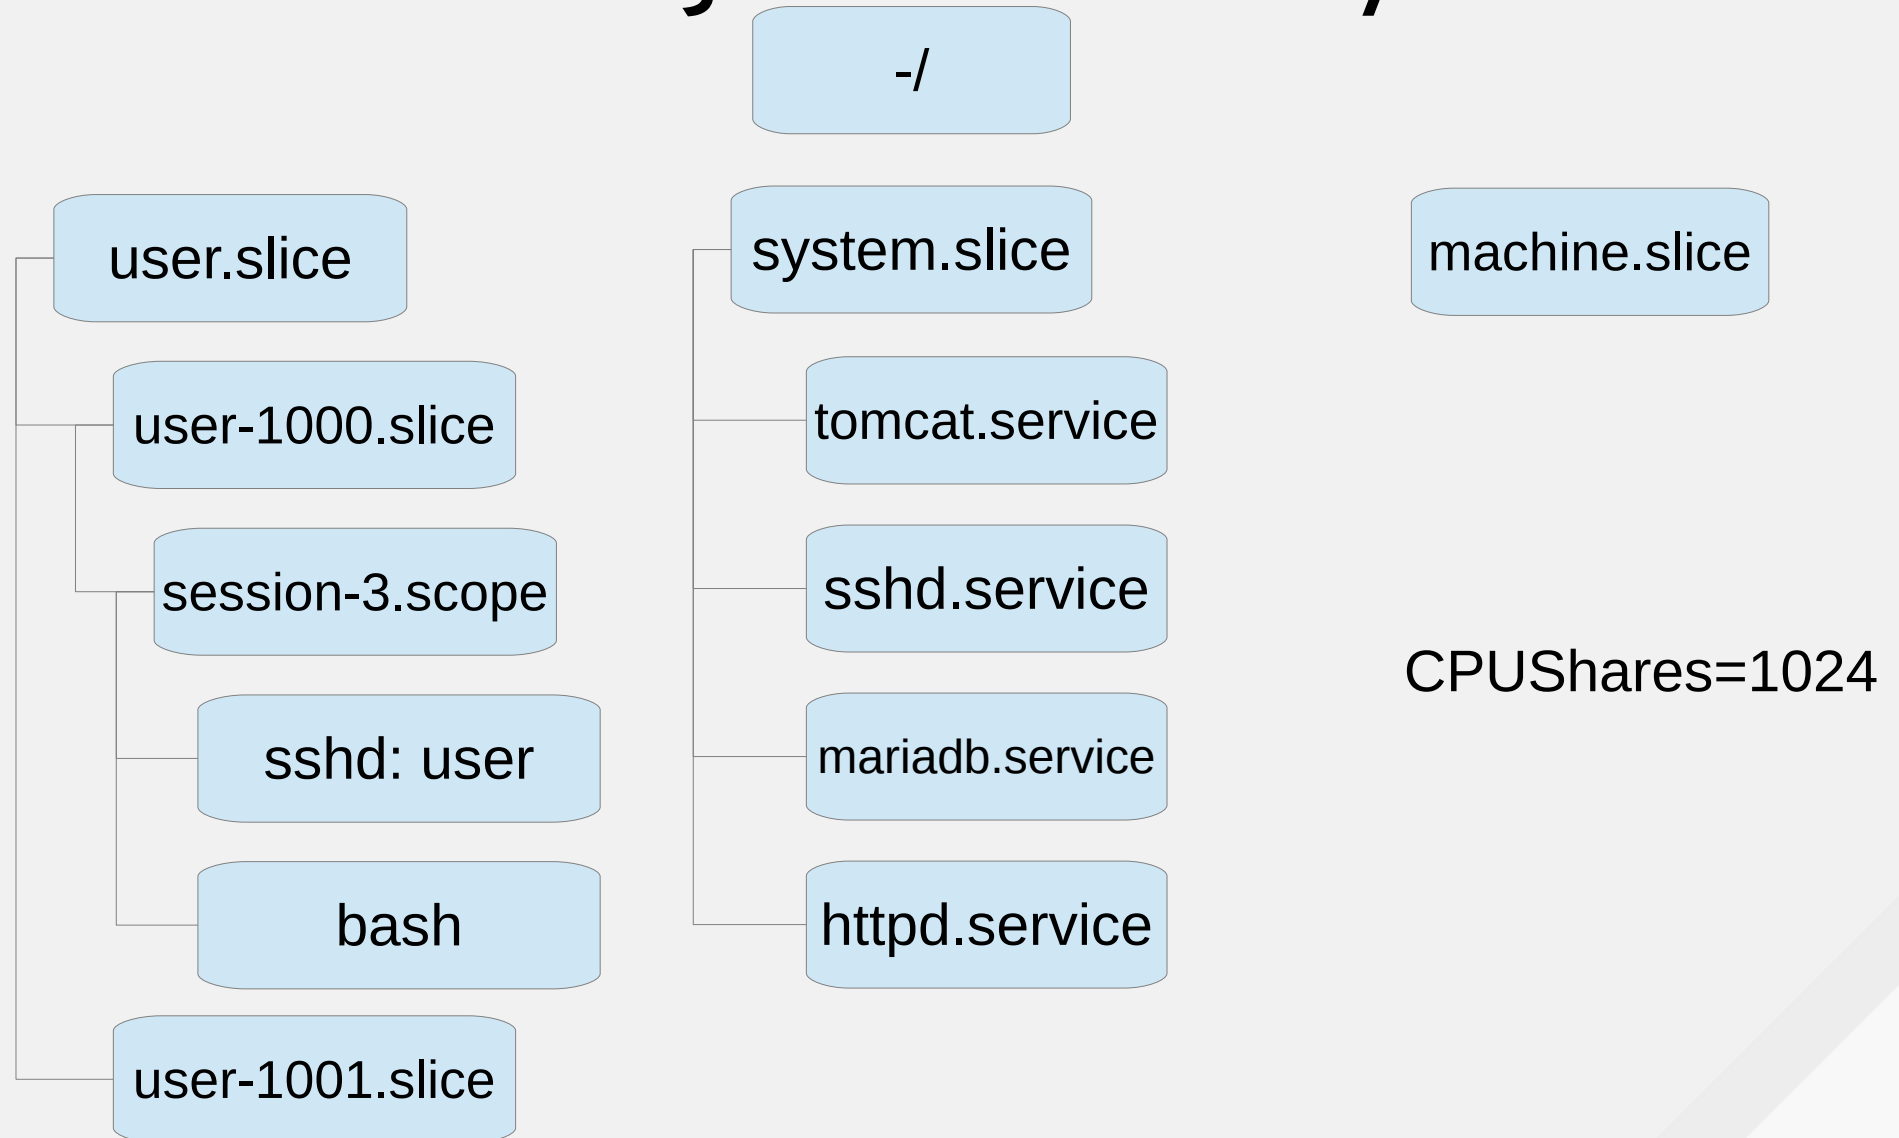

# Understanding the Hierarchy

-/

user.slice

system.slice

machine.slice

user-1000.slice

tomcat.service

vm1.scope

session-3.scope

sshd.service

/usr/bin/qemu

sshd: user

mariadb.service

vm2.scope

bash

httpd.service

/usr/bin/qemu

user-1001.slice

# Viewing Resources

- Show top control groups by their resource usage:  
`systemd-cgtop`
- Recursively show control group contents:  
`systemd-cgls`

# Resource Management – Configuration

- Configure cgroup attributes:

```
systemctl set-property --runtime httpd /  
CPUShares=2048
```

- Drop “--runtime” to persist:

```
systemctl set-property httpd CPUShares=2048
```

- Or place in the unit file:

```
[Service]  
CPUShares=2048
```

<http://0pointer.de/blog/projects/resources.html>



# Resource Management – CPU & MEM

- CPUAccounting=1 to enable
- CPUShares – default is 1024.
- Increase to assign more CPU to a service
  - e.g. CPUShares=1600
- MemoryAccounting=1 to enable
- MemoryLimit=
- Use K, M, G, T suffixes
  - MemoryLimit=1G

<https://www.kernel.org/doc/Documentation/scheduler/sched-design-CFS.txt>

<https://www.kernel.org/doc/Documentation/scheduler/sched-design-CFS.txt>

<https://www.kernel.org/doc/Documentation/cgroups/memory.txt>

# Resource Management - BlkIO

- `BlockIOAccounting=1`
- `BlockIOWeight=` assigns an IO weight to a specific service (requires CFQ)
  - Similar to CPU shares
  - Default is 1000
  - Range 10 – 1000
  - Can be defined per device (or mount point)
- `BlockIOReadBandwidth & BlockIOWriteBandwidth`
  - `BlockIOWriteBandwidth=/var/log 5M`


<https://www.kernel.org/doc/Documentation/cgroups/blkio-controller.txt>



# Converting Init Scripts

You can do it ... it's easy!



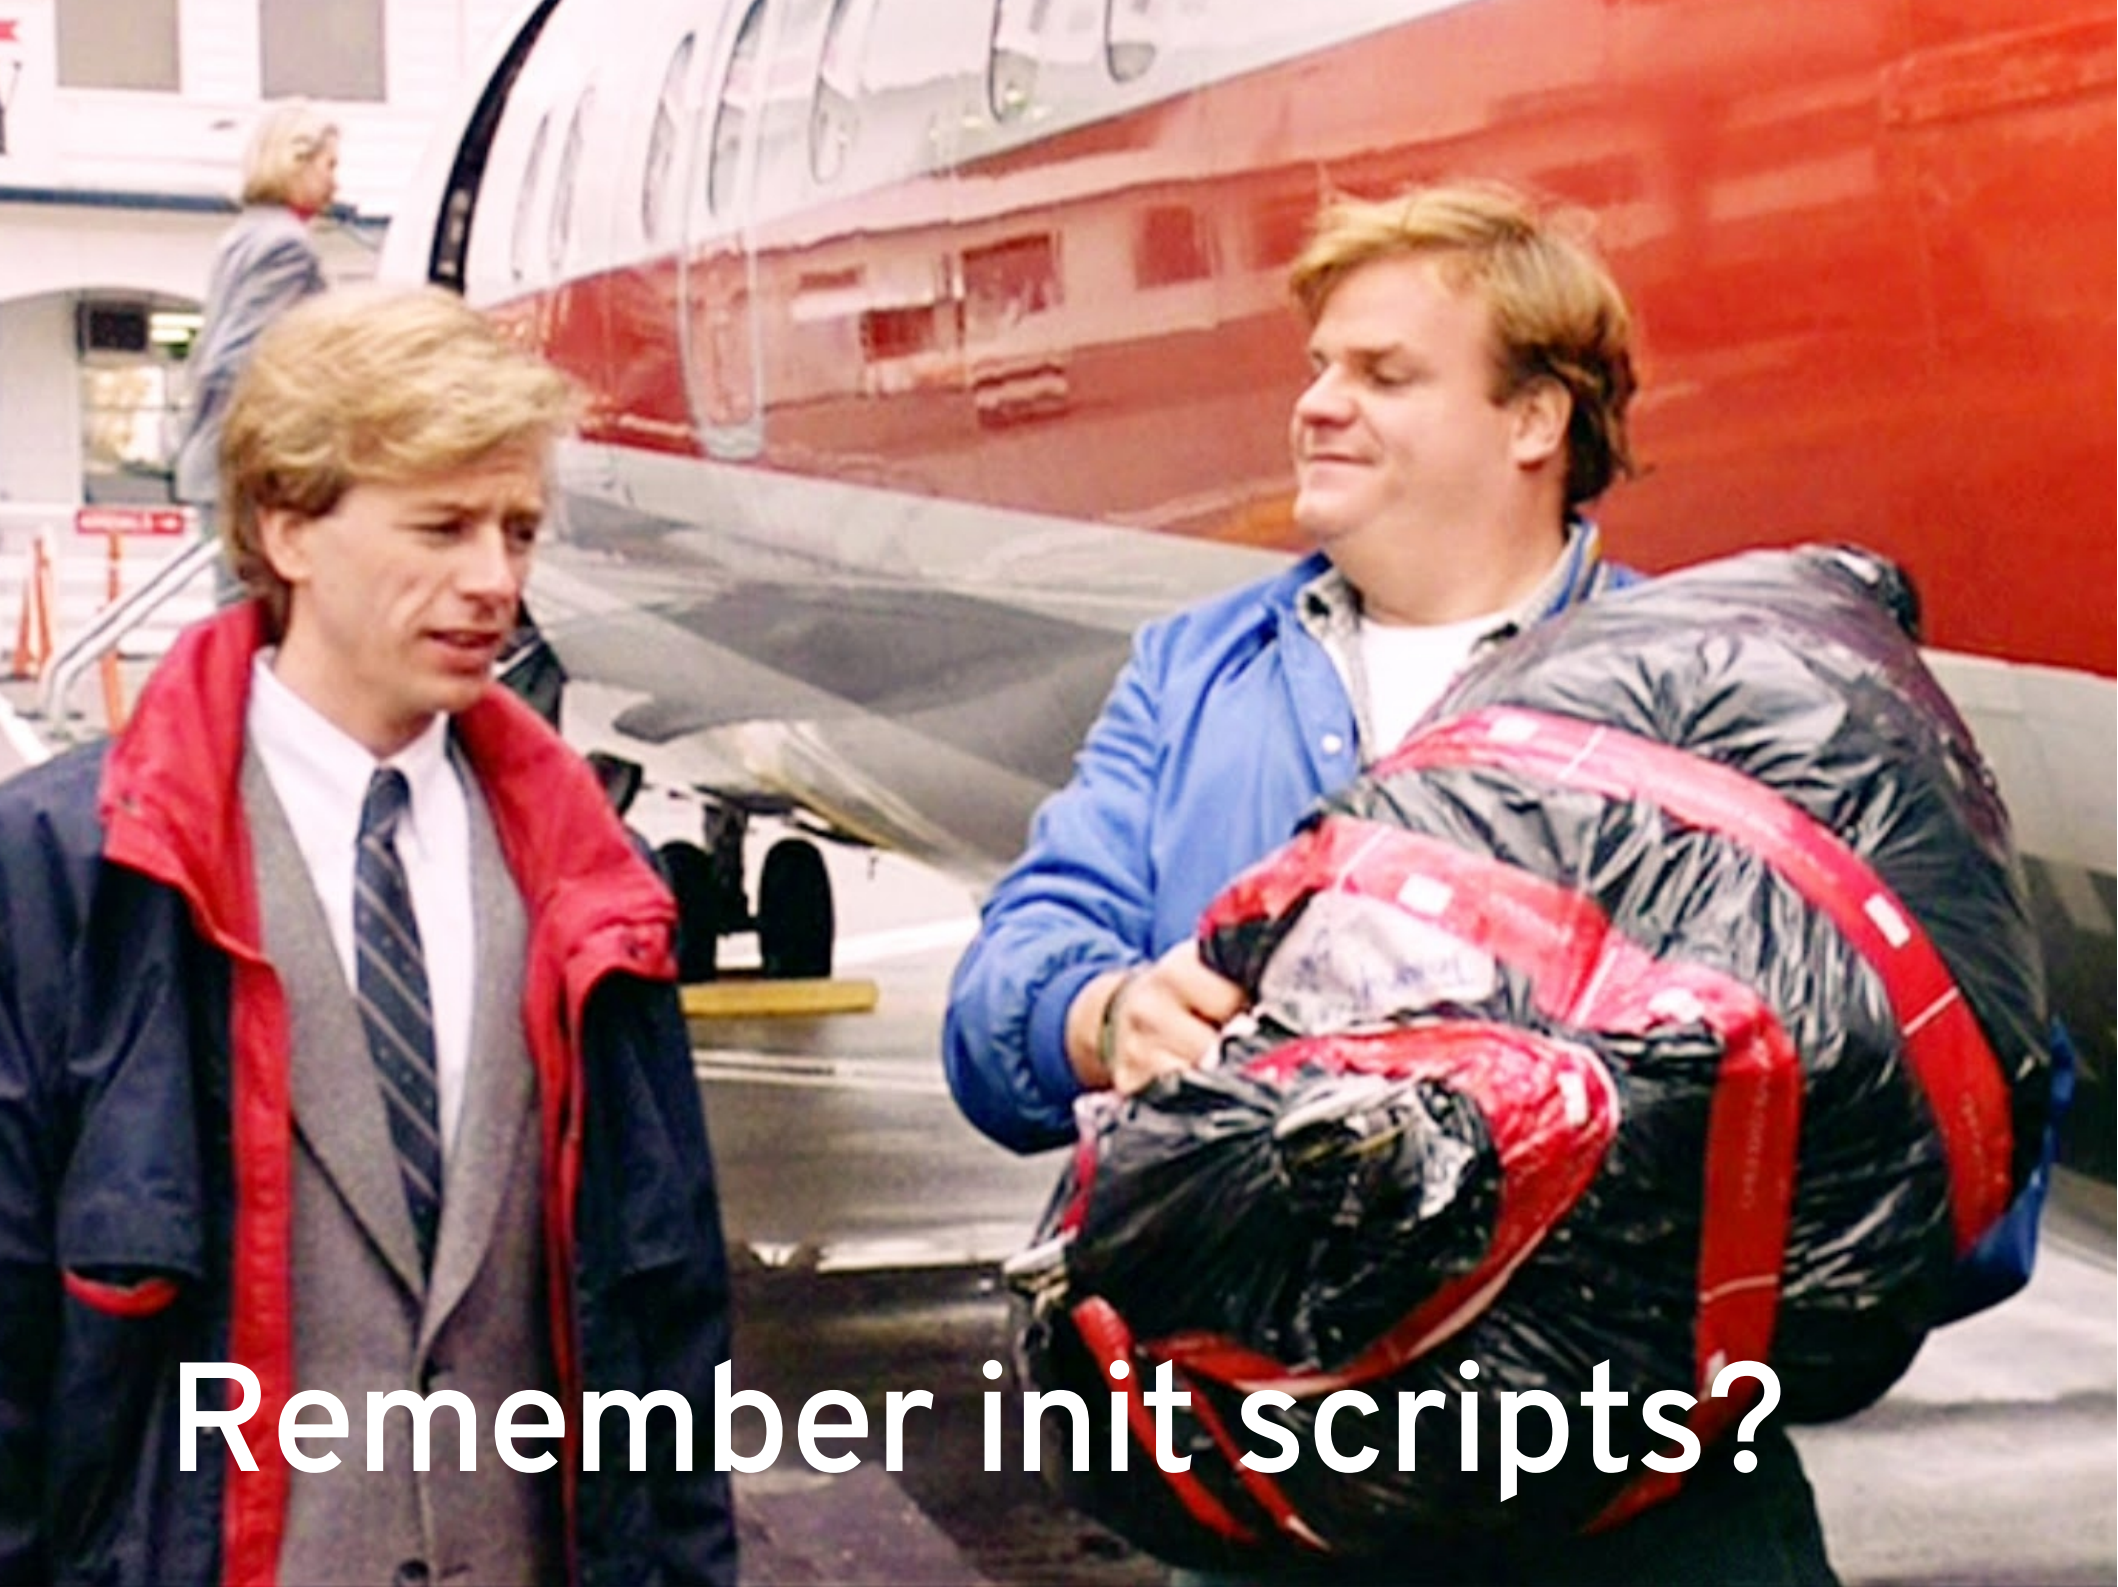

Remember init scripts?

# /etc/init.d/httpd

```
. /etc/rc.d/init.d/functions
if [ -f /etc/sysconfig/httpd ]; then
    . /etc/sysconfig/httpd
fi
HTTPD_LANG=${HTTPD_LANG-"C"}
INITLOG_ARGS=""
apachectl=/usr/sbin/apachectl
httpd=${HTTPD-/usr/sbin/httpd}
prog=httpd
pidfile=${PIDFILE-/var/run/httpd/httpd.pid}
lockfile=${LOCKFILE-/var/lock/subsys/httpd}
RETVAL=0
STOP_TIMEOUT=${STOP_TIMEOUT-10}
start() {
    echo -n "Starting $prog: "
    LANG=$HTTPD_LANG daemon --pidfile=${pidfile} $httpd $OPTIONS
    RETVAL=$?
    echo
    [ $RETVAL = 0 ] && touch ${lockfile}
    return $RETVAL
}
stop() {
    echo -n "Stopping $prog: "
    killproc -p ${pidfile} -d ${STOP_TIMEOUT} $httpd
    RETVAL=$?
    echo
    [ $RETVAL = 0 ] && rm -f ${lockfile} ${pidfile}
}
```

From RHEL 6.4; comments removed

# /etc/init.d/httpd – continued

```
reload() {
    echo -n $"Reloading $prog: "
    if ! LANG=$HTTPD_LANG $httpd $OPTIONS -t >&/dev/null; then
        RETVAL=6
        echo $"not reloading due to configuration syntax error"
        failure $"not reloading $httpd due to configuration syntax error"
    else
        LSB=1 killproc -p ${pidfile} $httpd -HUP
        RETVAL=$?
        if [ $RETVAL -eq 7 ]; then
            failure $"httpd shutdown"
        fi
    fi
    echo
}

case "$1" in
    start)
        start
        ;;
    stop)
        stop
        ;;
    status)
        status -p ${pidfile} $httpd
        RETVAL=$?
        ;;
```

# /etc/init.d/httpd – continued

```
restart)
    stop
    start
;;
condrestart|try-restart)
    if status -p ${pidfile} $httpd >&/dev/null; then
        stop
        start
    fi
;;
force-reload|reload)
    reload
;;
graceful|help|configtest|fullstatus)
    $apachectl $@
    RETVAL=$?
;;
*)
    echo $"Usage: $prog {start|stop|restart|condrestart|try-restart|force-reload|reload|status|fullstatus|graceful|help|configtest}"
    RETVAL=2
esac
exit $RETVAL
```

# httpd.service

## [Unit]

Description=The Apache HTTP Server

After=remote-fs.target nss-lookup.target

## [Service]

Type=notify

EnvironmentFile=/etc/sysconfig/httpd

ExecStart=/usr/sbin/httpd \$OPTIONS -DFOREGROUND

ExecReload=/usr/sbin/httpd \$OPTIONS -k graceful

ExecStop=/usr/sbin/httpd \$OPTIONS -k graceful-stop

PrivateTmp=true

## [Install]

WantedBy=multi-user.target

\*Comments were removed for readability



# To be clear

- Systemd maintains 99% backwards compatibility with LSB compatible initscripts and the exceptions are well documented.
- While we do encourage everyone to convert legacy scripts to service unit files, it's not a requirement.
- Incompatibilities are listed here:  
<http://www.freedesktop.org/wiki/Software/systemd/Incompatibilities/>
- Converting SysV Init Scripts:  
<http://0pointer.de/blog/projects/systemd-for-admins-3.html>

# Unit file layout: Custom App Example

## [Unit]

Description=Describe the daemon

After=network.target

## [Service]

ExecStart=/usr/sbin/[myapp] -D

Type=forking

PIDFile=/var/run/myapp.pid

## [Install]

WantedBy=multi-user.target



# The Journal

# Journal

- Indexed
- Formatted
  - Errors in red
  - Warnings in bold
- Security
- Reliability
- Intelligently rotated

<http://0pointer.de/blog/projects/journalctl.html>

# Journal

- Does not replace rsyslog in RHEL 7
  - rsyslog is enabled by default
- The journal is not persistent by default.
  - Enable persistence: `mkdir /var/log/journal`
- Stored in key-value pairs
  - `journalctl [tab] [tab]`
  - `Man 7 systemd.journal-fields`
- Collects event metadata along with the message
- Simple to filter
  - Interleave units, binaries, etc.

The background is a complex geometric composition. A large, solid red area dominates the center and right. On the left, there are grey and white geometric shapes, including a series of concentric squares or a grid pattern that tapers off towards the top left. Overlaid on the red area are numerous thin, dark lines that form a grid or a series of intersecting planes, creating a sense of depth and architectural structure. The text 'nspawn' is positioned in the lower-left quadrant of the red area.

**nspawn**

# nspawn

- Store containers under `/var/lib/container` to align w/  
`@systemd-nspawn.service`
  - `mkdir /var/lib/container`
- Install a minimal OS w/ `yum`; 306 rpms ~360MB on disk:

```
yum -y --releasever=7Server  
--installroot=/var/lib/container/rhel7 install systemd passwd  
yum redhat-release vim-minimal
```

- Point `nspawn` at the directory and go
  - `systemd-nspawn -D /var/lib/container/rhel7`
- To “boot with an init system”, we need to, start the container,  
set the root password, and configure the system if necessary,  
etc

```
- systemd-nspawn -D /var/lib/container/rhel7
```

```
- passwd ; systemctl disable kdump postfix firewalld  
tuned
```



# systemd-nspawn

- Mini-container manager that is shipped with `systemd` itself
- A container manager that is as simple to use and "just works"
- An integration points with container managers, to allow seamless management of services across container boundaries
- An init system runs inside the container, and the container hence in most ways appears like an independent system of its own





**RHEL 7.2 will likely rebase  
on systemd 219**


# 219 Highlights

- **systemctl** – enhancements edit, cat, etc
- **CPUQuota** – “cap” CPU usage for services
- **systemd-socket-proxy** – add socket activation to daemons that don't support it natively
- **systemd-nspawn**
  - Improved networking
  - Ephemeral & template support
  - “-M [container]” option for systemctl, journalctl, etc
  - Import and run Docker containers & raw cloud images
- **networkd** – DHCP srv/clt, bridge, bond, vlan, vxlan, macvlan, tun

# Additional Resources

- RHEL 7 documentation:  
[https://access.redhat.com/site/documentation/Red\\_Hat\\_Enterprise\\_Linux/](https://access.redhat.com/site/documentation/Red_Hat_Enterprise_Linux/)
- systemd project page:  
<http://www.freedesktop.org/wiki/Software/systemd/>
- Lennart Poettering's systemd blog entries: (read them all)  
<http://0pointer.de/blog/projects/systemd-for-admins-1.html>
- Red Hat System Administration II & III (RH134/RH254)  
<http://redhat.com/training/>
- [systemd FAQ](#)
- [Tips & Tricks](#)



A close-up shot of a man with light brown, wavy hair, wearing a brown and tan plaid jacket over a light-colored shirt. He is holding a small, light-colored potato in his left hand and pointing at it with his right index finger. He has a wide, joyful smile, showing his teeth. The background is blurred, showing other people and what appears to be an outdoor event or festival.

Ohh my pretty  
little systemd,  
I love you!



# THANK YOU!

Scott Seighman  
Solutions Architect  
Red Hat

 [sseighma@redhat.com](mailto:sseighma@redhat.com)

 [ClRHUG](#)



[plus.google.com/+RedHat](https://plus.google.com/+RedHat)



[facebook.com/redhatinc](https://facebook.com/redhatinc)



[linkedin.com/company/red-hat](https://linkedin.com/company/red-hat)



[twitter.com/RedHatNews](https://twitter.com/RedHatNews)



[youtube.com/user/RedHatVideos](https://youtube.com/user/RedHatVideos)

# Tips & Troubleshooting

- Early boot shell on tty9
  - `systemctl enable debug-shell.service`
  - `ln -s /usr/lib/systemd/system/debug-shell.service \`  
`/etc/systemd/system/sysinit.target.wants/`
- `systemctl list-jobs`
- Interactive boot append: `systemd.confirm_spawn=1`
- Enable debugging append:
  - `debug`
  - `debug systemd.log_target=kmsg log_buf_len=1M`
  - `debug systemd.log_target=console`  
`console=ttyS0`

# Tips & Troubleshooting

- `rc.local` is supported, but no longer runs last
  - `chmod +x /etc/rc.d/rc.local`
- `systemd-analyze`
  - Use 'blame', 'plot', or 'critical-chain' for more details
- Append `systemd.unit=[target]` to the kernel
  - Rescue mode: single, s, S, or 1
  - Emergency (similar to `init=/bin/bash`): -b or emergency