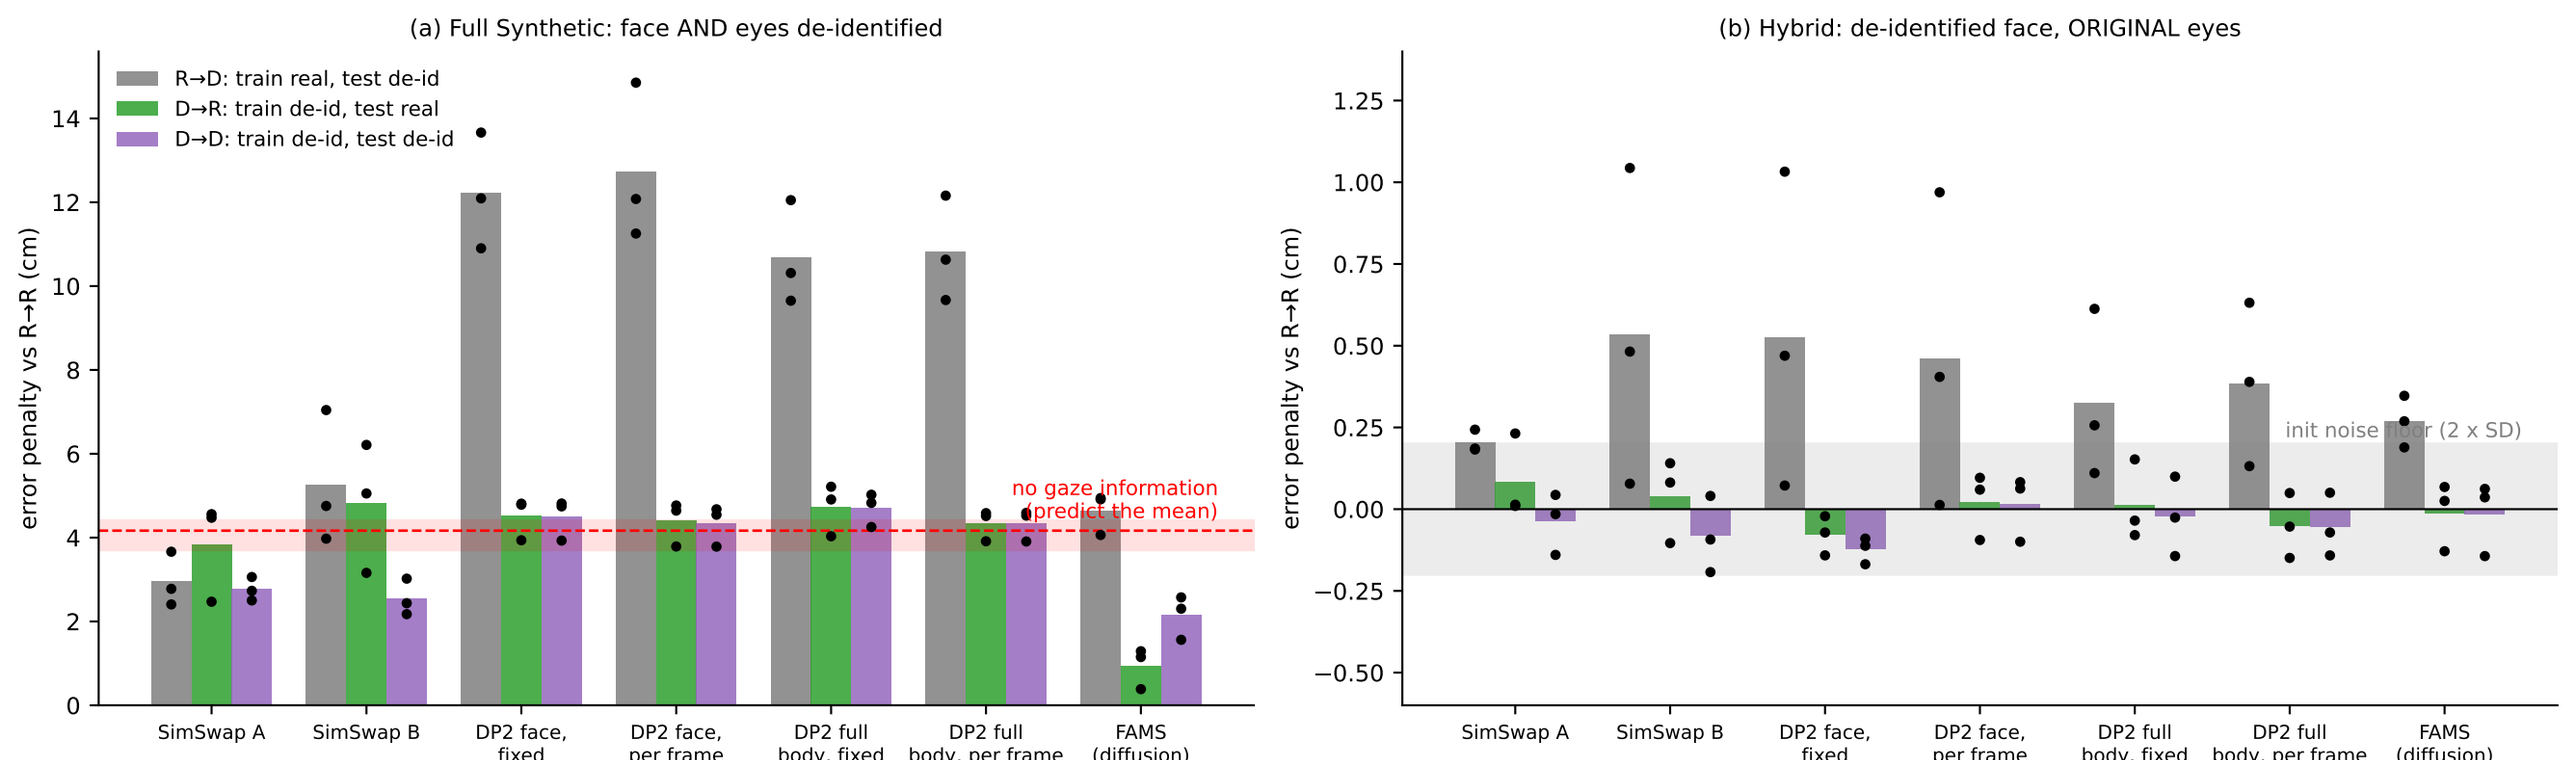
(a) Full Synthetic: face AND eyes de-identified
(b) Hybrid: de-identified face, ORIGINAL eyes
R→D: train real, test de-id
D→R: train de-id, test real
D→D: train de-id, test de-id
error penalty vs R→R (cm)
no gaze information
(predict the mean)
init noise floor (2 x SD)
SimSwap A
SimSwap B
DP2 face, fixed
DP2 face, per frame
DP2 full body, fixed
DP2 full body, per frame
FAMS (diffusion)
bars: mean of MobileNet-V3, AFFNet, MGazeNet; dots: each backbone. R→D uses 5 initialisation draws, D→R and D→D 5 initialisation draws.