PRACTICAL LAB: JAVASCRIPT OPERATORS MASTERY

Course: DFK20013 Web Design Technology

Topic: 3.1.1 Variables, Data Types, and Operators

Duration: 60 – 90 Minutes

Student Name	**NUR SYAFIQA ALYA BINTI MOHAMAD ROHIZAM**
Registration No	**10DIT25F1168**
Date	**3/3/2026**

---

1. Learning Outcomes

By the end of this lab, students should be able to:

- Implement **Arithmetic Operators** for calculations.
- Use **Assignment Operators** to update values efficiently.
- Control application states using **Increment/Decrement**.
- Validate user access using **Relational** and **Logical** operators.

---

2. Practical Task: The All-in-One Operator Workshop

Create a file named lab_operators.html. Copy and complete the coding below. **HTML**

```
<!DOCTYPE html>

<html lang="en">

<head>

    <meta charset="UTF-8">

    <title>DFK20013: JS Operators Workshop</title>

    <style>

        body { font-family: 'Segoe UI', sans-serif; max-width: 850px;
margin: 2rem auto; background-color: #f0f2f5; padding: 20px; color: #333;
}

        section { background: white; padding: 25px; border-radius: 12px;
margin-bottom: 25px; box-shadow: 0 4px 6px rgba(0,0,0,0.1); }

        h2 { color: #2c3e50; border-left: 5px solid #3498db; paddingleft:
10px; margin-top: 0; }

        .output-box { background: #2c3e50; color: #27ae60; padding: 15px;
border-radius: 6px; font-family: 'Courier New', monospace; margin-top:
10px; }
```

```
        .short-note { background: #fff3cd; color: #856404; padding: 15px;
border-radius: 6px; margin-top: 15px; border-left: 5px solid #ffc107;
display: none; font-size: 0.9rem; }

        input { padding: 8px; width: 100px; border-radius: 4px; border:
1px solid #ccc; }

        button { padding: 8px 20px; background: #3498db; color: white;
border: none; border-radius: 4px; cursor: pointer; font-weight: bold; }
button:hover { background: #2980b9; }

        code { background: #eee; padding: 2px 4px; border-radius: 3px;
font-weight: bold; color: #d63384; }

    </style>

</head>
```

```
<body>



    <header style="text-align: center; margin-bottom: 30px;">

        <h1>JavaScript Operators Mastery</h1>

        <p>Follow the steps and observe the Console and UI outputs.</p>

    </header>
```

```
    <section>

        <h2>Task 1: Basic Arithmetic (Check Console)</h2>

        <p>This task demonstrates background calculations using
<code>+</code>, <code>-</code>, <code>*</code>, <code>/</code>,
<code>**</code>, and <code>%</code>.</p>

        <button onclick="runTask1()">Run Console Logic</button>

    </section>
```

```
    <section>

        <h2>Task 2: POS System (Arithmetic & Assignment)</h2>

        <p>Price: RM 50.00. <strong>Promo:</strong> Buy > 4 units to get
RM 20.00 discount.</p>

        Quantity: <input type="number" id="qty" value="1">

        <button onclick="runTask2()">Calculate Total</button>

        <div id="outPOS" class="output-box">Final Total: RM 0.00</div>

        <div id="notePOS" class="short-note"></div>

    </section>
```

```
    <section>

        <h2>Task 3: Stock Control (Increment & Decrement)</h2>
```

```
        <p>Simulating inventory updates.</p>

        Stock Level: <span id="stockVal" style="font-size: 1.5rem;
fontweight: bold;">10</span><br><br>

        <button onclick="runTask3('inc')">Add (+)</button>

        <button onclick="runTask3('dec')"
style="background:#6c757d;">Remove (-)</button>

        <div id="noteStock" class="short-note"></div>

    </section>
```

```
    <section>

        <h2>Task 4: Gate Access (Relational & Logical)</h2>

        <p>Rules: Age 18+ OR (Age 13+ AND Parent present).</p>

        Age: <input type="number" id="age" placeholder="Age">

        <label><input type="checkbox" id="parent"> With
Parent?</label><br><br>

        <button  onclick="runTask4()"  style="background:#27ae60;">Verify
Entry</button>

        <div id="outSecurity" class="output-box">Status: Waiting...</div>

        <div id="noteSecurity" class="short-note"></div>

    </section>
```

Inside the <script> tag, type all the following code:

JAVASCRIPT:

1.

```
<script>
    // Helper to show explanations
    function showNote(id, text) {
        const noteDiv = document.getElementById(id);
        noteDiv.style.display = 'block';
        noteDiv.innerHTML = text;
    }
```

2.

```
// --- TASK 1: ARITHMETIC (BASIC) ---
function runTask1() {
    console.log("--- Task 1: Arithmetic Operations ---");
    let students = 31;
    students = students + 1;   // Addition
    students = students - 2;   // Subtraction
    students = students * 2;   // Multiplication
    students = students / 2;   // Division
    let power = 10 ** 2;       // Exponentiation (100)
    let remainder = 31 % 2;    // Modulus (1 - Odd)

    console.log("Final Student Count: " + students);
    console.log("10 to the power of 2: " + power);
    console.log("Remainder of 31/2: " + remainder);
    alert("Check Browser Console (F12) for results!");
}
```

3.

```
// --- TASK 2: POS SYSTEM (ARITHMETIC & ASSIGNMENT) ---
function runTask2() {
    let price = 50;
    let qty = parseInt(document.getElementById('qty').value);

    // a. Arithmetic Operator (*)
    let total = price * qty;
    let note = "<b>Subtopic (a) Arithmetic:</b> <code>*</
    code> multiplied " + price + " by " + qty + ".<br>";

    // b. Assignment Operator (-=)
    if (qty > 4) {
        total -= 20; // Shorthand for total = total - 20
        note += "<b>Subtopic (b) Assignment:</b> <code>-=</
        code> updated the total by subtracting the discount.";
    }

    document.getElementById('outPOS').textContent = "Final
    Total: RM " + total.toFixed(2);
    showNote('notePOS', note);
}
```

4.

```
// --- TASK 3: INCREMENT & DECREMENT ---
let stock = 10;
function runTask3(type) {
    let note = "";
    if (type === 'inc') {
        stock++; // (c) Increment
        note = "<b>Subtopic (c) Increment:</b> <code>++</
        code> increased the stock by 1.";
    } else {
        stock--; // (c) Decrement
        note = "<b>Subtopic (c) Decrement:</b> <code>--</
        code> decreased the stock by 1.";
    }
    document.getElementById('stockVal').textContent = stock;
    showNote('noteStock', note);
}
```

5.

```
    // --- TASK 4: RELATIONAL & LOGICAL ---
    function runTask4() {
        let age = parseInt(document.getElementById('age').value);
        let hasParent = document.getElementById('parent').checked;
        let status = document.getElementById('outSecurity');

        if (isNaN(age)) return alert("Please enter a valid age.");

        // d. Relational: >=
        // e. Logical: || (OR), && (AND)
        let isEligible = (age >= 18) || (age >= 13 && hasParent);

        status.textContent = isEligible ? "Status: ACCESS GRANTED
        ✅" : "Status: ACCESS DENIED ❌";
        status.style.color = isEligible ? "#27ae60" : "#ff4d4d";

        let note = "<b>Subtopic (d) Relational:</b> <code>>=</
        code> compared Age (" + age + ") to the limit.<br>";
        note += "<b>Subtopic (e) Logical:</b> Used <code>||</
        code> (OR) and <code>&&</code> (AND) to combine rules.";
        showNote('noteSecurity', note);
    }
</script>
```

Capture a screenshot of the output from the previous steps. **Observe** the results and **explain** your understanding of the process.

1.	**Screenshot of the output** Live reload enabled. index.html:230 ---Task 1: Arithmetic Operations --- index.html:135 Final Student Count: 30 index.html:144 10 to the power of 2: 100 index.html:145 Remainder of 31/2: 1 index.html:146
	Explanation The output shows that the program successfully performs basic arithmetic operations. The final student count is 30, proving that addition or value updates work correctly. The calculation of 10^2 gives 100, showing the exponent operator works. The remainder of 31 divided by 2 is 1, which demonstrates the modulus operator. Overall, the arithmetic operations function properly.

2.	**Screenshot of the output** **Task 2: POS System (Arithmetic & Assignment)** Price: RM 50.00. **Promo:** Buy > 4 units to get RM 20.00 discount. Quantity: 3 Calculate Total Final Total: RM 150.00 **Subtopic (a) Arithmetic:** * multiplied 50 by 3.
	Explanation This task shows a simple POS system calculation. The item price is RM 50.00, and the quantity entered is 3. The system multiplies 50 by 3 to get RM 150.00. Since the quantity is less than 4, no discount is applied. This proves that the arithmetic calculation and conditional logic are working correctly.

3.	**Screenshot of the output**

Explanation

This task shows how increment and decrement operators work. The stock level starts at 10. When the add button is clicked, the stock increases by 1 using the increment (++) operator. When the remove button is clicked, the stock decreases by 1 using the decrement (–) operator. This shows that the program can update values correctly using increment and decrement operations.

4. **Screenshot of the output**

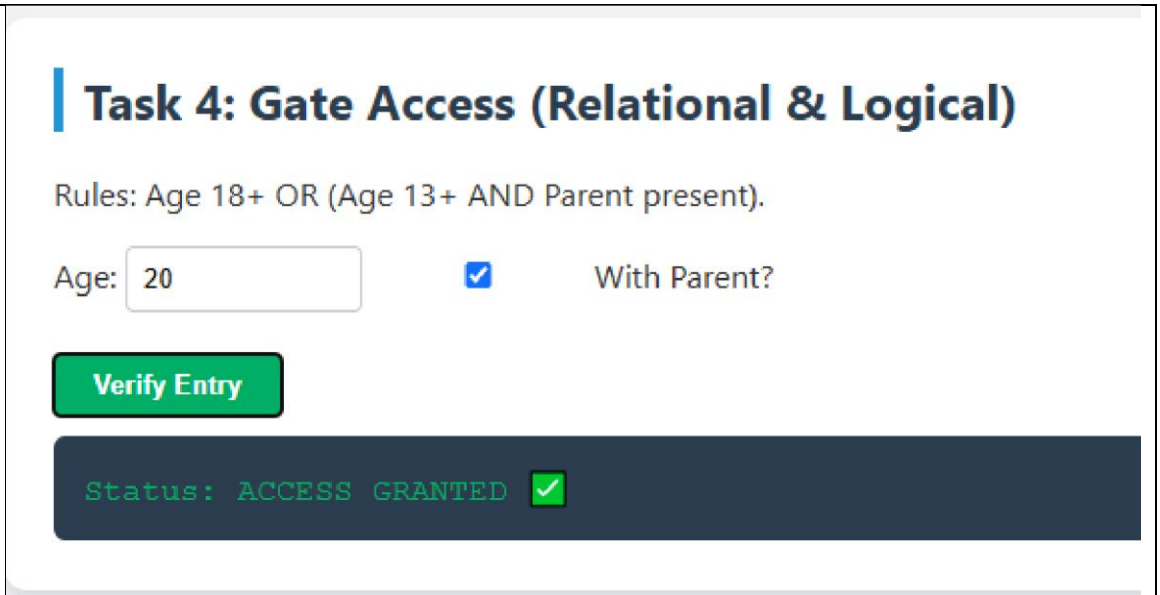

Explanation

This task uses relational and logical operators to check access rules. The rule is: Age 18 and above can enter, or age 13 and above if accompanied by a parent. The system checks the age input and whether the “With Parent” option is selected. It then decides if access is allowed based on these conditions. This shows that relational (>, ≥) and logical (AND, OR) operators are working correctly.

3. Quick Check (Reflection)

Instruction: Answer the following questions based on your coding results.

1. **Modulus Utility:** Based on Task 1, if students % 2 returns 0, is the number even or odd?

   -If student % 2 return 0, the number is even because it can be divided by 2 without any remainder.

2.Shorthand Power: In Task 2, rewrite total -= 20 using the standard assignment method.

The standard assignment form of total -= 20 is : total= total-20

3.Logical Priority: In Task 4, why did we put (age >= 13 && hasParent) in parentheses?

We put (age>=13&&has parentheses to make sure this condition is checked together first before combining it with other conditions. This makes the logic clear and correct.

4.Time Calculation: (Extra Challenge) If a variable totalMinutes = 130, write the formula to find the remaining minutes after converting to hours using the **Modulus** operator.

To find the remaining minutes after converting to hours, use: totalMinutes% 60