
Landing App Map

How the files in `apps/landing/` pass a request along, and how data gets into the tables they read.


a call or command · data moving · outside `apps/landing/`

A request: GET /api/landing/

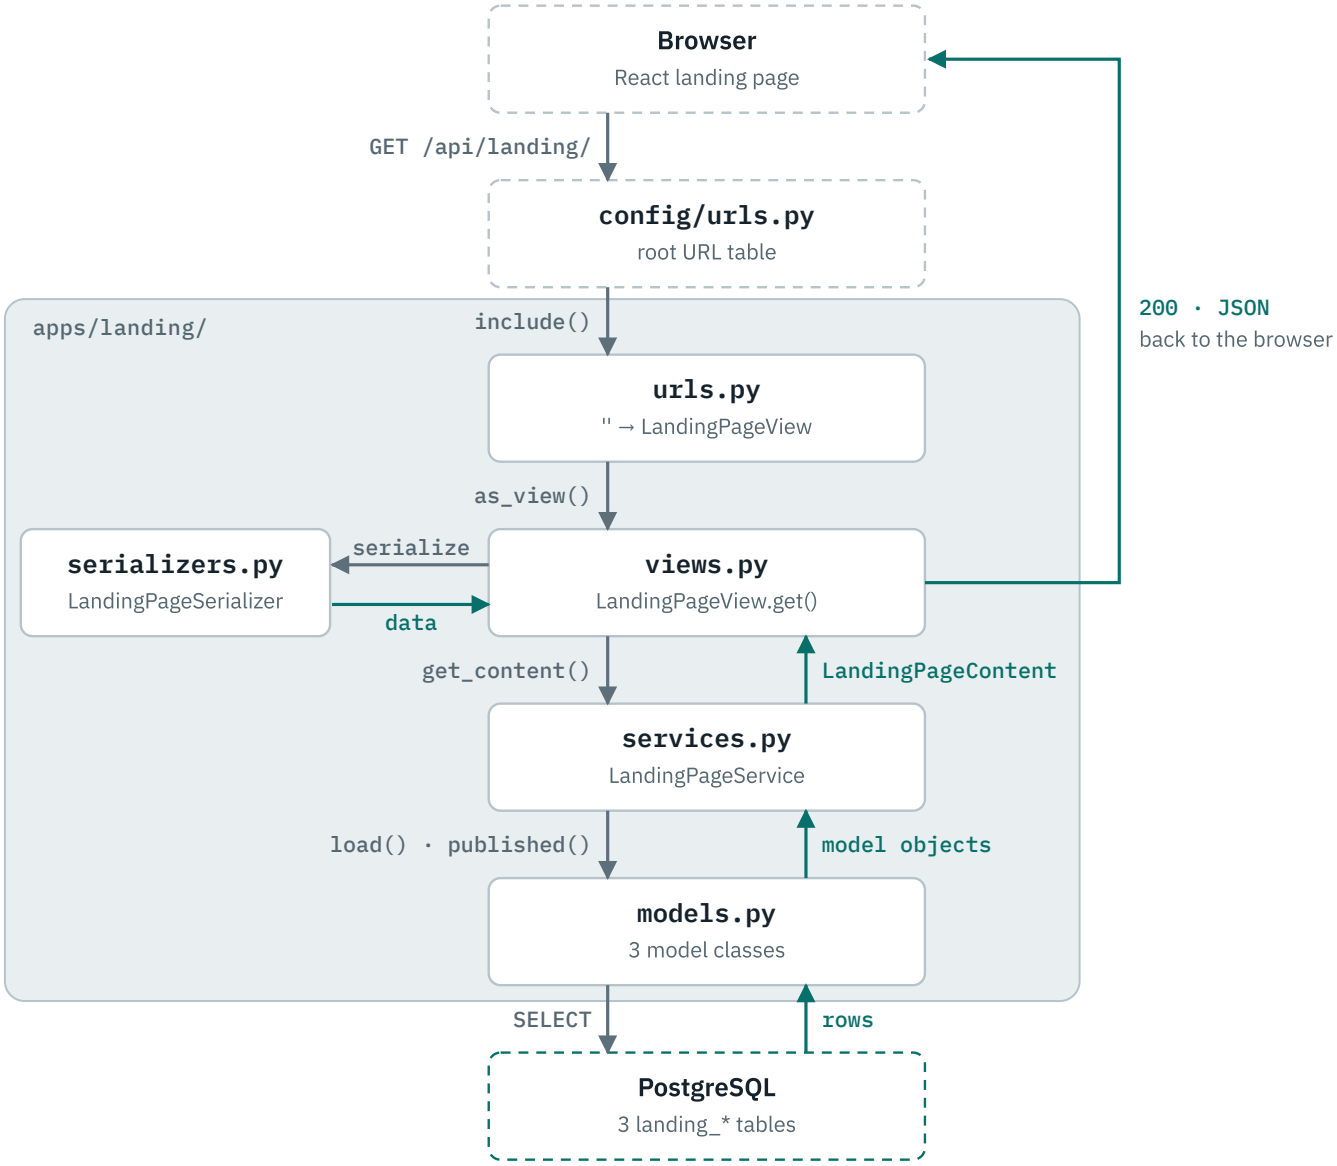

Each file hands the request to the next one down, and `models.py` reads the tables. The answer climbs back to `views.py`, which has the serializer turn it into JSON. The reply goes straight to the browser, so it skips the two URL files.

Getting data into the tables

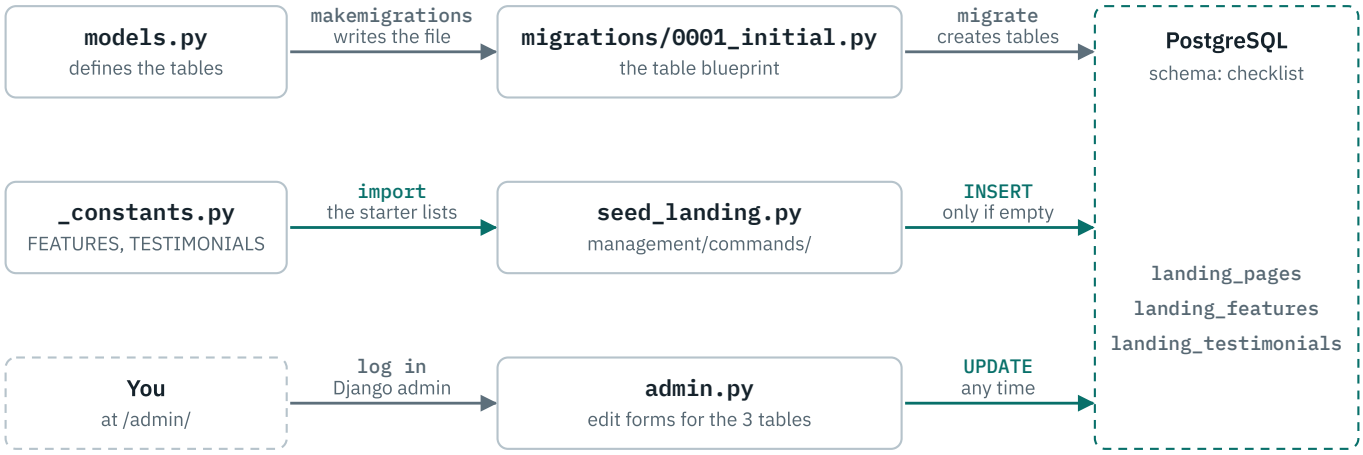

`migrate` builds the tables and `seed_landing` fills them, so run them in that order. After that the admin edits the same rows, and a re-run of the seed leaves any table that already has rows alone.

In neither flow

`apps.py`
Registers the app with Django through `INSTALLED_APPS`, which is how it finds the models, admin and migrations.

`tests/`
Runs against a throwaway test database that is created and destroyed each run, so it never touches your data.

`__init__.py`
Marks the folder as a Python package. It is empty on purpose.