

部署文档

1. 解压 yii-advanced-app-2.0.43.tgz 至 xampp/htdocs 下

此电脑 > Data (D:) > Studyandwork > XAMPP > xampp > htdocs >					在 htdocs 中搜索
名称	修改日期	类型	大小		
AdminPro	2023/2/8 9:01	文件夹			
advanced	2023/2/9 12:19	文件夹			

2. shift+右键，选择 powershell，输入命令 ./init.bat。输入 0 选择 development 版本回车，输入 yes 安装

```
Windows PowerShell
PS D:\xampp\htdocs\advanced> .\init.bat
yii Application Initialization Tool v1.0

Which environment do you want the application to be initialized in?

[0] Development
[1] Production

Your choice [0-1, or "q" to quit] 0


Initialize the application under 'Development' environment? [yes|no] yes

Start initialization ...

generate backend/config/codeception-local.php
generate backend/config/main-local.php
generate backend/config/params-local.php
generate backend/config/test-local.php
generate backend/web/index-test.php
generate backend/web/index.php
generate backend/web/robots.txt
generate common/config/codeception-local.php
generate common/config/main-local.php
generate common/config/params-local.php
generate common/config/test-local.php
generate console/config/main-local.php
generate console/config/params-local.php
generate console/config/test-local.php
generate frontend/config/codeception-local.php
generate frontend/config/main-local.php
generate frontend/config/params-local.php
generate frontend/config/test-local.php
generate frontend/web/index-test.php
generate frontend/web/index.php
generate frontend/web/robots.txt
generate yii
generate yii_test
generate yii_test.bat
generate cookie validation key in backend/config/main-local.php
generate cookie validation key in common/config/codeception-local.php
generate cookie validation key in frontend/config/main-local.php
chmod 0777 backend/runtime
chmod 0777 backend/web/assets
chmod 0777 console/runtime
chmod 0777 frontend/runtime
chmod 0777 frontend/web/assets
chmod 0755 yii
chmod 0755 yii_test

... initialization completed.
```

3. 使用 phpMyAdmin 创建 yii2advanced 数据库，运行 install.sql 文件，生成全部的数据库表
4. 进行数据库的配置，打开 /common/config/main-local.php，填入数据库账号密码。

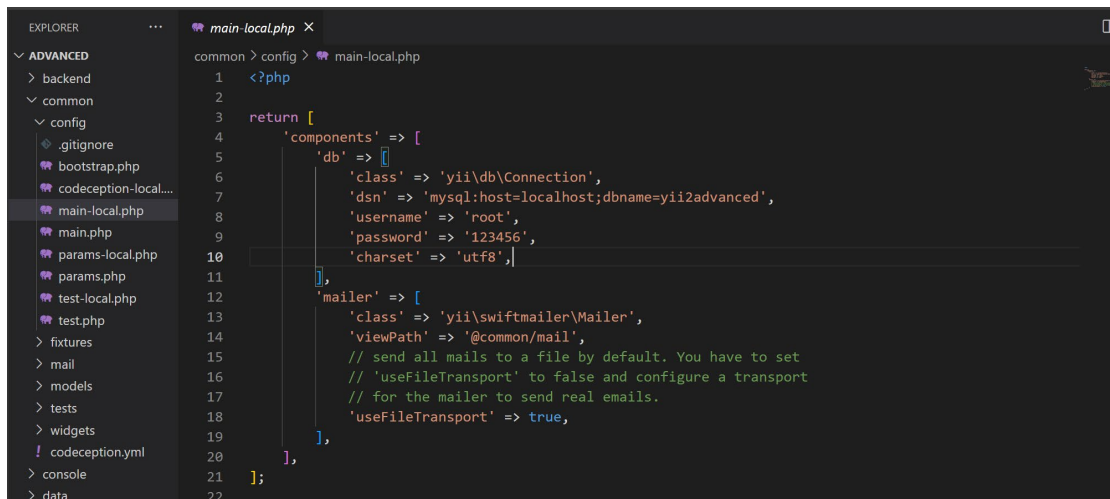

```
1 <?php
2
3 return [
4     'components' => [
5         'db' => [
6             'class' => 'yii\db\Connection',
7             'dsn' => 'mysql:host=localhost;dbname=yii2advanced',
8             'username' => 'root',
9             'password' => '123456',
10            'charset' => 'utf8',
11        ],
12        'mailer' => [
13            'class' => 'yii\swiftmailer\Mailer',
14            'viewPath' => '@common/mail',
15            // send all mails to a file by default. You have to set
16            // 'useFileTransport' to false and configure a transport
17            // for the mailer to send real emails.
18            'useFileTransport' => true,
19        ],
20    ],
21 ];
22
```

5. 启动 xampp 的 apache 和 mysql
6. 浏览前端网址: <http://localhost:8090/advanced/frontend/web/>