


词条

Neurosymbolic Programming 神经符号编程：

Neural-Symbolic Concept Learning 神经符号概念学习：


Supapixel Sampling Network 超像素采样网络：超像素是通过基于低级图像属性对图像像素进行分组而形成的图像的过分割。它们提供了图像内容感知上有意义的细分，从而减少了后续图像处理的图像基元的数量。由于它们的代表性和计算效率，超像素已经成为一种既定的低/中级图像表示。

- Auxiliary Classifier (辅助分类器)

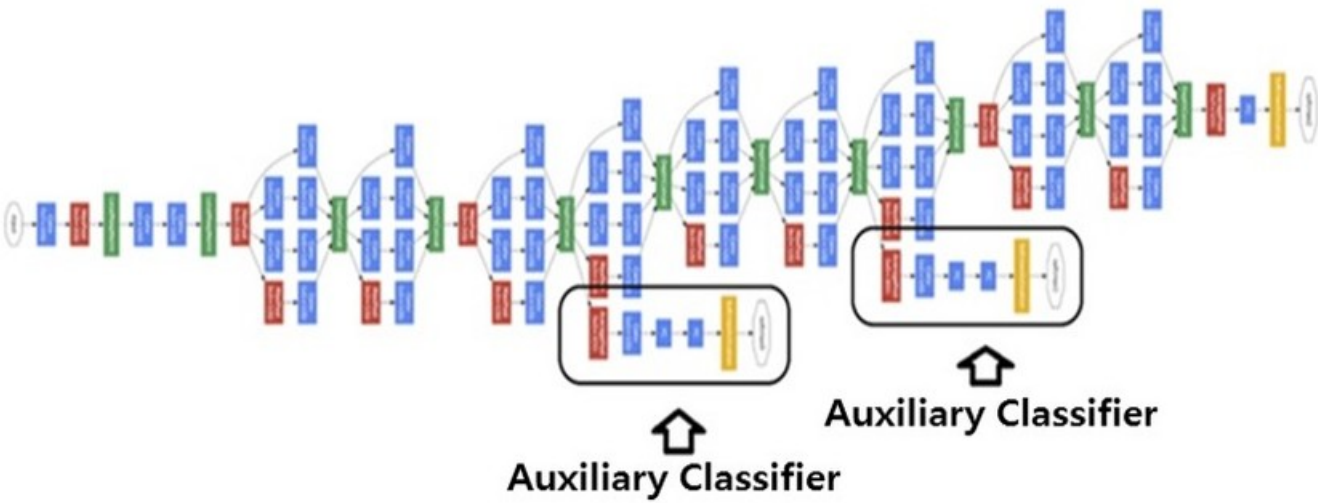

在网络结束之前附加到层的分类器头。动机是将有用的梯度推向下层，以使其立即有用，并通过解决消失的梯度问题来改善训练过程中的收敛性。

- Neural Additive Model (神经加性模型)

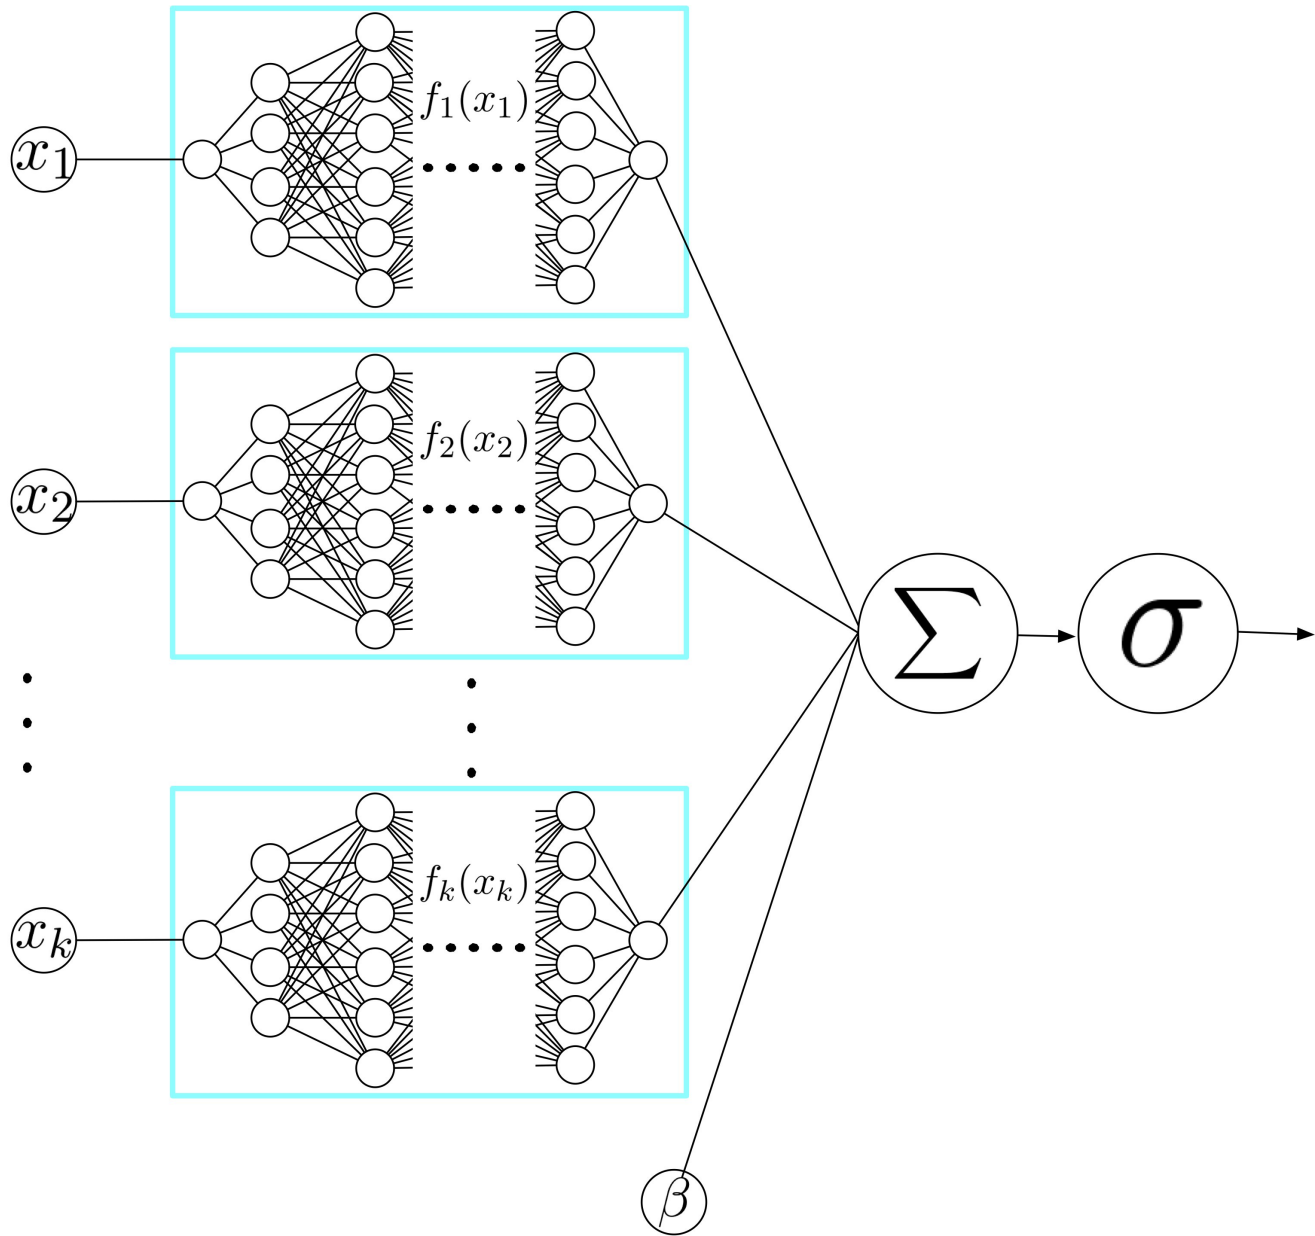

• Hierarchical Network Dissection ()

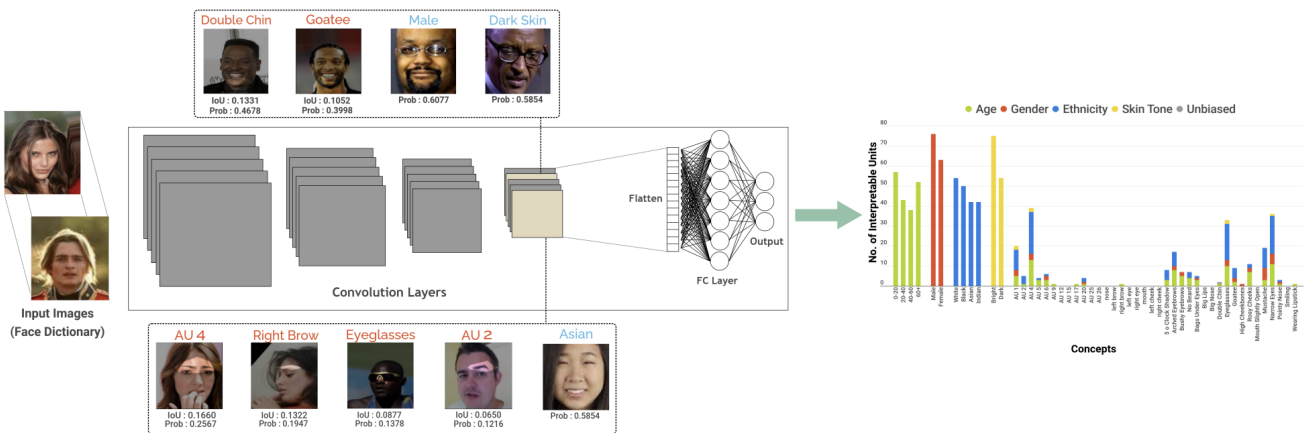


Fig. 1 Overview of Hierarchical Network Dissection for CNNs. Interpretable units are discovered in a convolution layer through our formulation to identify multiple instances of unit-concept affinity. The two boxes display samples of interpretable concepts identified for the respective units where local concepts (Red) have an IoU score and a probability, whereas global concepts (Blue) only have a probability score. Finally a dissection report is generated that displays a histogram of all concepts discovered.

- **Child-Tuning** (子网络微调)

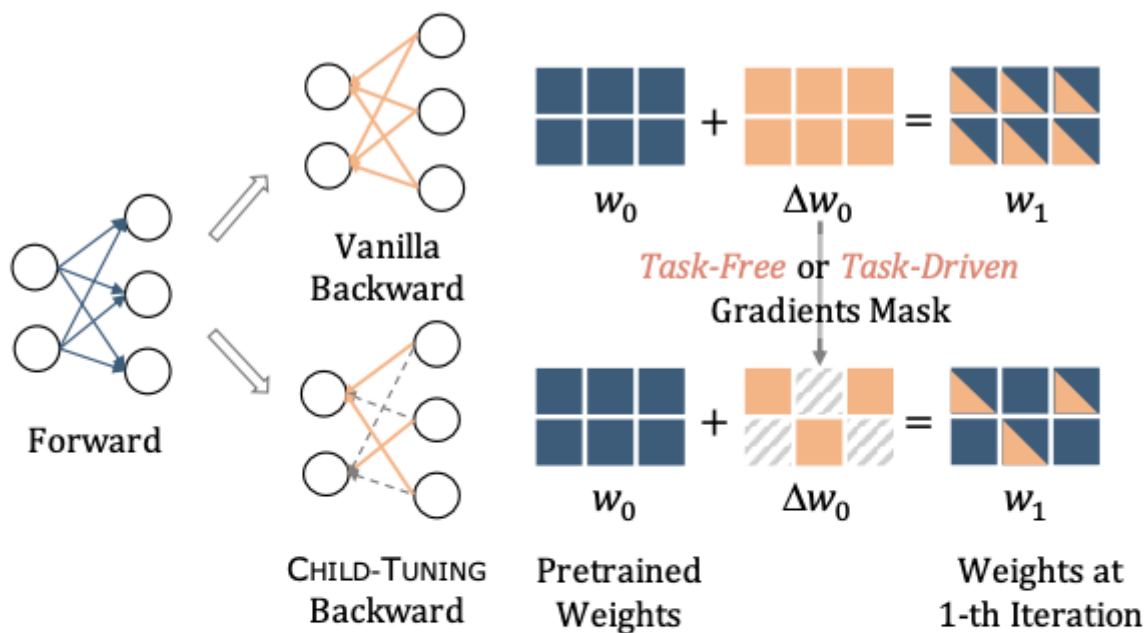


Figure 1: The illustration of CHILD-TUNING. Left: It forwards on the whole network while backwarding on a subset of network (i.e., child network). Right: To achieve this, a task-free or task-driven mask is performed on the gradients of the non-child network, resetting them to zero (grey diagonal grids).

知识库

- [Everything about Transfer Learning. 迁移学习](#)

参考

- [AI的未来? ——Neurosymbolic Programming, 神经符号编程, 神经网络结合符号AI](#)
- [神经流形与表征几何理论](#)
- [【深度聚类】 Superpixel Sampling Networks](#)