




A terminal window with a dark background and light text. The title bar at the top shows 'syed123@localhost:~' and includes search, menu, and close icons. Below the title bar, there are two tabs, both labeled 'syed123@localhost:~'. The first tab is active and highlighted with a blue underline. The terminal content shows a series of commands and their outputs: creating 'sender.c' and 'receiver.c' with 'nano', compiling them with 'gcc', and running './sender', which outputs 'Message Sent!'.

```
[syed123@localhost ~]$ nano sender.c
[syed123@localhost ~]$ nano receiver.c
[syed123@localhost ~]$ gcc sender.c -o sender
gcc receiver.c -o receiver
[syed123@localhost ~]$ ./sender
Message Sent!
[syed123@localhost ~]$
```

syed123@localhost:~ — nano sender.c

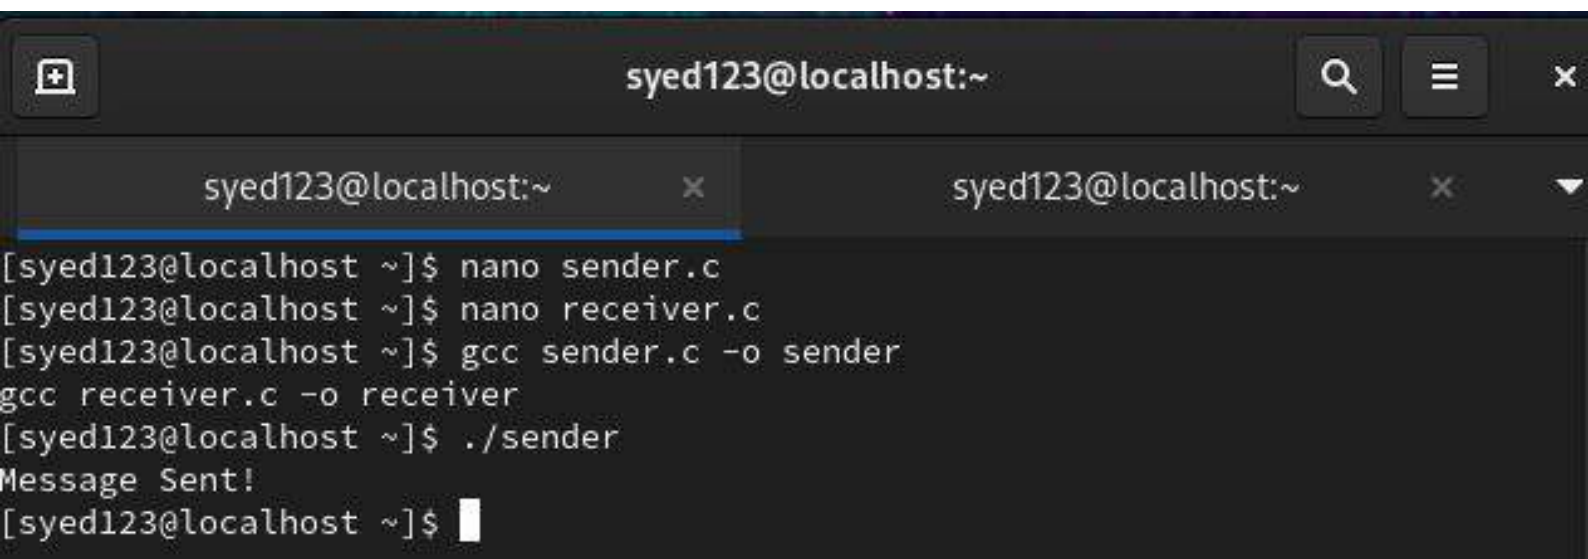

syed123@localhost:~ — nano sen... x

syed123@localhost:~ x

GNU nano 5.6.1

sender.c

```
#include <stdio.h>
#include <sys/ipc.h>
#include <sys/shm.h>
#include <unistd.h>

int main() {
    int shmid;
    char *str;

    // Create shared memory
    shmid = shmget((key_t)1234, 1024, 0666 | IPC_CREAT);

    // Attach shared memory
    str = (char*) shmat(shmid, NULL, 0);

    // Write message
    sprintf(str, "Welcome to Shared Memory");

    printf("Message Sent!\n");
}
```

syed123@localhost:~ — nano receiver.c

syed123@localhost:~ — nano rec... x syed123@localhost:~ x

GNU nano 5.6.1 receiver.c

```
#include <stdio.h>
#include <sys/ipc.h>
#include <sys/shm.h>


int main() {
    int shmid;
    char *str;

    // Access shared memory
    shmid = shmget((key_t)1234, 1024, 0666);

    // Attach
    str = (char*) shmat(shmid, NULL, 0);

    // Read message
    printf("Message Received: %s\n", str);

    // Detach
    shmdt(str);
}
```

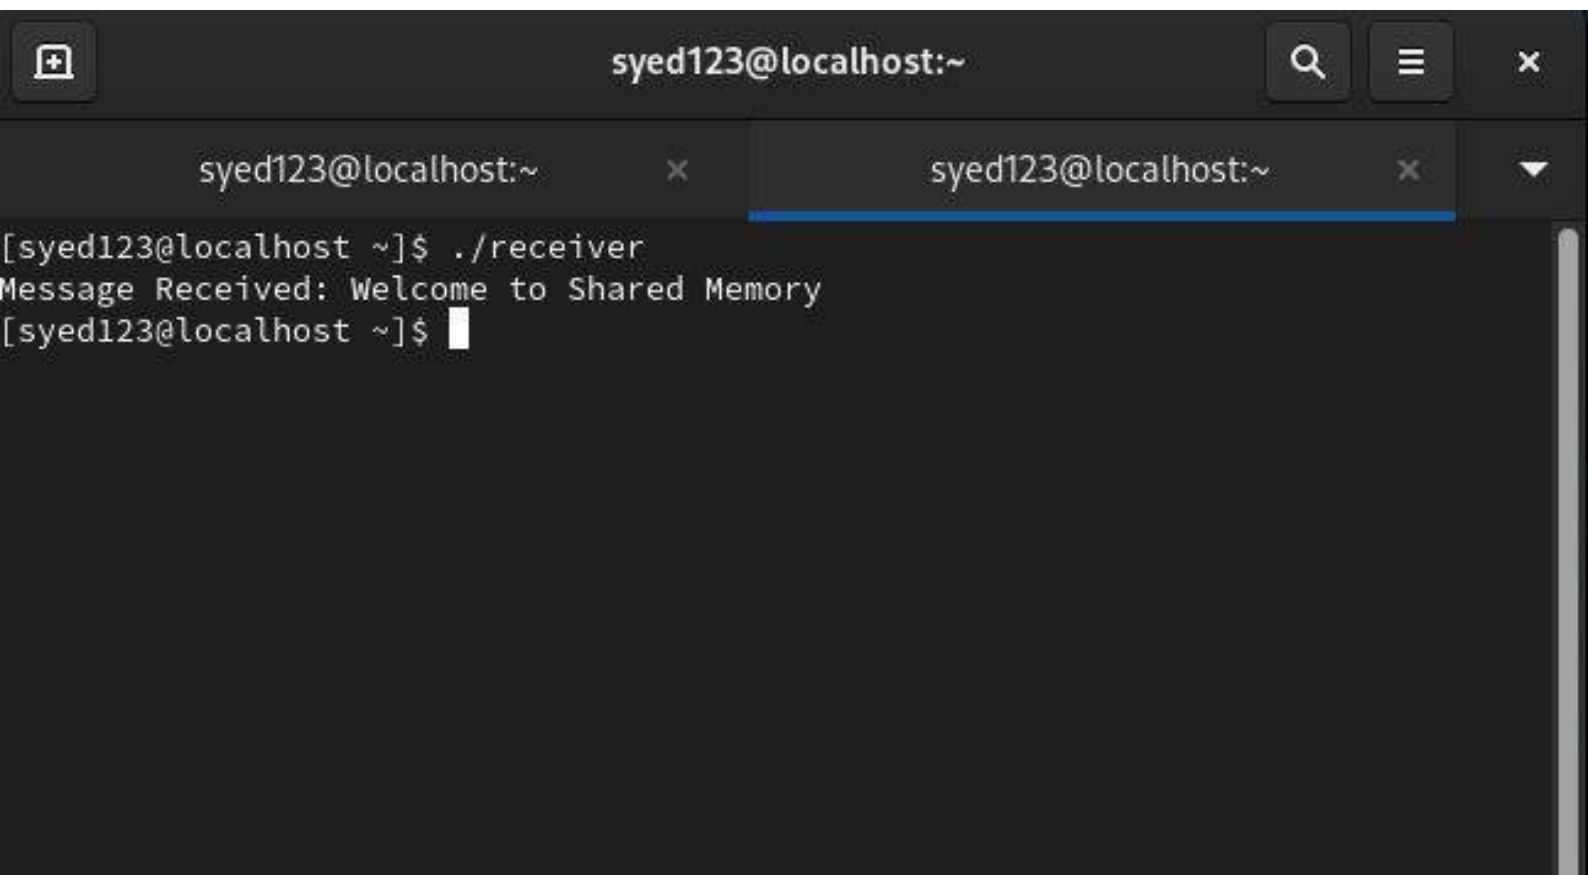

The image shows a terminal window with a dark background. The title bar at the top contains a window management icon on the left, the text "syed123@localhost:~" in the center, and search, menu, and close icons on the right. Below the title bar, there are two tabs, both labeled "syed123@localhost:~". The second tab is selected and highlighted with a blue underline. The terminal content shows a command prompt "[syed123@localhost ~]\$./receiver" followed by the output "Message Received: Welcome to Shared Memory". A new command prompt "[syed123@localhost ~]\$ " is shown on the next line with a white cursor.

```
[syed123@localhost ~]$ ./receiver
Message Received: Welcome to Shared Memory
[syed123@localhost ~]$
```