

Name: Syeda Isma Nazir

Class: BSCS-V


Subject: Web Development

Project: Developing a website

Website Title: Markaz

Url: Markaz Online Shopping and Dropshipping


MongoDB

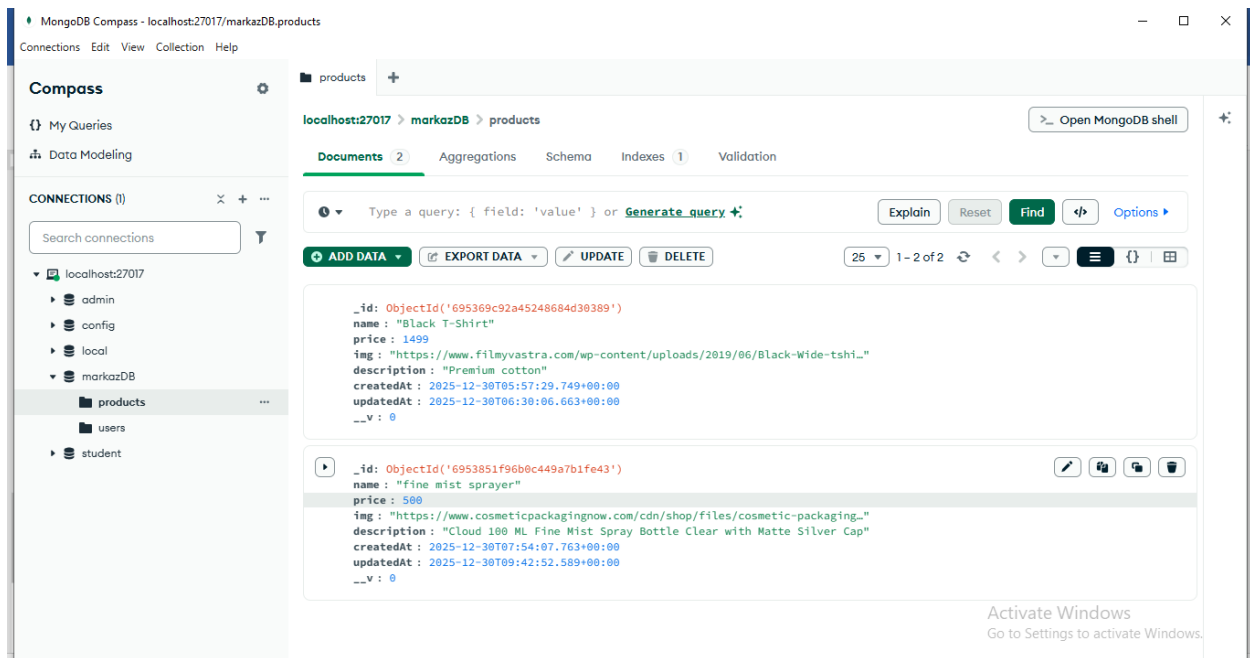


Home page




Cart page

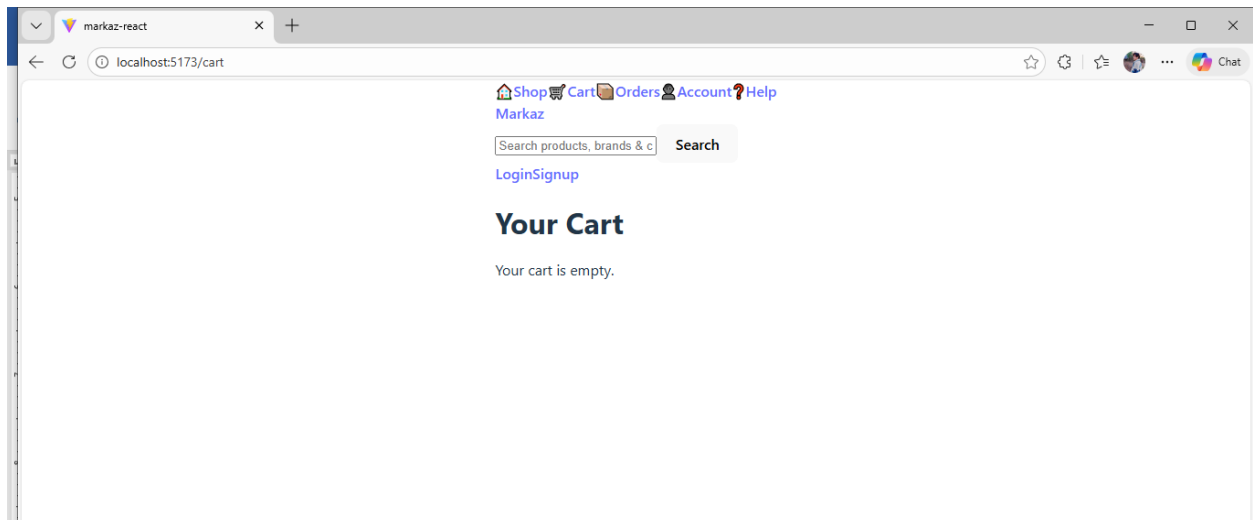

Orders page

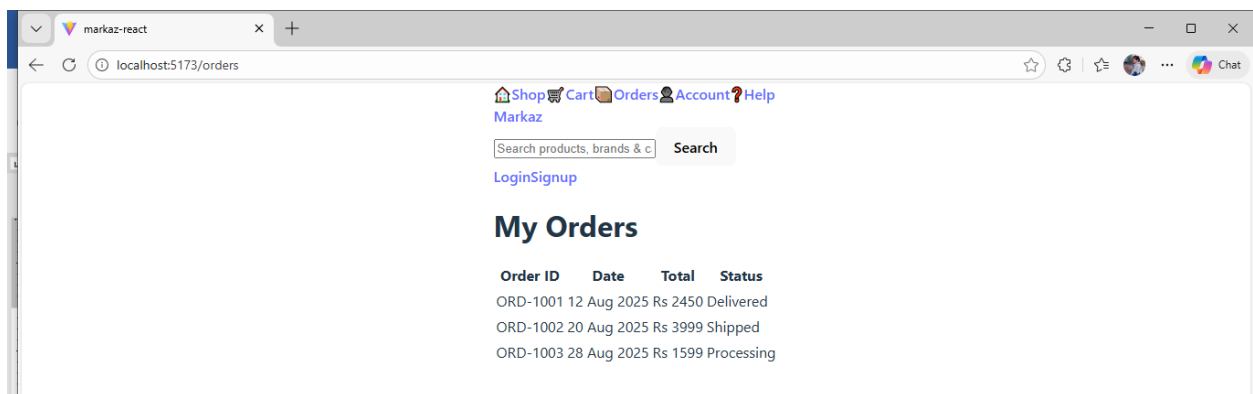


Account Page

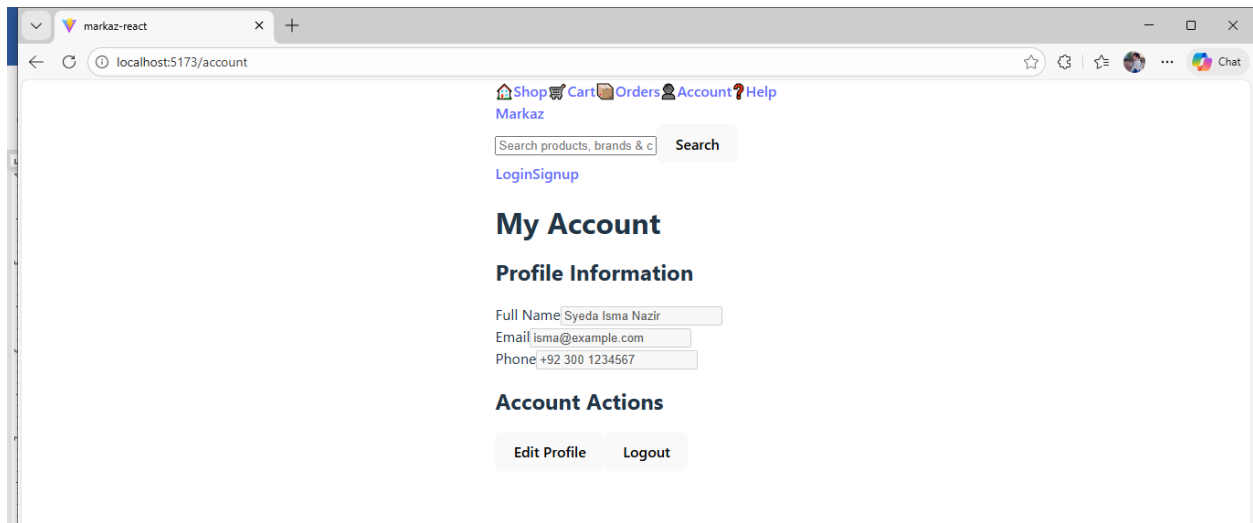

The screenshot shows a web browser window with the URL `localhost:5173/account`. The page features a navigation bar with links for Shop, Cart, Orders, Account, and Help. Below the navigation bar is a search bar and a Login/Signup link. The main content area is titled "My Account" and includes a "Profile Information" section with input fields for Full Name (Syeda Isma Nazir), Email (isma@example.com), and Phone (+92 300 1234567). Below this is an "Account Actions" section with buttons for "Edit Profile" and "Logout".


Help page

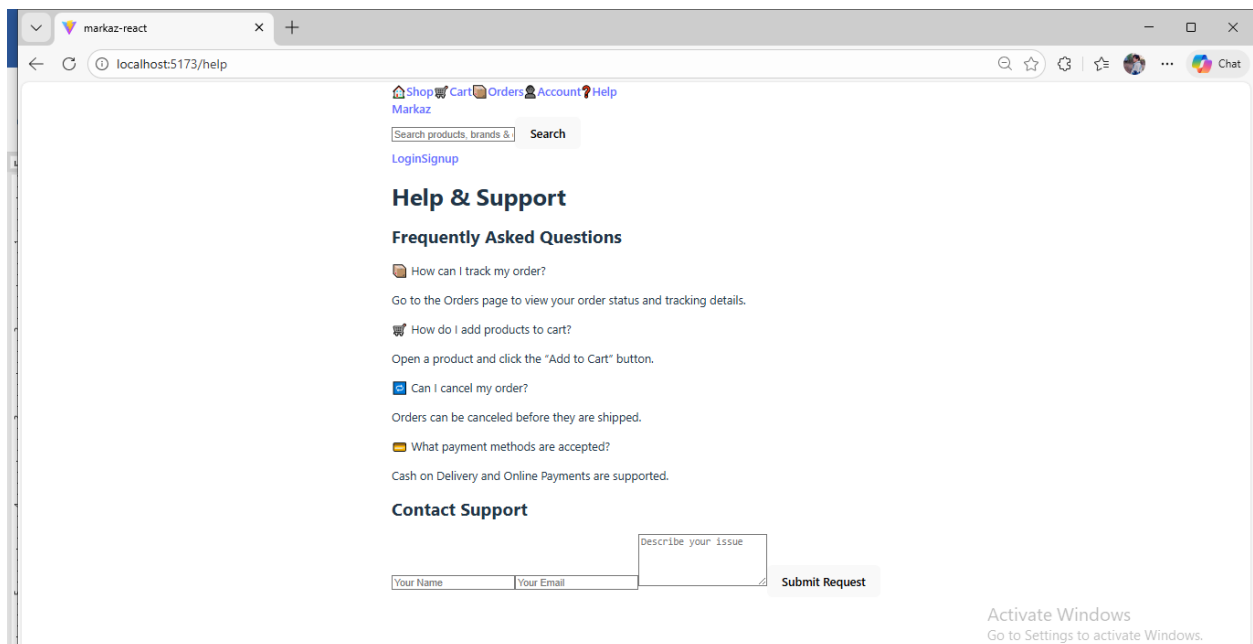


The screenshot shows a web browser window with the URL `localhost:5173/help`. The page features a navigation bar with links for Shop, Cart, Orders, Account, and Help. Below the navigation bar is a search bar and a Login/Signup link. The main content area is titled "Help & Support" and includes a "Frequently Asked Questions" section with three questions and answers. Below this is a "Contact Support" section with input fields for "Your Name", "Your Email", and "Describe your issue", and a "Submit Request" button. A watermark for "Activate Windows" is visible in the bottom right corner.

CRUD OPERATION


ADD

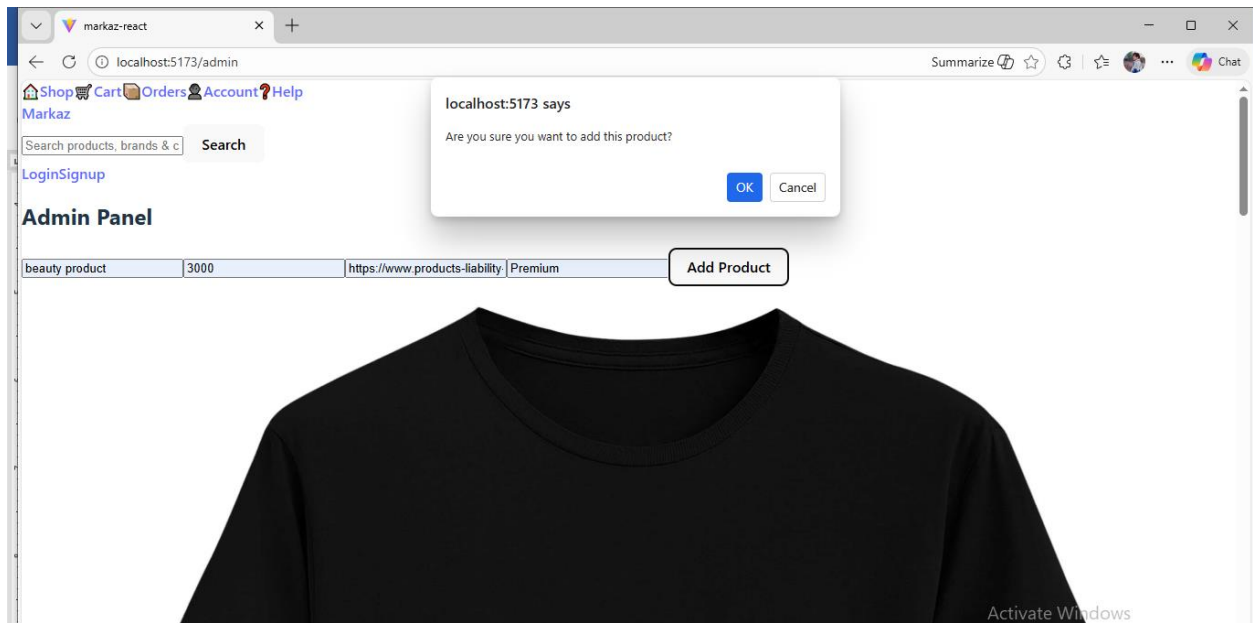

Read

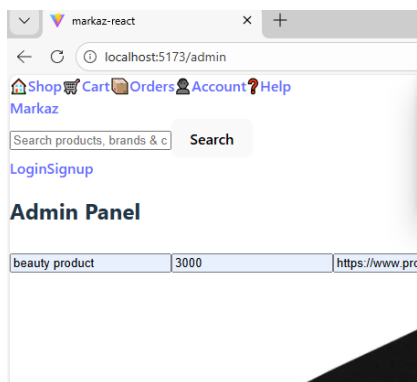


Update/Delete

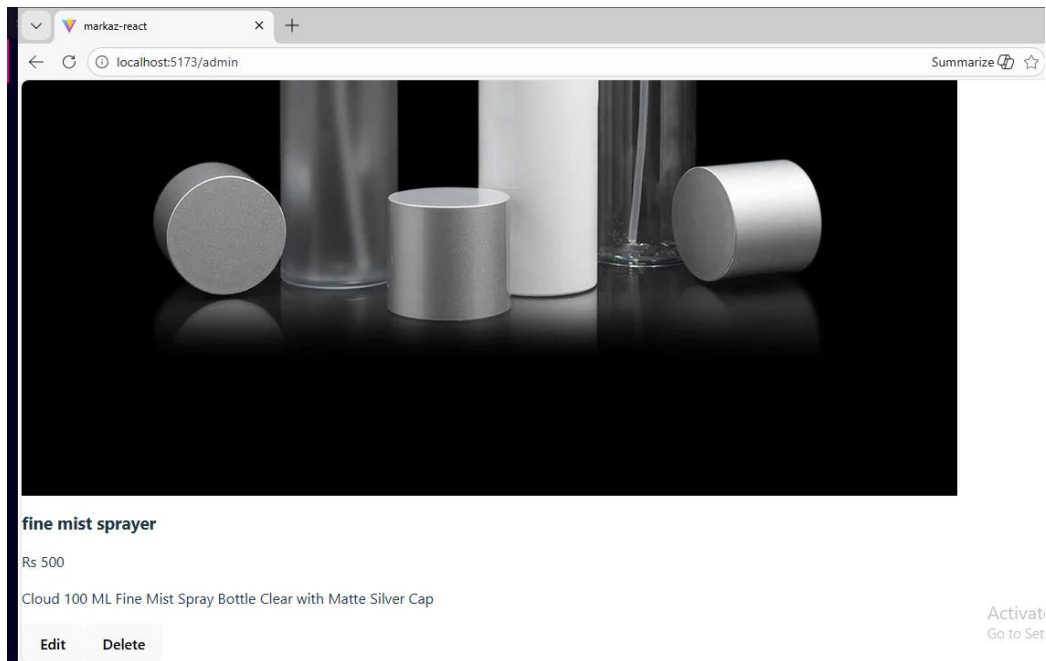


CURD OPERATION IN VS CODE USING THUNDER

1 READ (GET all products)

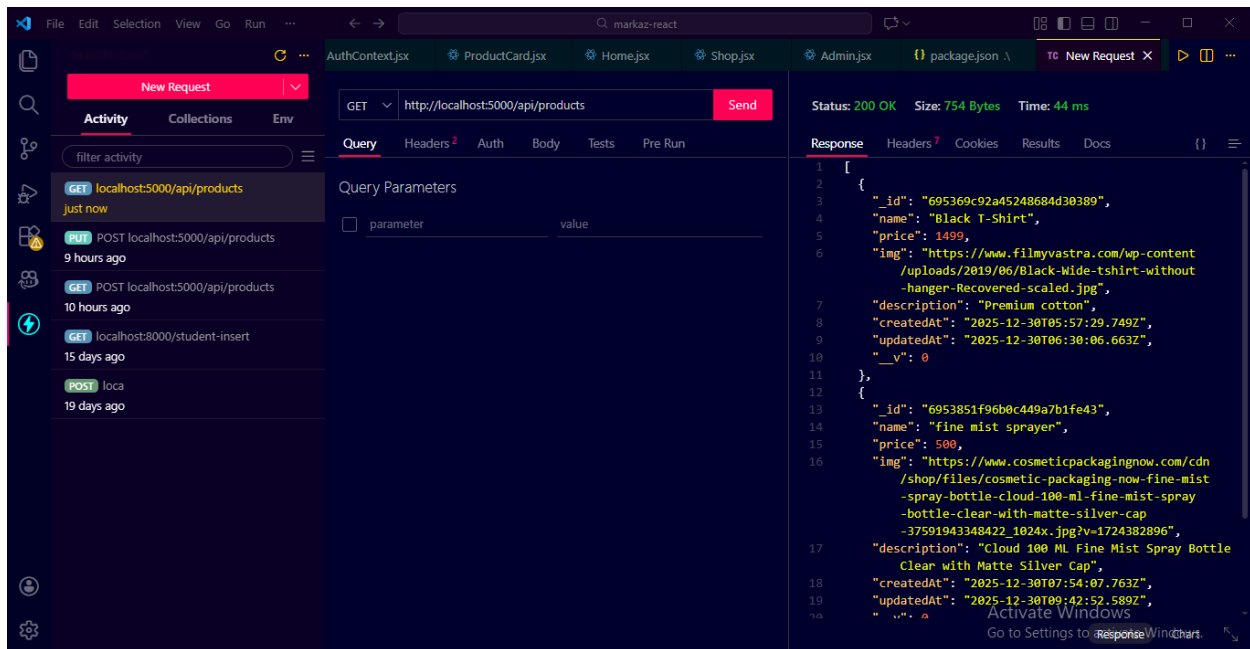

2 CREATE (Add new product)

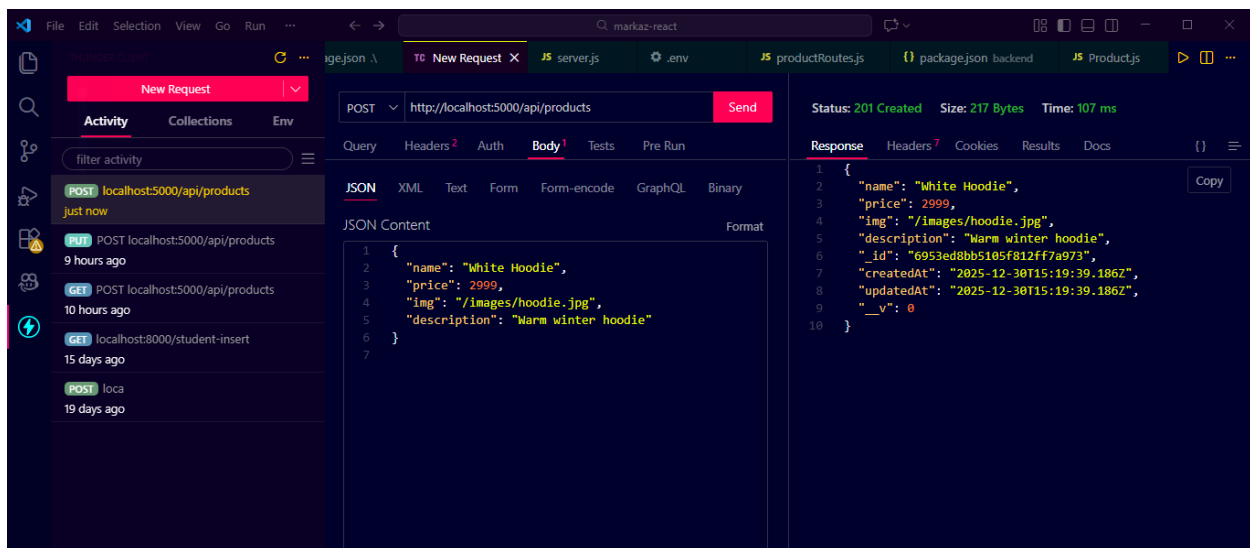

3 UPDATE (Edit product)

The screenshot shows the VS Code editor with the REST Client extension. A new request is being edited with the method **PUT** and the URL `http://localhost:5000/api/products/695369c92a45248684d30389`. The request body is in JSON format:

```
1 {
2   "name": "Black T-Shirt Updated",
3   "price": 1599,
4   "img": "/images/black-new.jpg",
5   "description": "Updated premium cotton"
6 }
```

The response is shown on the right, with status **200 OK**, size **233 Bytes**, and time **51 ms**. The response body is a JSON object:

```
1 {
2   "_id": "695369c92a45248684d30389",
3   "name": "Black T-Shirt Updated",
4   "price": 1599,
5   "img": "/images/black-new.jpg",
6   "description": "Updated premium cotton",
7   "createdAt": "2025-12-30T05:57:29.749Z",
8   "updatedAt": "2025-12-30T15:22:32.420Z",
9   "__v": 0
10 }
```

◆ 4 DELETE (Remove product)

The screenshot shows the VS Code editor with the REST Client extension. A new request is being edited with the method **DELETE** and the URL `http://localhost:5000/api/products/695369c92a45248684d30389`. The request body is empty. The response is shown on the right, with status **200 OK**, size **29 Bytes**, and time **17 ms**. The response body is a JSON object:

```
1 {
2   "message": "Product deleted"
3 }
```