W.S = 10 byte


Duplex :-

Client ⇄ Server

Client :- 21 to 30


1 Piggy backing

2 data and Ack on same tim

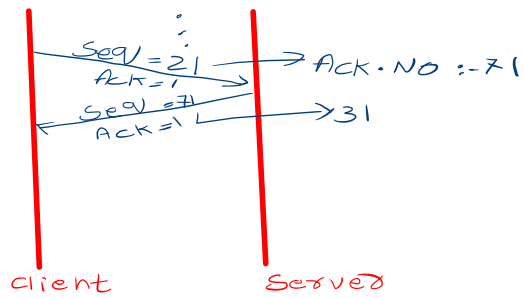


Pure Ack :-

is used and in this seq number is not used during ack

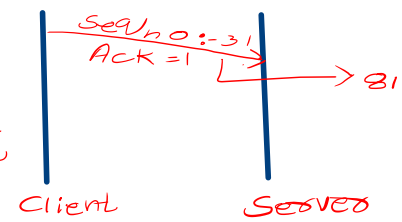

Connection termination

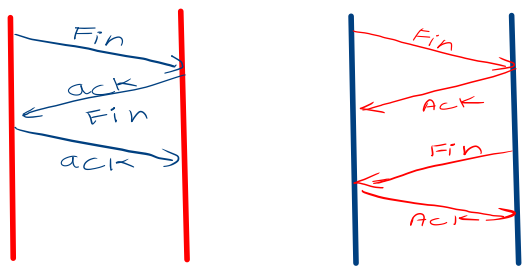

3-way

4-way

Congestion :- Network too much data sent.

2 sender and 2 Receiver :-

infinite buffer
no retransmission

Additive I / M decrease
- Cut cwind in half
- Increase mss by 1

unack Packet :- Last Byte sent - last bit

Slow start :- increase cwind by 1.
- in power of 2

if loss half the size of cwind

3 Ack - (duplicate)

timeout

