PRACTICAL LAB: JAVASCRIPT OPERATORS MASTERY

Course: DFK20013 Web Design Technology

Topic: 3.1.1 Variables, Data Types, and Operators

Duration: 60 – 90 Minutes

Student Name	SITI NUR SYIFFA BALQIS BINTI MOHAMAD ZUKI
Registration No	10DIT25F1038
Date	2/3/2026

---

1. Learning Outcomes

By the end of this lab, students should be able to:

- Implement **Arithmetic Operators** for calculations.
- Use **Assignment Operators** to update values efficiently.
- Control application states using **Increment/Decrement**.
- Validate user access using **Relational** and **Logical** operators.

---

2. Practical Task: The All-in-One Operator Workshop

Create a file named lab_operators.html. Copy and complete the coding below.

HTML

```
<!DOCTYPE html>

<html lang="en">

<head>

    <meta charset="UTF-8">

    <title>DFK20013: JS Operators Workshop</title>

    <style>

        body { font-family: 'Segoe UI', sans-serif; max-width: 850px;
margin: 2rem auto; background-color: #f0f2f5; padding: 20px; color:
#333; }

        section { background: white; padding: 25px; border-radius: 12px;
```

```
margin-bottom: 25px; box-shadow: 0 4px 6px rgba(0,0,0,0.1); }

        h2 { color: #2c3e50; border-left: 5px solid #3498db; padding-
left: 10px; margin-top: 0; }

        .output-box { background: #2c3e50; color: #27ae60; padding: 15px;
border-radius: 6px; font-family: 'Courier New', monospace; margin-top:
10px; }

        .short-note { background: #fff3cd; color: #856404; padding: 15px;
border-radius: 6px; margin-top: 15px; border-left: 5px solid #ffc107;
display: none; font-size: 0.9rem; }

        input { padding: 8px; width: 100px; border-radius: 4px; border:
1px solid #ccc; }

        button { padding: 8px 20px; background: #3498db; color: white;
border: none; border-radius: 4px; cursor: pointer; font-weight: bold; }

        button:hover { background: #2980b9; }

        code { background: #eee; padding: 2px 4px; border-radius: 3px;
font-weight: bold; color: #d63384; }

    </style>

</head>
```

```
<body>



    <header style="text-align: center; margin-bottom: 30px;">

        <h1>JavaScript Operators Mastery</h1>

        <p>Follow the steps and observe the Console and UI outputs.</p>

    </header>
```

```
    <section>

        <h2>Task 1: Basic Arithmetic (Check Console)</h2>

        <p>This task demonstrates background calculations using
<code>+</code>, <code>-</code>, <code>*</code>, <code>/</code>,
<code>**</code>, and <code>%</code>.</p>

        <button onclick="runTask1()">Run Console Logic</button>

    </section>
```

```
    <section>

        <h2>Task 2: POS System (Arithmetic & Assignment)</h2>

        <p>Price: RM 50.00. <strong>Promo:</strong> Buy > 4 units to get
RM 20.00 discount.</p>

        Quantity: <input type="number" id="qty" value="1">

        <button onclick="runTask2()">Calculate Total</button>

        <div id="outPOS" class="output-box">Final Total: RM 0.00</div>
```

```
        <div id="notePOS" class="short-note"></div>

    </section>
```

```
    <section>

        <h2>Task 3: Stock Control (Increment & Decrement)</h2>

        <p>Simulating inventory updates.</p>

        Stock Level: <span id="stockVal" style="font-size: 1.5rem; font-
weight: bold;">10</span><br><br>

        <button onclick="runTask3('inc')">Add (+)</button>

        <button onclick="runTask3('dec')"
style="background:#6c757d;">Remove (-)</button>

        <div id="noteStock" class="short-note"></div>

    </section>
```

```
    <section>

        <h2>Task 4: Gate Access (Relational & Logical)</h2>

        <p>Rules: Age 18+ OR (Age 13+ AND Parent present).</p>

        Age: <input type="number" id="age" placeholder="Age">

        <label><input type="checkbox" id="parent"> With
Parent?</label><br><br>

        <button onclick="runTask4()" style="background:#27ae60;">Verify
Entry</button>

        <div id="outSecurity" class="output-box">Status: Waiting...</div>

        <div id="noteSecurity" class="short-note"></div>

    </section>
```

Inside the <script> tag, type all the following code:

JAVASCRIPT:

1.

```
<script>
    // Helper to show explanations
    function showNote(id, text) {
        const noteDiv = document.getElementById(id);
        noteDiv.style.display = 'block';
        noteDiv.innerHTML = text;
    }
```

2.

```
// --- TASK 1: ARITHMETIC (BASIC) ---
function runTask1() {
    console.log("--- Task 1: Arithmetic Operations ---");
    let students = 31;
    students = students + 1;   // Addition
    students = students - 2;   // Subtraction
    students = students * 2;   // Multiplication
    students = students / 2;   // Division
    let power = 10 ** 2;       // Exponentiation (100)
    let remainder = 31 % 2;    // Modulus (1 - Odd)

    console.log("Final Student Count: " + students);
    console.log("10 to the power of 2: " + power);
    console.log("Remainder of 31/2: " + remainder);
    alert("Check Browser Console (F12) for results!");
}
```

3.

```
// --- TASK 2: POS SYSTEM (ARITHMETIC & ASSIGNMENT) ---
function runTask2() {
    let price = 50;
    let qty = parseInt(document.getElementById('qty').value);

    // a. Arithmetic Operator (*)
    let total = price * qty;
    let note = "<b>Subtopic (a) Arithmetic:</b> <code>*</
    code> multiplied " + price + " by " + qty + ".<br>";

    // b. Assignment Operator (-=)
    if (qty > 4) {
        total -= 20; // Shorthand for total = total - 20
        note += "<b>Subtopic (b) Assignment:</b> <code>-=</
        code> updated the total by subtracting the discount.";
    }

    document.getElementById('outPOS').textContent = "Final
    Total: RM " + total.toFixed(2);
    showNote('notePOS', note);
}
```

4.

```
// --- TASK 3: INCREMENT & DECREMENT ---
let stock = 10;
function runTask3(type) {
    let note = "";
    if (type === 'inc') {
        stock++; // (c) Increment
        note = "<b>Subtopic (c) Increment:</b> <code>++</
        code> increased the stock by 1.";
    } else {
        stock--; // (c) Decrement
        note = "<b>Subtopic (c) Decrement:</b> <code>--</
        code> decreased the stock by 1.";
    }
    document.getElementById('stockVal').textContent = stock;
    showNote('noteStock', note);
}
```

5.

```
    // --- TASK 4: RELATIONAL & LOGICAL ---
    function runTask4() {
        let age = parseInt(document.getElementById('age').value);
        let hasParent = document.getElementById('parent').checked;
        let status = document.getElementById('outSecurity');

        if (isNaN(age)) return alert("Please enter a valid age.");

        // d. Relational: >=
        // e. Logical: || (OR), && (AND)
        let isEligible = (age >= 18) || (age >= 13 && hasParent);

        status.textContent = isEligible ? "Status: ACCESS GRANTED
        ✅" : "Status: ACCESS DENIED ❌";
        status.style.color = isEligible ? "#27ae60" : "#ff4d4d";

        let note = "<b>Subtopic (d) Relational:</b> <code>>=</
        code> compared Age (" + age + ") to the limit.<br>";
        note += "<b>Subtopic (e) Logical:</b> Used <code>||</
        code> (OR) and <code>&&</code> (AND) to combine rules.";
        showNote('noteSecurity', note);
    }
</script>
```

Capture a screenshot of the output from the previous steps. **Observe** the results and **explain** your understanding of the process.

1.	**Screenshot of the output** 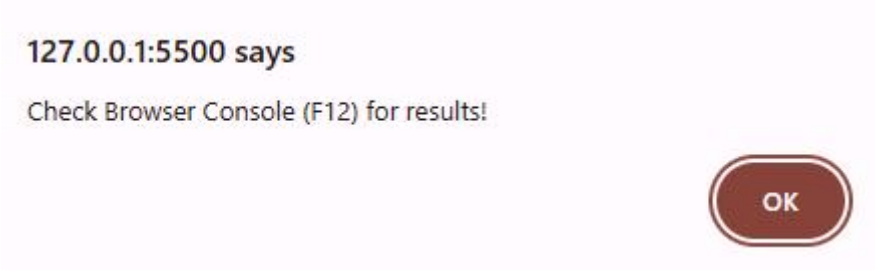
	Explanation - Alert() is used in runTask1() to tell user to open browser console to see the calculation results.

2.	**Screenshot of the output** 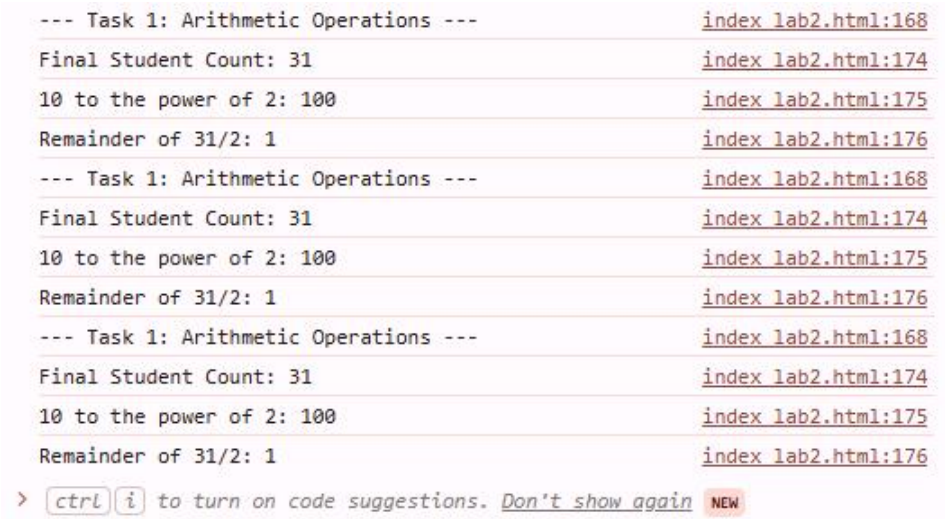
	Explanation - The console displays the results of arithmetic operations executed in the runTask1() to display each value

3.	*Screenshot of the output* 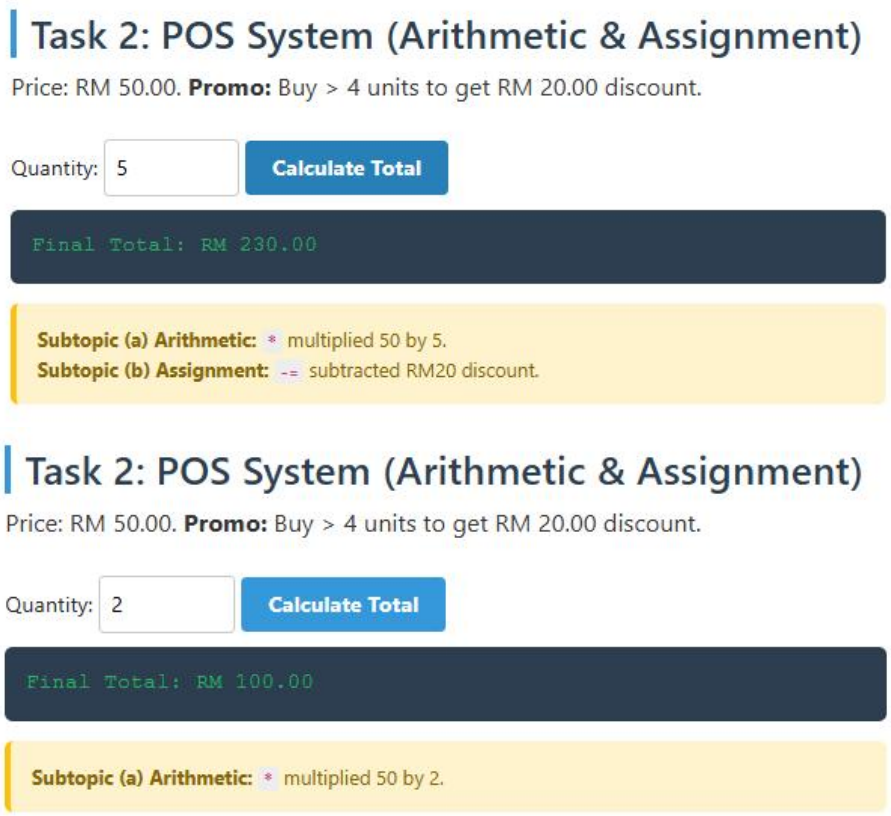
	Explanation *The program calculates the total price by multiplying the unit price (RM50.00) by the quantity entered, then uses an arithmetic operation and an assignment operator to subtract RM20.00 from the total if the quantity is more than 4, resulting in RM230.00 for 5 units (250 – 20) and RM100.00 for 2 units with no discount applied.*

4.	*Screenshot of the output*

Explanation

- When the "**Add (+)**" button is clicked, the increment operator ++ increases the stock value by 1.
- When the "**Remove (-)**" button is clicked, the decrement operator -- decreases the stock value by 1.
- The yellow explanation box appears to show that the increment (++) or decrement (--) operator was used to update the stock value.

5. **Screenshot of the output**

Explanation

The system checks the user's age using the relational operator (>=) and logical operators (|| and &&) to determine access, where access is granted if the age is 18 or above, or if the age is 13 or above with a parent present, and access is denied if these conditions are not satisfied.

3. Quick Check (Reflection)

Instruction: Answer the following questions based on your coding results.

1. **Modulus Utility:** Based on Task 1, if students % 2 returns 0, is the number even or odd?

   - Even

2. **Shorthand Power:** In Task 2, rewrite total -= 20 using the standard assignment method.

   total = total - 20

3. **Logical Priority:** In Task 4, why did we put (age >= 13 && hasParent) in parentheses?

   - improves readability

4. **Time Calculation:** (Extra Challenge) If a variable totalMinutes = 130, write the formula to find the remaining minutes after converting to hours using the **Modulus** operator.

   130 % 60 = 10

   = 2 hours and 10 minutes