

 Marwadi University	Marwadi University Faculty of Technology Department of Information and Communication Technology	
Subject: Artificial Intelligence (01CT0616)	Aim: To learn the Basics of Machine Learning	
Experiment No: 01	Date: 20/04/2026	Enrollment No: 92301733009

Aim: To learn the Basics of Machine Learning

IDE: Google Colab

Theory:

Machine learning is a subset of artificial intelligence in the field of computer science that often uses statistical techniques to give computers the ability to "learn" (i.e., progressively improve performance on a specific task) with data, without being explicitly programmed. In the past decade, machine learning has given us self-driving cars, practical speech recognition, effective web search, and a vastly improved understanding of the human genome.

Machine learning tasks

Machine learning tasks are typically classified into two broad categories, depending on whether there is a learning "signal" or "feedback" available to a learning system:

- **Supervised learning:** The computer is presented with example inputs and their desired outputs, given by a "teacher", and the goal is to learn a general rule that maps inputs to outputs. As special cases, the input signal can be only partially available, or restricted to special feedback:
- **Semi-supervised learning:** the computer is given only an incomplete training signal: a training set with some (often many) of the target outputs missing.
- **Active learning:** the computer can only obtain training labels for a limited set of instances (based on a budget), and also has to optimize its choice of objects to acquire labels for. When used interactively, these can be presented to the user for labeling.
- **Reinforcement learning:** training data (in form of rewards and punishments) is given only as feedback to the program's actions in a dynamic environment, such as driving a vehicle or playing a game against an opponent.
- **Unsupervised learning:** No labels are given to the learning algorithm, leaving it on its own to find structure in its input. Unsupervised learning can be a goal in itself (discovering hidden patterns in data) or a means towards an end (feature learning).

Machine learning applications

 Marwadi University	Marwadi University Faculty of Technology Department of Information and Communication Technology	
Subject: Artificial Intelligence (01CT0616)	Aim: To learn the Basics of Machine Learning	
Experiment No: 01	Date: 20/04/2026	Enrollment No: 92301733009

In classification, inputs are divided into two or more classes, and the learner must produce a model that assigns unseen inputs to one or more (multi-label classification) of these classes. This is typically tackled in a supervised manner. Spam filtering is an example of classification, where the inputs are email (or other) messages and the classes are "spam" and "not spam". In regression, also a supervised problem, the outputs are continuous rather than discrete.

In clustering, a set of inputs is to be divided into groups. Unlike in classification, the groups are not known beforehand, making this typically an unsupervised task. Density estimation finds the distribution of inputs in

 Marwadi University	Marwadi University Faculty of Technology Department of Information and Communication Technology	
Subject: Artificial Intelligence (01CT0616)	Aim: To learn the Basics of Machine Learning	
Experiment No: 01	Date: 20/04/2026	Enrollment No: 92301733009

some space. Dimensionality reduction simplifies inputs by mapping them into a lower- dimensional space. Topic modeling is a related problem, where a program is given a list of human language documents and is tasked with finding out which documents cover similar topics.

Machine learning Approaches

Decision tree learning: Decision tree learning uses a decision tree as a predictive model, which maps observations about an item to conclusions about the item's target value. Association rule learning Association rule learning is a method for discovering interesting relations between variables in large databases.

Artificial neural networks

An artificial neural network (ANN) learning algorithm, usually called "neural network" (NN), is a learning algorithm that is vaguely inspired by biological neural networks. Computations are structured in terms of an interconnected group of artificial neurons, processing information using a connectionist approach to computation. Modern neural networks are non-linear statistical data modeling tools. They are usually used to model complex relationships between inputs and outputs, to find patterns in data, or to capture the statistical structure in an unknown joint probability distribution between observed variables.

Deep learning

Falling hardware prices and the development of GPUs for personal use in the last few years have contributed to the development of the concept of deep learning which consists of multiple hidden layers in an artificial neural network. This approach tries to model the way the human brain processes light and sound into vision and hearing. Some successful applications of deep learning are computer vision and speech recognition.

Inductive logic programming

Inductive logic programming (ILP) is an approach to rule learning using logic programming as a uniform representation for input examples, background knowledge, and hypotheses. Given an encoding of the known background knowledge and a set of examples represented as a logical database of facts, an ILP system will derive a hypothesized logic program that entails all positive and no negative examples. Inductive programming is a related field that considers any kind of programming languages for representing hypotheses (and not only logic programming), such as functional programs.

 Marwadi University	Marwadi University Faculty of Technology Department of Information and Communication Technology	
Subject: Artificial Intelligence (01CT0616)	Aim: To learn the Basics of Machine Learning	
Experiment No: 01	Date: 20/04/2026	Enrollment No: 92301733009

Support vector machines

Support vector machines (SVMs) are a set of related supervised learning methods used for classification and regression. Given a set of training examples, each marked as belonging to one of two categories, an SVM training algorithm builds a model that predicts whether a new example falls into one category or the other.

Clustering

Cluster analysis is the assignment of a set of observations into subsets (called clusters) so that observations within the same cluster are similar according to some pre designated criterion or criteria, while observations drawn from different clusters are dissimilar. Different clustering techniques make different assumptions on the

 Marwadi University	Marwadi University Faculty of Technology Department of Information and Communication Technology	
Subject: Artificial Intelligence (01CT0616)	Aim: To learn the Basics of Machine Learning	
Experiment No: 01	Date: 20/04/2026	Enrollment No: 92301733009

structure of the data, often defined by some similarity metric and evaluated for example by internal compactness (similarity between members of the same cluster) and separation between different clusters. Other methods are based on estimated density and graph connectivity. Clustering is a method of unsupervised learning, and a common technique for statistical data analysis.

Bayesian networks

A Bayesian network, belief network or directed acyclic graphical model is a probabilistic graphical model that represents a set of random variables and their conditional independencies via a directed acyclic graph (DAG). For example, a Bayesian network could represent the probabilistic relationships between diseases and symptoms. Given symptoms, the network can be used to compute the probabilities of the presence of various diseases. Efficient algorithms exist that perform inference and learning.

Reinforcement learning

Reinforcement learning is concerned with how an agent ought to take actions in an environment so as to maximize some notion of long-term reward. Reinforcement learning algorithms attempt to find a policy that maps states of the world to the actions the agent ought to take in those states. Reinforcement learning differs from the supervised learning problem in that correct input/output pairs are never presented, nor sub-optimal actions explicitly corrected.

Similarity and metric learning

In this problem, the learning machine is given pairs of examples that are considered similar and pairs of less similar objects. It then needs to learn a similarity function (or a distance metric function) that can predict if new objects are similar. It is sometimes used in Recommendation systems.

Genetic algorithms

A genetic algorithm (GA) is a search heuristic that mimics the process of natural selection, and uses methods such as mutation and crossover to generate new genotype in the hope of finding good solutions to a given problem. In machine learning, genetic algorithms found some uses in the 1980s and 1990s. Conversely, machine learning techniques have been used to improve the performance of genetic and evolutionary algorithms.

 Marwadi University	Marwadi University Faculty of Technology Department of Information and Communication Technology	
Subject: Artificial Intelligence (01CT0616)	Aim: To learn the Basics of Machine Learning	
Experiment No: 01	Date: 20/04/2026	Enrollment No: 92301733009

Rule-based machine learning

Rule-based machine learning is a general term for any machine learning method that identifies, learns, or evolves "rules" to store, manipulate or apply, knowledge. The defining characteristic of a rule-based machine learner is the identification and utilization of a set of relational rules that collectively represent the knowledge captured by the system. This is in contrast to other machine learners that commonly identify a singular model that can be universally applied to any instance in order to make a prediction. Rule-based machine learning approaches include learning classifier systems, association rule learning, and artificial immune systems.

 Marwadi University	Marwadi University Faculty of Technology Department of Information and Communication Technology	
Subject: Artificial Intelligence (01CT0616)	Aim: To learn the Basics of Machine Learning	
Experiment No: 01	Date: 20/04/2026	Enrollment No: 92301733009

Feature selection approach

Feature selection is the process of selecting an optimal subset of relevant features for use in model construction. It is assumed the data contains some features that are either redundant or irrelevant, and can thus be removed to reduce calculation cost without incurring much loss of information. Common optimality criteria include accuracy, similarity and information measures.

Pre Lab Exercise:

- a. Write 5 applications, that you encounter daily, where Machine Learning is used?

A: Recommendation Systems, Email Spam Filtering, Voice Assistants, Online Shopping Suggestions, Face Recognition.

- b. What do you mean by Supervised Learning?

A: Supervised learning is a machine learning approach where models are trained on labeled datasets to learn the relationship between inputs and outputs, enabling accurate predictions for new data.

- c. What do you mean by Unsupervised Learning?

A: Unsupervised learning is a machine learning approach where models analyze unlabeled data to discover hidden patterns, groupings, or relationships without prior knowledge of outcomes

- d. What do you mean by Reinforcement Learning?

A: Reinforcement learning is a machine learning technique where an agent learns optimal behavior through trial and error by interacting with an environment and maximizing cumulative rewards.

 Marwadi University	Marwadi University Faculty of Technology Department of Information and Communication Technology	
Subject: Artificial Intelligence (01CT0616)	Aim: To learn the Basics of Machine Learning	
Experiment No: 01	Date: 20/04/2026	Enrollment No: 92301733009

Program (Code):

Perform the following tasks:

1. Load a dataset in your IDE
2. Observe the statistics of all the features
3. Obtain the shape of the dataset
4. Separate all the features
5. Fill the missing values, if any, using the statistically relevant value
6. Observe the Box-Plot of each feature
7. Comment on the IQR range and outliers

 Marwadi University	Marwadi University Faculty of Technology Department of Information and Communication Technology	
Subject: Artificial Intelligence (01CT0616)	Aim: To learn the Basics of Machine Learning	
Experiment No: 01	Date: 20/04/2026	Enrollment No: 92301733009

1. Load required libraries

```
import pandas as pd
```

```
import numpy as np
```

```
import matplotlib.pyplot as plt # 2. Load
```

```
dataset
```

```
data = pd.read_csv('/content/study_hours_marks.csv') # change
```

```
filename if needed
```

3. Observe statistics of all features

```
print("Statistical Summary:") print(data.describe())
```

4. Obtain shape of dataset

```
print("\nShape of dataset:")
```

```
print(data.shape)
```

5. Separate all features

```
X = data.drop(columns=['Y']) # features Y =
```

```
data['Y'] # target
```

```
print("\nFeatures:")
```

```
print(X.head())
```

6. Handle missing values

Fill with mean (best for numerical data)

```
X = X.fillna(X.mean())
```

7. Box-plot of each feature

```
plt.figure(figsize=(6,4)) X.boxplot()
```

```
plt.title("Boxplot of Features") plt.show()
```

8. IQR and Outlier Detection for

column in X.columns:

```
Q1 = X[column].quantile(0.25) Q3 =
```

```
X[column].quantile(0.75)
```

```
IQR = Q3 - Q1
```

 Marwadi University	Marwadi University Faculty of Technology Department of Information and Communication Technology	
Subject: Artificial Intelligence (01CT0616)	Aim: To learn the Basics of Machine Learning	
Experiment No: 01	Date: 20/04/2026	Enrollment No: 92301733009

lower_bound = Q1 - 1.5 * IQR upper_bound =

Q3 + 1.5 * IQR

outliers = X[(X[column] < lower_bound) | (X[column] > upper_bound)] print(f"\nFeature: {column}")

print(f"IQR: {IQR}")

print(f"Lower Bound: {lower_bound}, Upper Bound: {upper_bound}")

print(f"Number of Outliers: {len(outliers)}")


 Marwadi University	Marwadi University Faculty of Technology Department of Information and Communication Technology	
Subject: Artificial Intelligence (01CT0616)	Aim: To learn the Basics of Machine Learning	
Experiment No: 01	Date: 20/04/2026	Enrollment No: 92301733009

Results:

To be attached with

Statistical Summary:

	X	Y
count	8.00000	8.000000
mean	4.50000	60.000000
std	2.44949	17.320508
min	1.00000	35.000000
25%	2.75000	47.500000
50%	4.50000	62.500000
75%	6.25000	71.250000
max	8.00000	85.000000

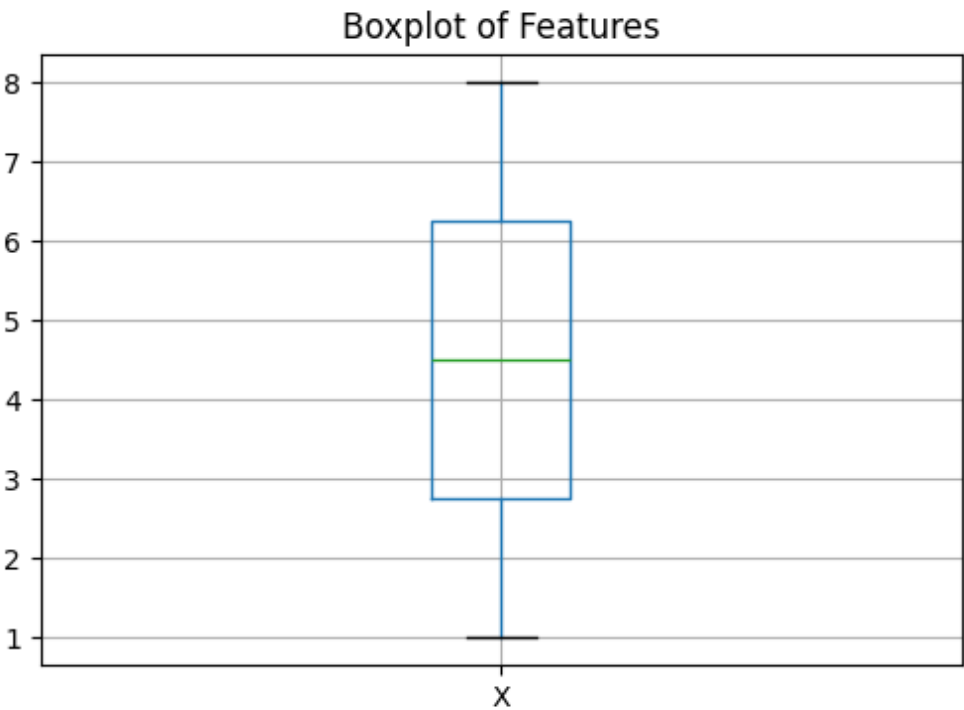

 Marwadi University	Marwadi University Faculty of Technology Department of Information and Communication Technology	
Subject: Artificial Intelligence (01CT0616)	Aim: To learn the Basics of Machine Learning	
Experiment No: 01	Date: 20/04/2026	Enrollment No: 92301733009

Observation and Result Analysis:

- a. Statistics of the dataset

A: Statistical analysis provides insights into data distribution, central tendency, and variability. It helps identify patterns, detect anomalies, and prepare data for further processing in machine learning tasks.

- b. IQR and Outliers

A: The IQR is used to measure the spread of the central data and identify outliers. Values lying beyond 1.5 times the IQR from the quartiles are considered outliers, which may affect model performance and require handling.

Post Lab Exercise:

- a. Which is a better mean of replacing the missing value-mean, median or mode?

A: There is no single best method for all cases. Mean is suitable for normally distributed data, median is preferred for skewed data with outliers, and mode is used for categorical variables. Among them, median is generally more robust and widely preferred for numerical data.

- b. How IQR range helps to understand the nature of the distribution of the data?

A: The IQR helps understand the distribution by measuring the spread of central data, detecting outliers, and identifying skewness. It is a robust statistical measure that provides reliable insights into the nature of the dataset.

- c. Which are the ways to replace the categorical data to the numerical ones?

A: Label Encoding, One-Hot Encoding, Ordinal Encoding, Binary Encoding, Frequency / Count Encoding, Target Encoding (Mean Encoding), Hash Encoding.