Building an ELB with 2 instances in 2 target group

```
#!/bin/bash
# Use this for your user data (script from top to bottom)
# install httpd (Linux 2 version)
yum update -y
yum install -y httpd
systemctl start httpd
systemctl enable httpd
mkdir var/www/html/target2
echo "<h1>Sylvain says Hello from $(hostname -f)</h1>" > /var/www/html/target2/index.html
```

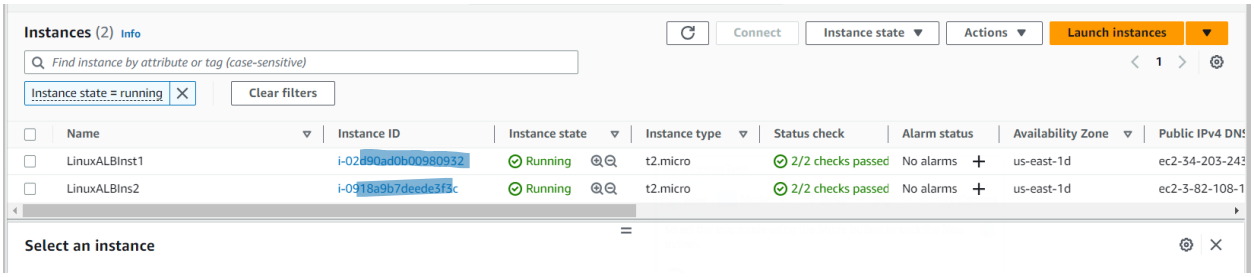

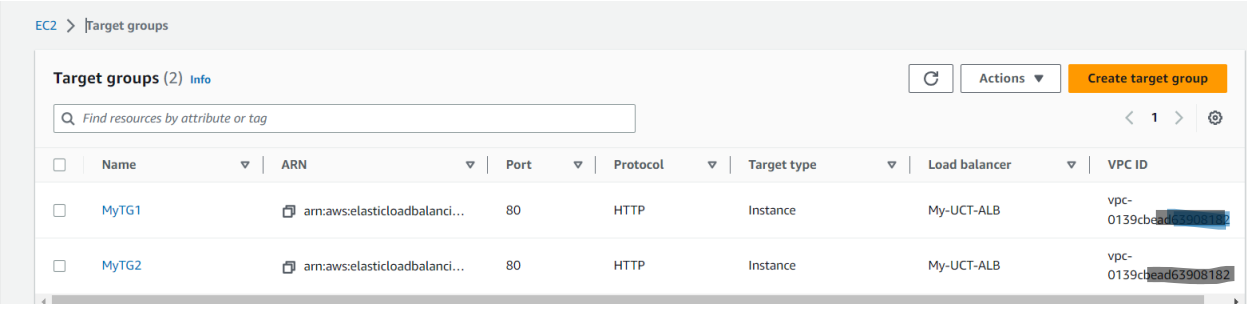

MyTG1

Actions

Details

arn:aws:elasticloadbalancing:us-east-[redacted]/MyTG1/d76ff315dfad9e0e

Target type	Protocol : Port	Protocol version	VPC
Instance	HTTP: 80	HTTP1	vpc-01[redacted]182
IP address type	Load balancer		
IPv4	My-UCT-ALB		

Total targets	Healthy	Unhealthy	Unused	Initial	Draining
1	1	0	0	0	0

Distribution of targets by Availability Zone (AZ)

Select values in this table to see corresponding filters applied to the Registered targets table below.

Targets | Monitoring | Health checks | Attributes | Tags

Registered targets (1)

Deregister | Register targets

Filter resources by property or value

Instance ID	Name	Port	Zone	Health status	Health status details
i-02d90ad[redacted]	LinuxALBInst1	80	us-east-1d	healthy	

EC2 > Load balancers

Load balancers (1)

Elastic Load Balancing scales your load balancer capacity automatically in response to changes in incoming traffic.

Actions | Create load balancer

Find resources by attribute or tag

Name	DNS name	State	VPC ID	Availability Zones	Type	Da
My-UCT-ALB	My-UCT-ALB-[redacted].us-east-1.elb.amazonaws.com	Active	vpc-01[redacted]182	2 Availability Zones	application	Ju (U

EC2 > Load balancers > My-UCT-ALB

My-UCT-ALB

Actions

Details

Load balancer type	Status	VPC	IP address type
Application	Active	vpc-0139[redacted]	IPv4
Scheme	**Hosted zone**	**Availability Zones**	**Date created**
Internet-facing	Z3[redacted]	subnet-028[redacted] us-east-1d (use1-az2) subnet-0b[redacted] us-east-1e (use1-az3)	June 10, 2023, 09:39 (UTC-05:00)

Load balancer ARN
arn:aws:elasticloadbalancing:us-east-1:848717736315:loadbalancer/app/My-UCT-ALB/dcb2d4d2409455ad

DNS name
My-UCT-ALB-426236883.us-east-1.elb.amazonaws.com (A Record)

Listeners | Network mapping | Security | Monitoring | Integrations | Attributes | Tags

Listeners (1)

A listener checks for connection requests on its port and protocol. Traffic received by the listener is routed according to its rules.

Actions | Add listener

Filter listeners by property or value

Protocol:Port	Default action	Rules	ARN	Security policy	Default SSL cert	Tags
HTTP:80	Forward to target group • MyTG1: 1 (100%) • Group-level stickiness: Off	2 rules	ARN	Not applicable	Not applicable	0 tags

Not secure | my-uct-alb-426236883.us-east-1.elb.amazonaws.com

Sylvain says Hello from ip-172-31-81-154.ec2.internal

Rules | My-UCT-ALB | HTTP:80

Click a location for your new rule. Each rule must include one action of type forward, redirect, fixed response.

New rule was created successfully.

My-UCT-ALB | HTTP:80 (2 rules)

Rule limits for condition values, wildcards, and total rules.

Insert Rule

		IF	THEN
1	arn...98159	Path is /target2/index.html	Forward to MyTG2: 1 (100%) Group-level stickiness: Off

Insert Rule

		IF	THEN
last	HTTP 80: default action *This rule cannot be moved or deleted*	Requests otherwise not routed	Forward to MyTG1: 1 (100%) Group-level stickiness: Off

Not secure | my-uct-alb-426236883.us-east-1.elb.amazonaws.com/target2/index.html

Sylvain says Hello from ip-172-31-95-165.ec2.internal