



Hello-World Image	
FS Snapshot	Startup Command
hello-world	> Run hello-world

Busybox Image	
FS Snapshot	Startup Command
busybox stuff	???


Redis Image	
FS Snapshot	Startup Command
redis stuff	> Run redis




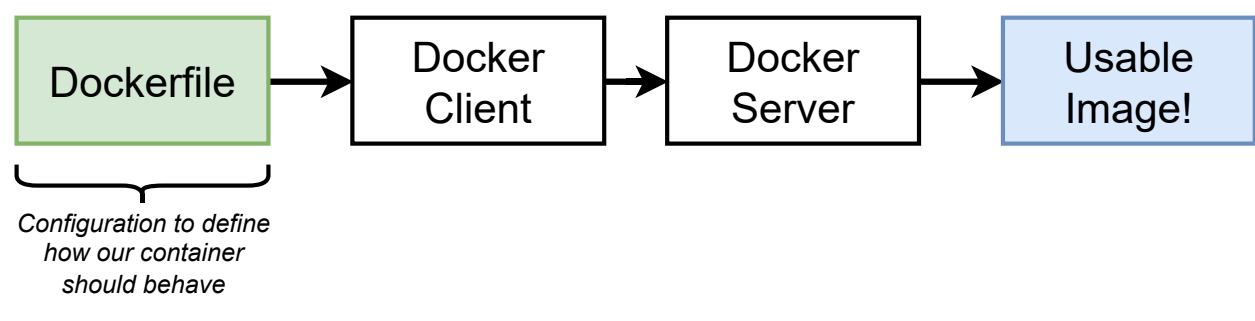


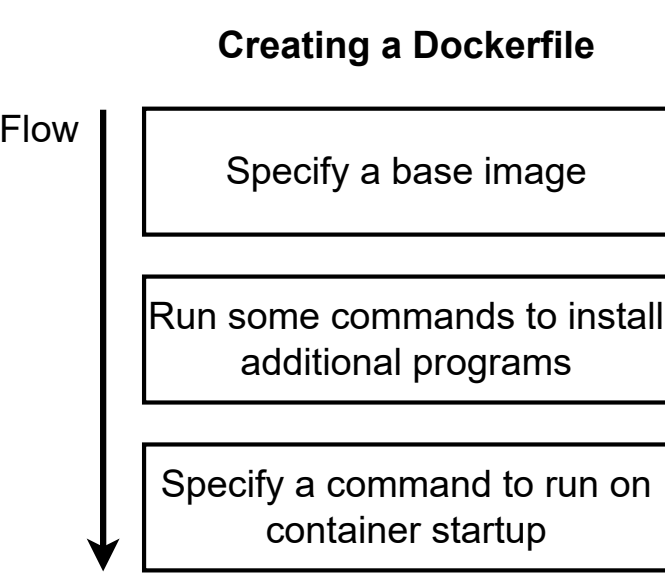
Create an image that runs redis-server

*Goal*

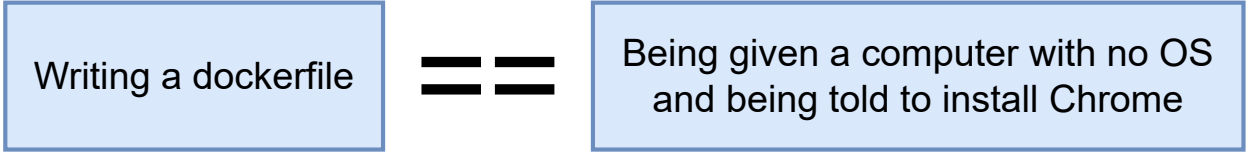


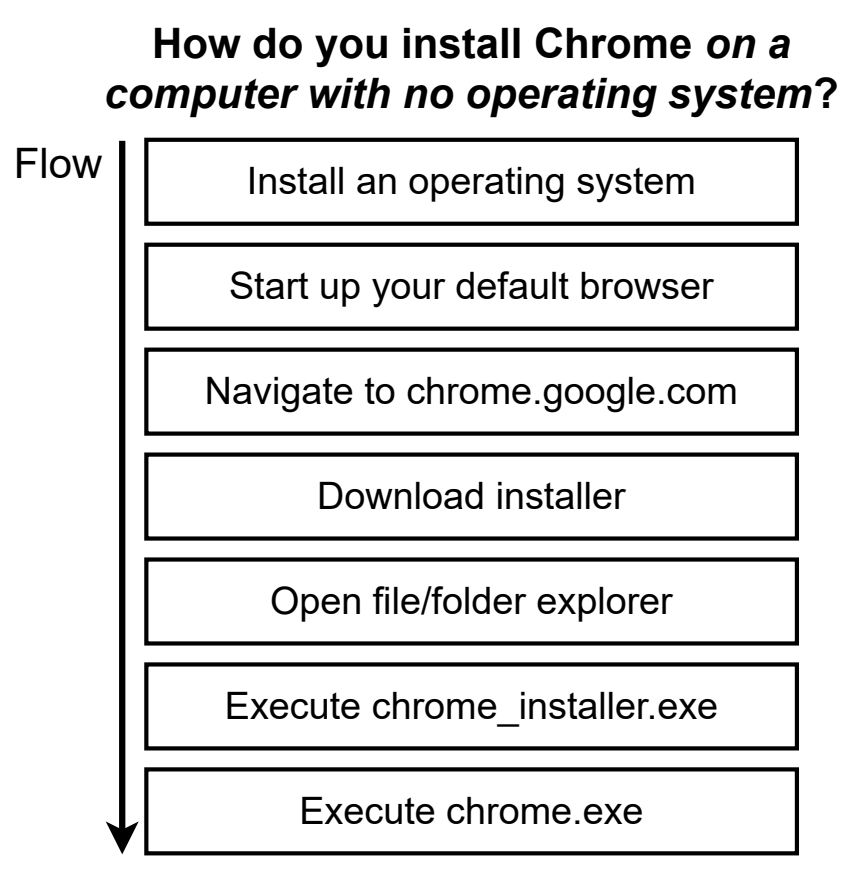

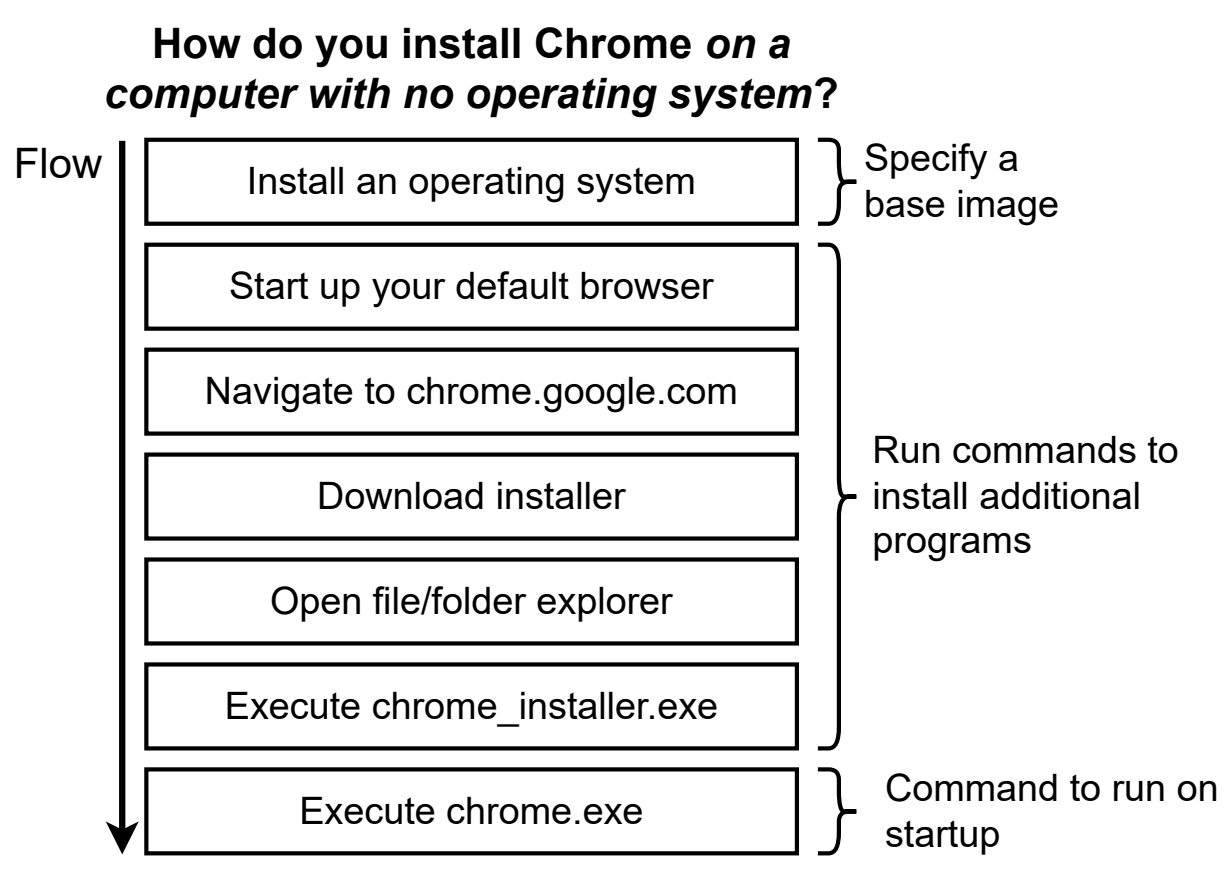

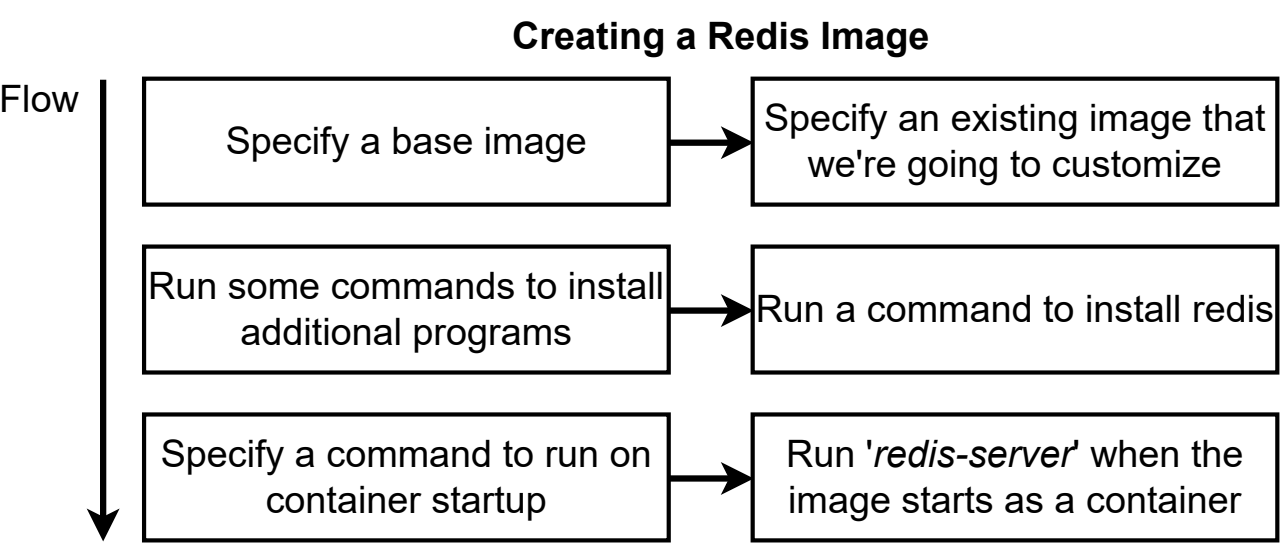




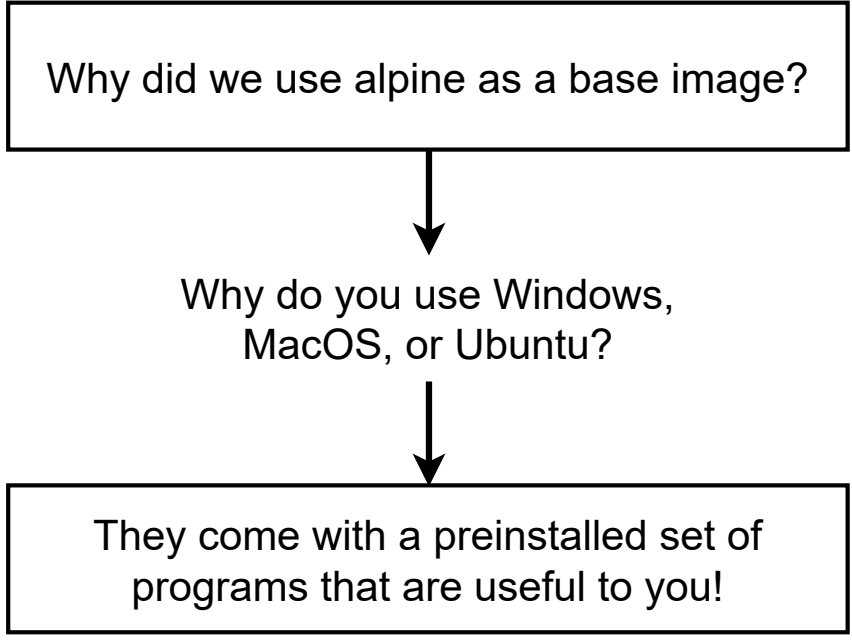

Instruction telling  
Docker Server  
what to do

Argument to the  
instruction

FROM	alpine
RUN	apk add --update redis
CMD	["redis-server"]

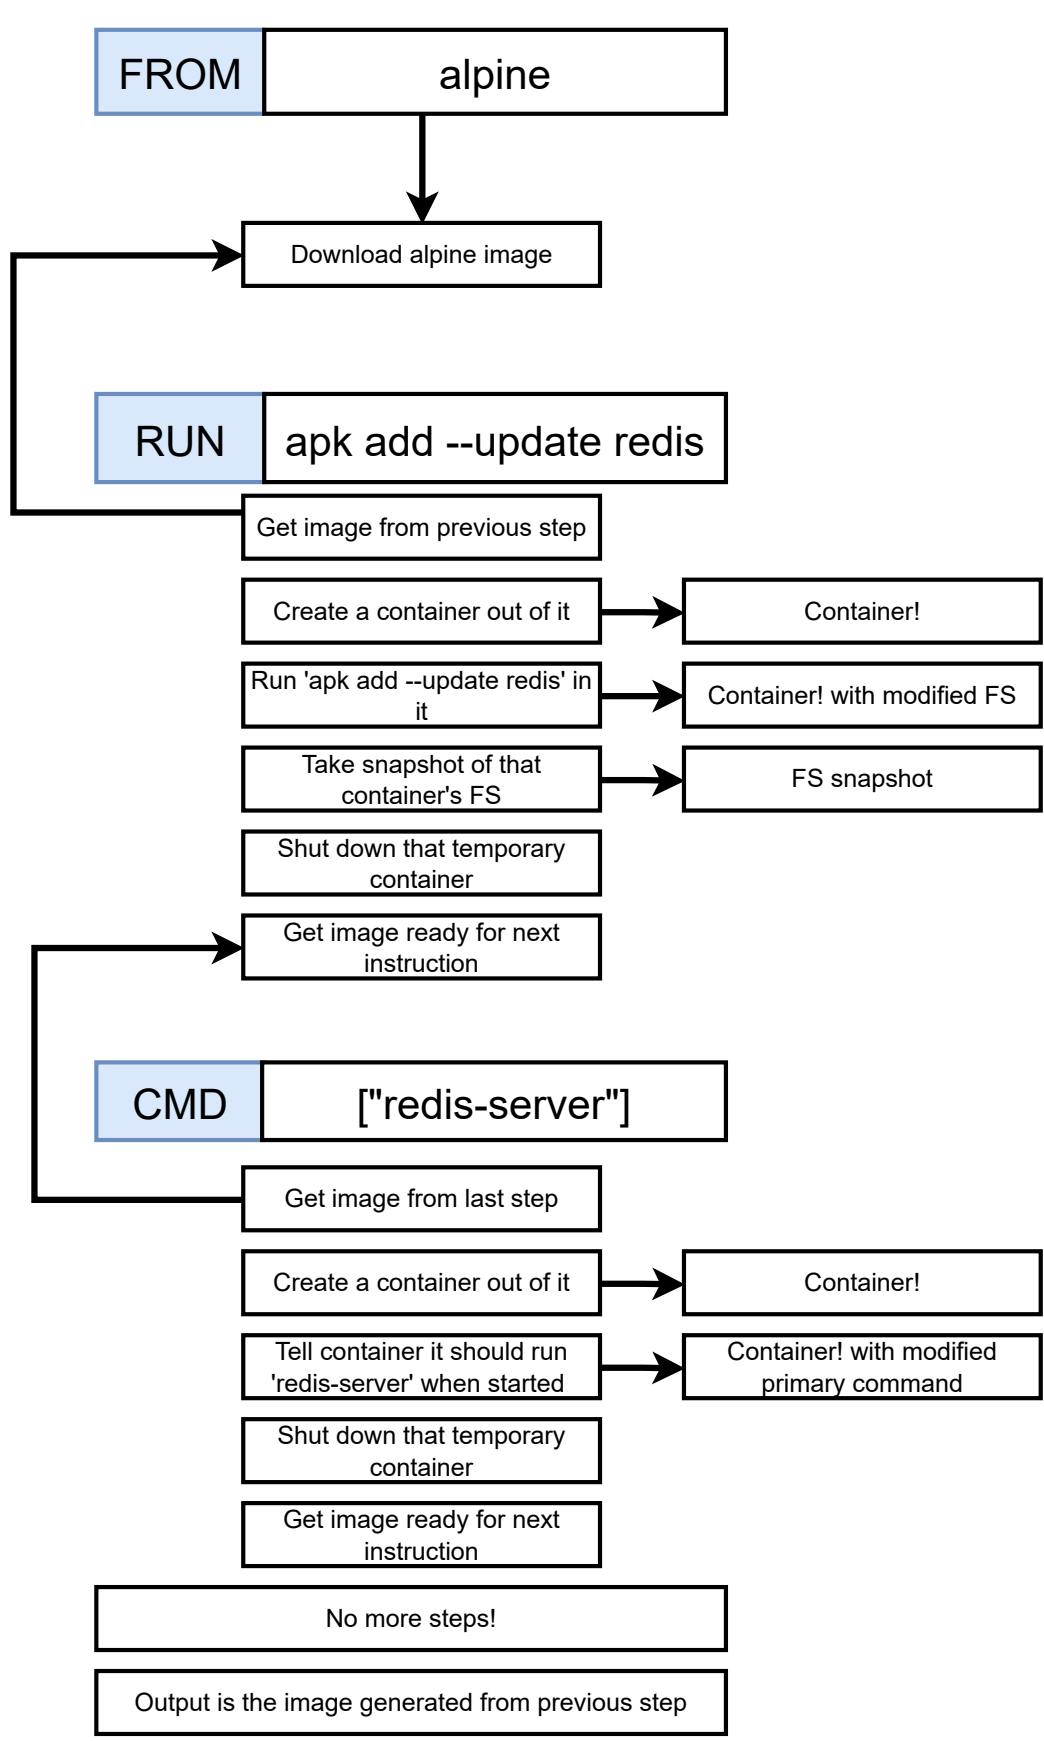

Tagging an Image

