





	ı	Try to create and run a container	1	Default command override
	docker	run	<image name=""/>	command!
Ţ	Reference the Docker Client	1	Name of image to use for this container	

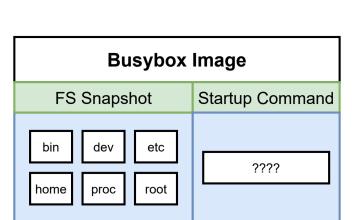


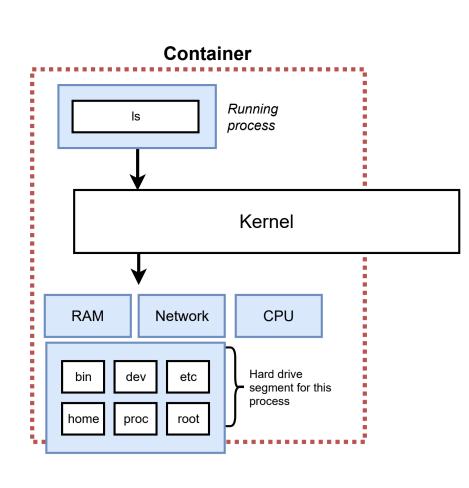


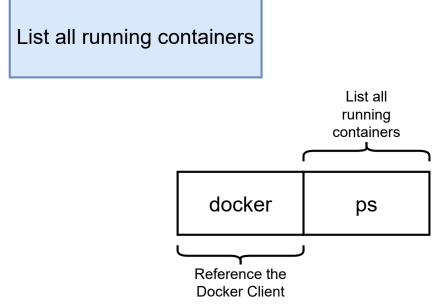


docker run = docker create + docker start

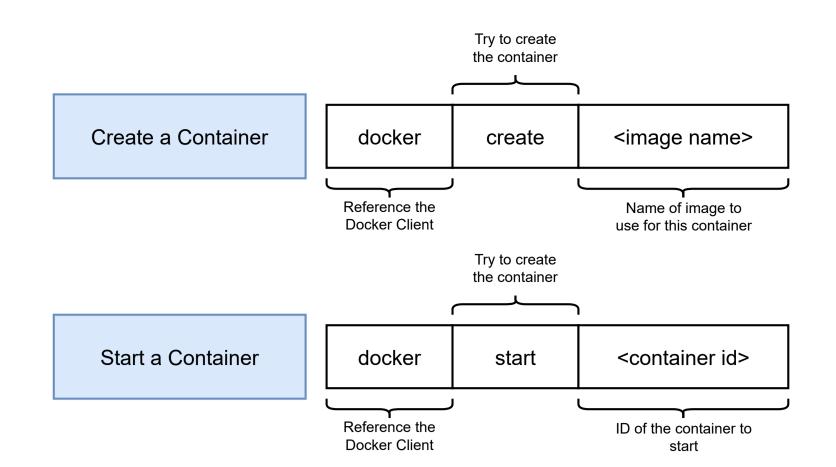

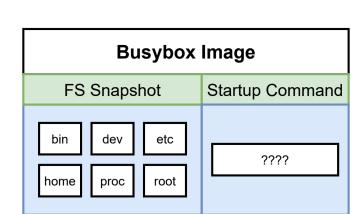

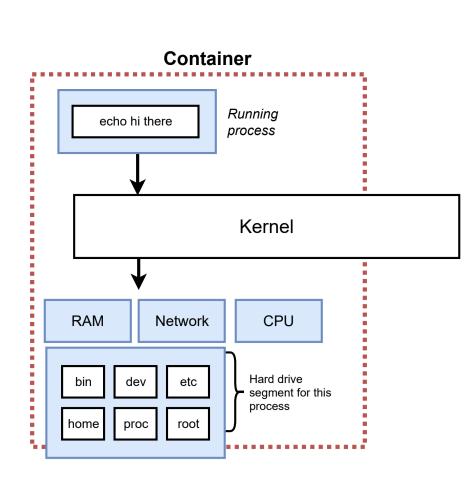



Get logs from a container

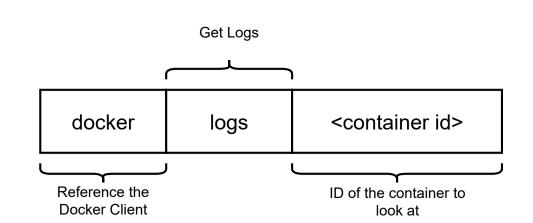


Stop a Container docker stop <container id>

Kill a Container docker kill <container id>

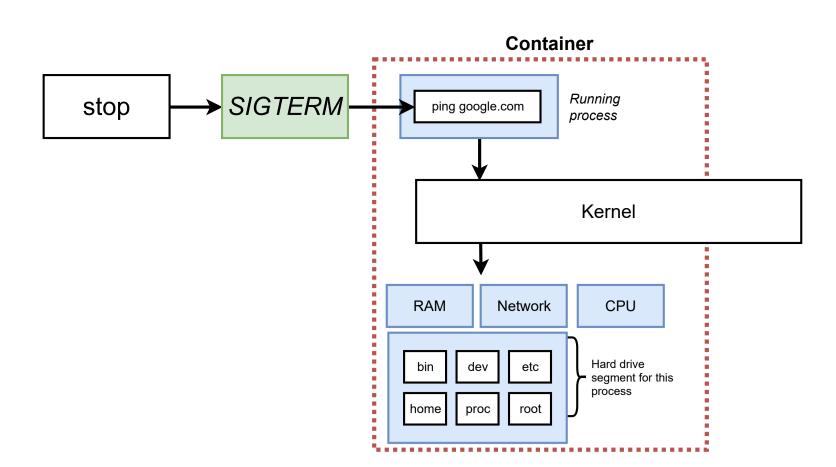

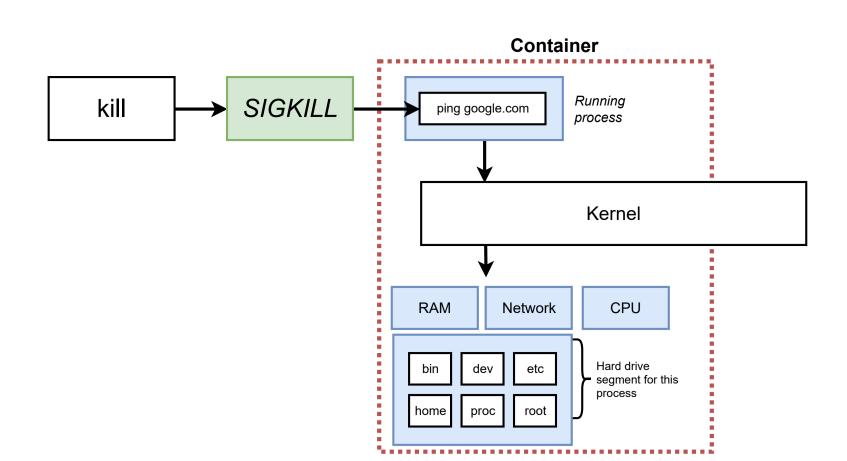



Execute an additional command in a container

Run another command		n r	ID of the container	1
docker	exec	-it	<container id=""></container>	<command/>
Reference the Docker Client	i	Allow us to provide input to the container		Command to

execute

