



# Sysible Controller — Illustrated Quick-Start

A screenshot and three steps for every screen. For the full reference, see [the complete guide](#).

|                                |                                              |
|--------------------------------|----------------------------------------------|
| The Dashboard                  | Network Management                           |
| Live Activity & Logs           | File System Management                       |
| My Sudo Password               | Storage Administration                       |
| Host Enrollment                | Firewall Administration                      |
| Sysible Connect                | Security Administration                      |
| The Terminal                   | Backup & Recovery                            |
| Graphical Desktop (RDP)        | Time Synchronization                         |
| User & Group Administration    | Certificate Management                       |
| System Health, Logs & Recovery | Containers & VMs                             |
| Service Management             | Directory Services (Active Directory / LDAP) |
| Environmental Policies         | Distro Subscription & Licensing              |
| Cron & Systemd Timers          | Sysible Controller Settings                  |
| Host Software Management       | Webserver Portal                             |
| Repository Management          |                                              |

Most tools share the same pattern: open the tool, check the hosts to act on in the **Target Hosts** list, then click an action — each host's result appears in its own tab with a green (success) or red (failure) banner.

## The Dashboard

**Sysible Controller Host Enrollment**

Download the agent bundle and manage the enrolled host fleet.

**Sysible Controller Settings**

Manage dashboard administrators, their password policy, the controller's address/port, and the audit log.

**Sysible Connect**

Pop-out SSH/agent terminals with file upload &amp; download, search, font sizing, and saved output, plus one-click SSH enrollment and environment tagging.

**Webserver Portal Configuration**

Run the host-facing portal for agent downloads and file transfers.

**System Administration**


User &amp; group administration and system health/log checks across agent and SSH hosts.

**Live Activity & Logs**

Live, attributed feed of who did what across the fleet, plus the controller's own log.

1. Log in; you land on the Dashboard — a search box over a column of tiles. The header shows who's signed in, a **Sudo Password** button, and a **Log Out** button.
2. Type a task like *create a user* or *open a firewall port* to jump straight to the right tool, or click a tile. (The **Live Activity & Logs** tile appears only for Superusers.)
3. Click **Sudo Password** to store your encrypted sudo password (needed for password-sudo hosts; any admin can do this). **Log Out** ends the session and returns to the login screen without stopping the controller.

## Live Activity & Logs (Superusers only)

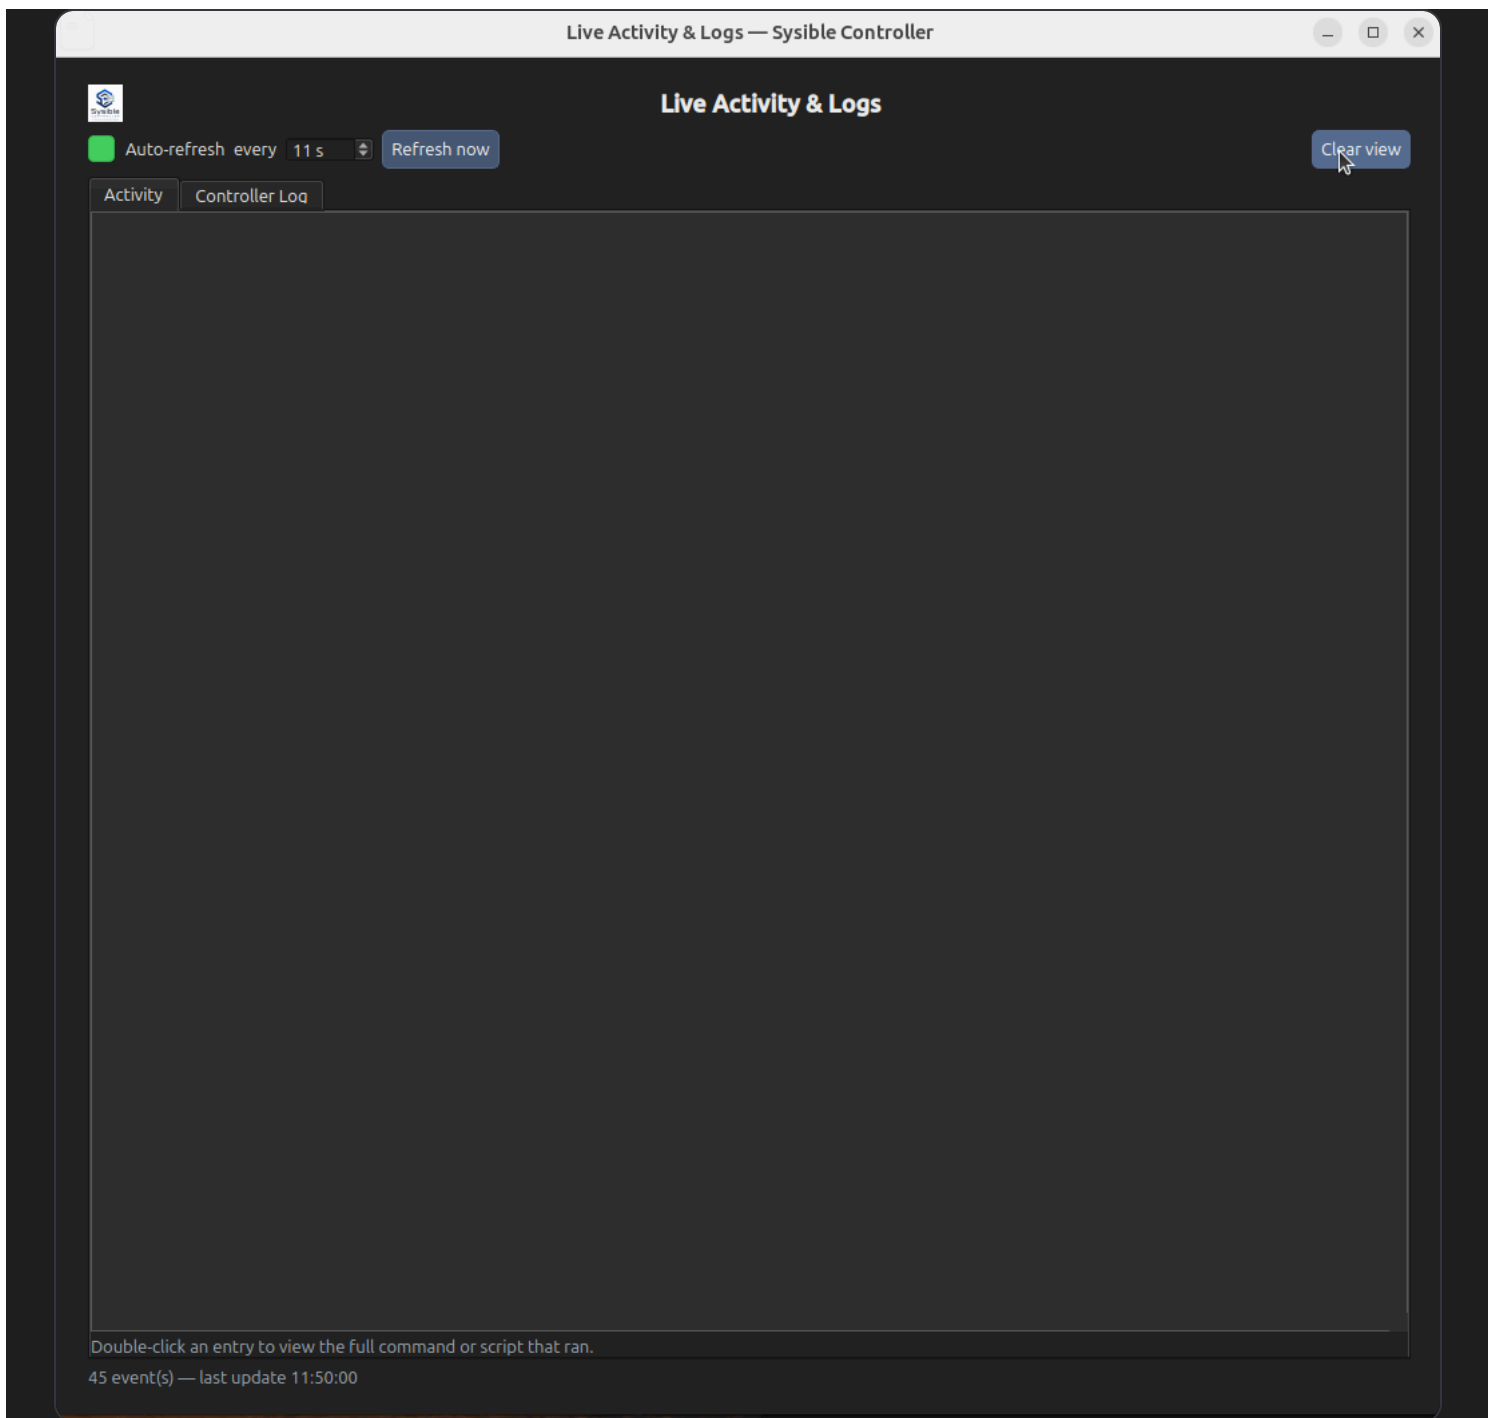

1. Open **Live Activity & Logs** from the Dashboard — visible only to Superuser administrators.
2. The **Activity** tab shows a live, plain-language feed of who did what; an action on several hosts is collapsed to one row ("... on 2 hosts: web-01, db-01"). The **Controller Log** tab tails the backend's own log.
3. **Double-click an entry** to pop out the full command/script that ran (with Copy). Both tabs auto-refresh; background syncs are filtered out.

## My Sudo Password



## My Sudo Password

Stored for **alice** and used to elevate commands on hosts whose sudo requires a password (and by the terminal's "Send sudo password" button). It's encrypted on this computer and never sent to the controller.

Applies to: All hosts (fleet default) ▼

✓ A sudo password is currently stored for this scope.

New password:

Confirm:

Show

Clear stored

Close

Save

1. Click **Sudo Password** in the dashboard header — available to every administrator (Superuser or Sysadmin).
2. Store your sudo password as the **fleet default** (all hosts) or pick a host for a per-host override; the dialog shows whether one is already stored.
3. It's encrypted on your own computer and never sent to the controller. It's what dispatched actions use to elevate on password-sudo hosts.

## Host Enrollment

Sysible Controller Host Enrollment — Sysible Controller



## Sysible Controller Host Enrollment

Community edition — 2/10 hosts used

### Agent Bundle

Same ready-to-run bundle the Webserver Portal hands out, built on demand here instead - useful when the portal isn't running. Each download bakes in a fresh, one-time enrollment token.

Download Agent Bundle

### Command-Line Bundle Download (curl)

For terminal-only or headless hosts that can't open a browser: downloads the agent bundle, unzips it, and runs the installer in one shot, authenticating with the Webserver Portal's login over HTTP Basic auth (curl -u). Needs the Webserver Portal running with credentials configured (see the Webserver Portal page). Replace <password> between the single quotes with the real portal password. -k skips the self-signed-cert check; the final install step needs sudo.

```
curl -k -sS -f -u 'admin:<password>' -o sysible-agent-bundle.zip "https://NetworkController:8090/cli/bundle" && unzip -o sysible-agent-bundle.zip -d sysible-agent-bundle && cd sysible-agent-bundle && chmod +x run_agent.sh && sudo ./run_agent.sh
```

Copy to Clipboard

### Enrolled Hosts (grouped by environment)

Collapse All

Expand All

▼ DEV

dev1

dev2

Environment: Dev Set Environment

Sudo policy (selected host / environment)

Selected host(s): Requires Password Passwordless (NOPASSWD)


Environment 'Dev' default: requires sudo password Set Environment's Sudo Default...

For password-sudo hosts, store your own sudo password from the "Sudo Password" button in the dashboard header.

Refresh Disenroll Host

1. Open **Sysible Controller Host Enrollment** from the Dashboard.
2. Click **Download Agent Bundle** and install it on the target host — or copy the **curl one-liner** to install on a headless host. (A machine already managed at that IP can't be enrolled twice.)
3. Enrolled hosts appear in the list; **shift/ctrl-click several at once** to **Set Environment** in bulk, set the **Sudo policy** (NOPASSWD or password-required) per host or environment, or **Disenroll Host**. Your own sudo password goes on the header's **Sudo Password** button.

## Sysible Connect

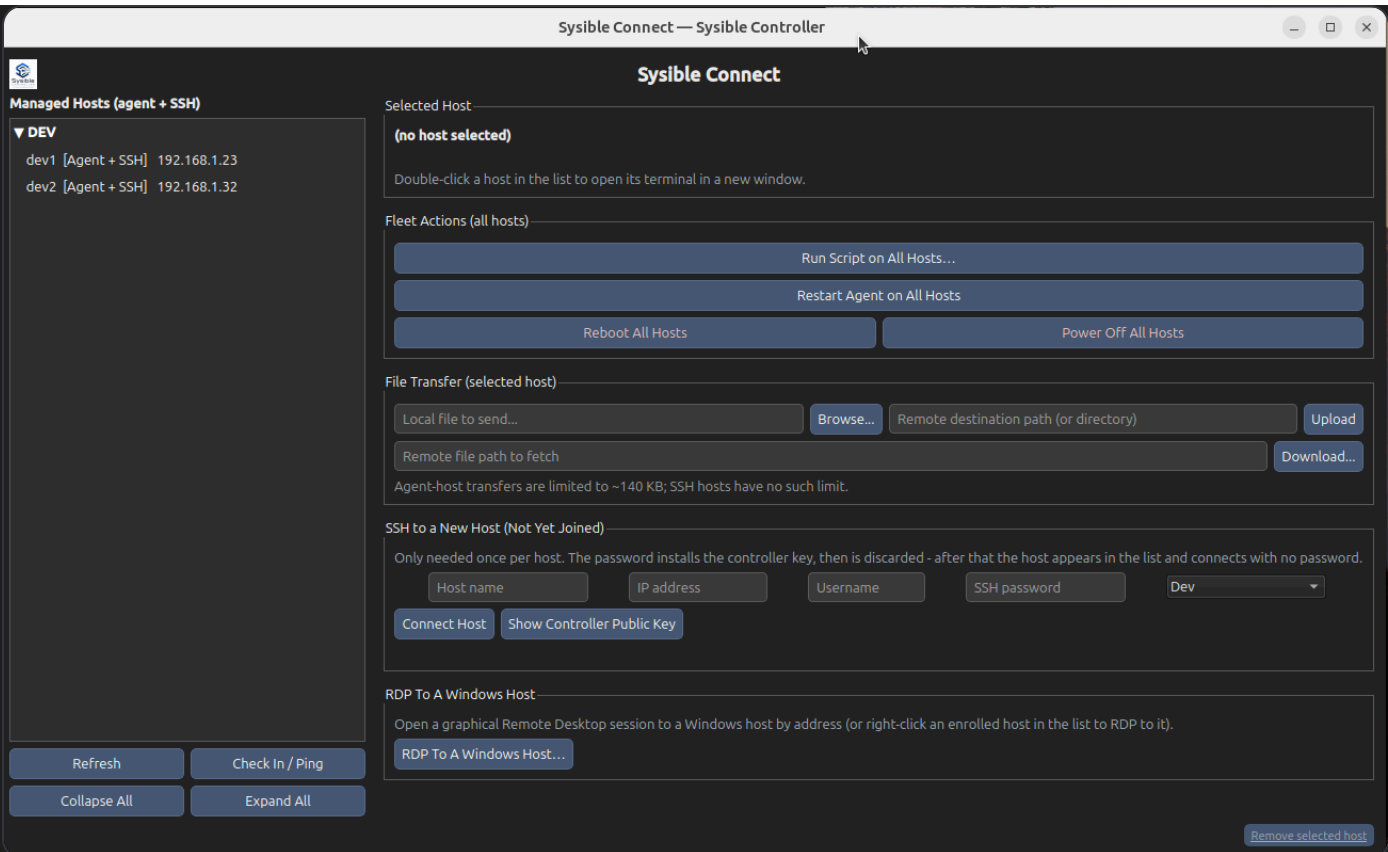

1. Open **Sysible Connect**. The left is just the host list (agent + SSH, deduped by IP, each with its controls below it); the actions are grouped on the right.
2. **Double-click a host** to open a pop-out terminal (runs as **your admin user**, not root). In the terminal, **Send sudo password** answers a sudo prompt from your encrypted store.
3. The right panel groups **Fleet Actions** (Run Script / Reboot / Power Off / Restart Agent on all hosts), file transfer, **SSH to a New Host** (Connect Host — password used once, then replaced by a key), and **RDP To A Windows Host**....

## The Terminal

```
root@db-01 — Sysible Connect

Upload... Download... Find... Save Output... A- A+

root@db-01:~# systemctl status nginx
● nginx.service - A high performance web server
   Loaded: loaded (/lib/systemd/system/nginx.service; enabled)
   Active: active (running) since Mon 2026-06-22 09:14:03 UTC
   Main PID: 1182 (nginx)

root@db-01:~# df -h /
Filesystem      Size  Used Avail Use% Mounted on
/dev/vda1        40G   18G   21G   47% /

root@db-01:~# vim /etc/nginx/nginx.conf
root@db-01:~# _
```


1. Each terminal is a real PTY — `vim`, `top`, and `less` render correctly.
2. The `user@host` prompt is green (red for root); the toolbar adds upload/download, find, save-output, and font sizing.
3. Open as many terminals as you like — sessions are independent, even multiple to the same host.

## RDP To A Windows Host

The screenshot shows the Sysible Connect web interface. On the left, a sidebar lists 'Managed Hosts (agent + SSH)' with two entries: 'dev1 [Agent + SSH] 192.168.1.23' and 'dev2 [Agent + SSH] 192.168.1.32'. The main panel is titled 'Sysible Connect' and shows a 'Selected Host' section with '(no host selected)'. Below this is a 'Fleet Actions (all hosts)' section with buttons for 'Run Script on All Hosts...', 'Power Off All Hosts', and 'Power On All Hosts'. A 'File Transfer (selected host)' section has buttons for 'Local file to selected host', 'Remote file path to selected host', and 'Agent-host transfer'. An 'SSH to a New Host' section has a 'Connect Host' button and a 'Show Controller Public Key' button. An 'Open RDP Session — Sysible Co...' dialog box is open in the center, with fields for 'Host / address:', 'Username:', 'Domain:', 'Password:', and 'Display:'. The 'Password:' field has a hint 'leave blank to be prompted by the client'. The 'Display:' field has a dropdown menu with 'Dynamic / resizable (recommended)' selected. There are 'Cancel' and 'Connect' buttons at the bottom of the dialog. At the bottom of the main panel, there is an 'RDP To A Windows Host' section with a button 'RDP To A Windows Host...' and a 'Remove selected host' button.

1. In **Sysible Connect**, click **RDP To A Windows Host...** (or right-click an enrolled host). The target must run an RDP server — Windows Remote Desktop, or `xrdp` on Linux.
2. Enter host, username, password, and resolution (the default fits the window).
3. Optionally **remember credentials** — encrypted on your workstation. Click **Connect** to launch FreeRDP (or Remmina); a failure shows the real reason instead of just closing.


## User & Group Administration

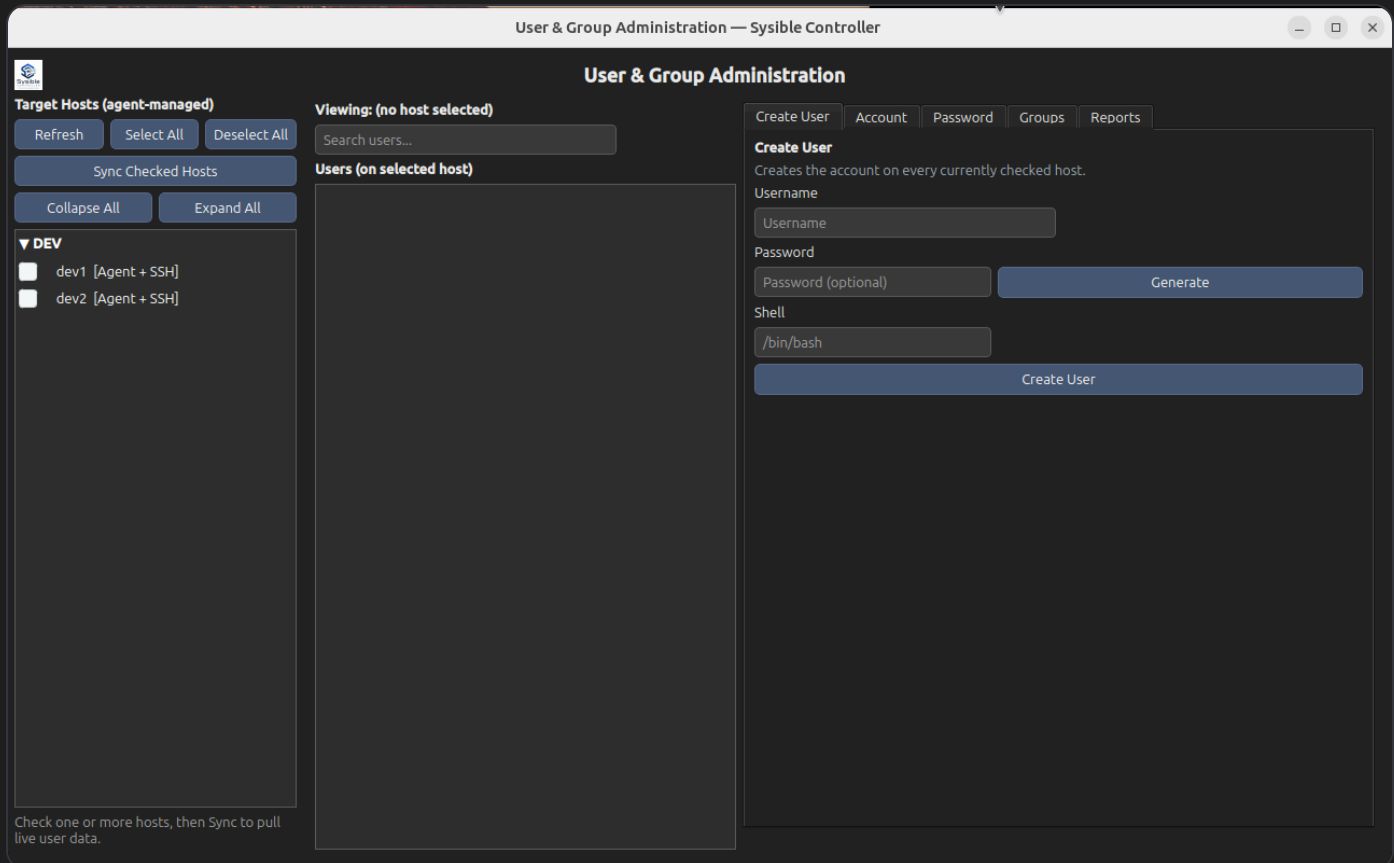

1. Open **System Administration** → **User & Group Administration**.
2. Check one or more hosts in the **Target Hosts** list (use **Select All** for the whole fleet).
3. Use the **Create User** / **Account** / **Password** / **Groups** tabs and click an action (e.g. **Create User**, **Lock**, **Toggle Sudo**). Each host's result opens in its own tab.


## System Health, Logs & Recovery



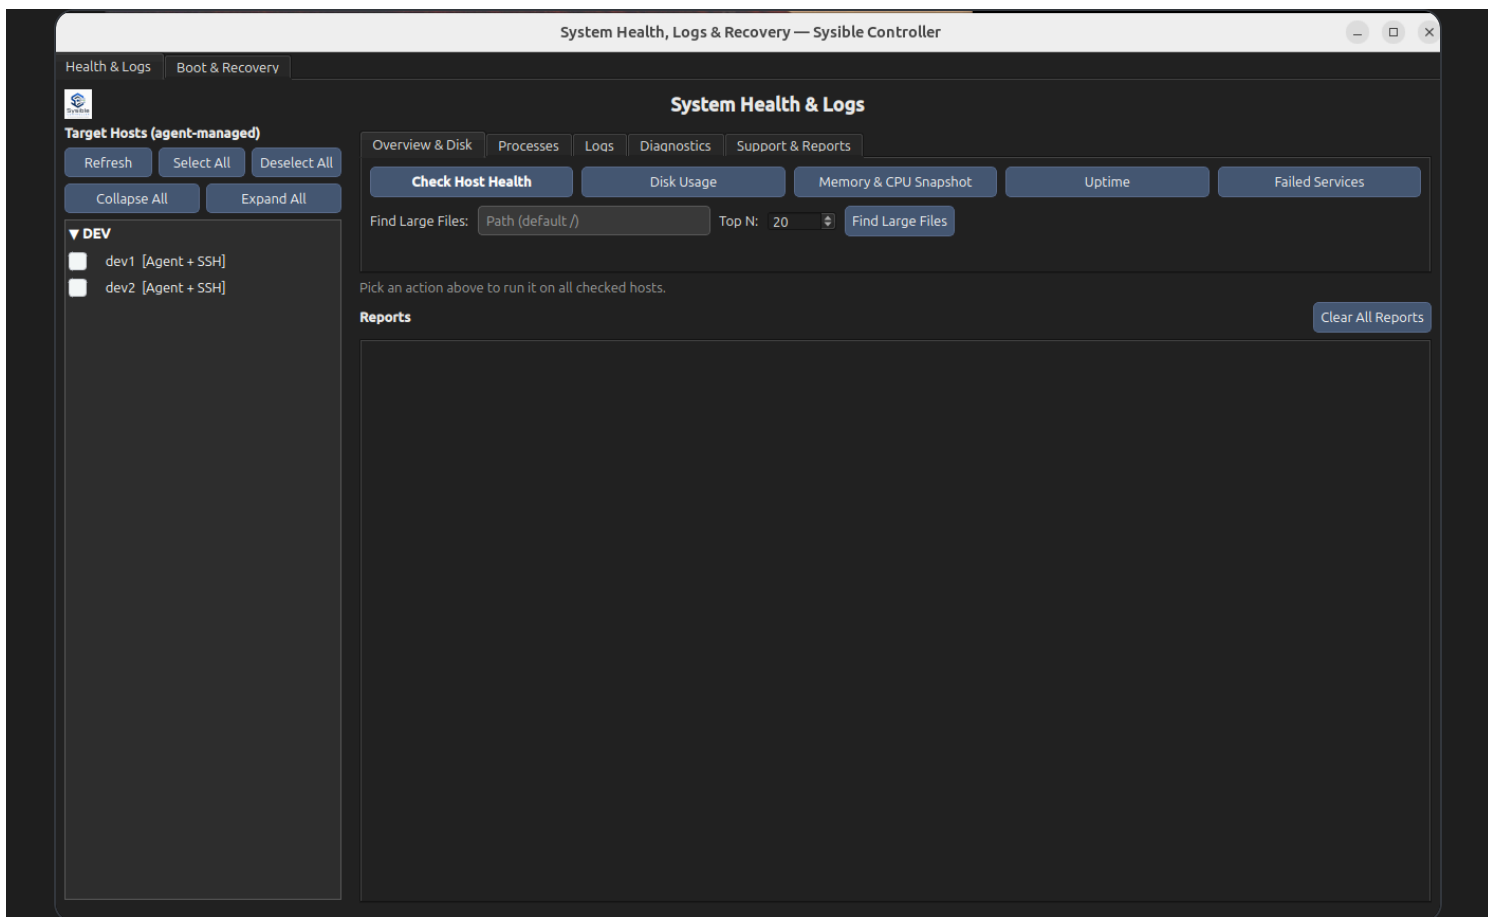


1. Open **System Administration** → **System Health, Logs & Recovery** (one window, two top-level tabs: **Health & Logs** and **Boot & Recovery**).
2. Check one or more hosts in the **Target Hosts** list (use **Select All** for the whole fleet).
3. On **Health & Logs**, click **Check Host Health** for a green/amber/red verdict, or use the **Overview/Processes/Logs/Diagnostics** tabs. On **Boot & Recovery**, analyze boot failures, manage GRUB and kernels — with care.

## Service Management

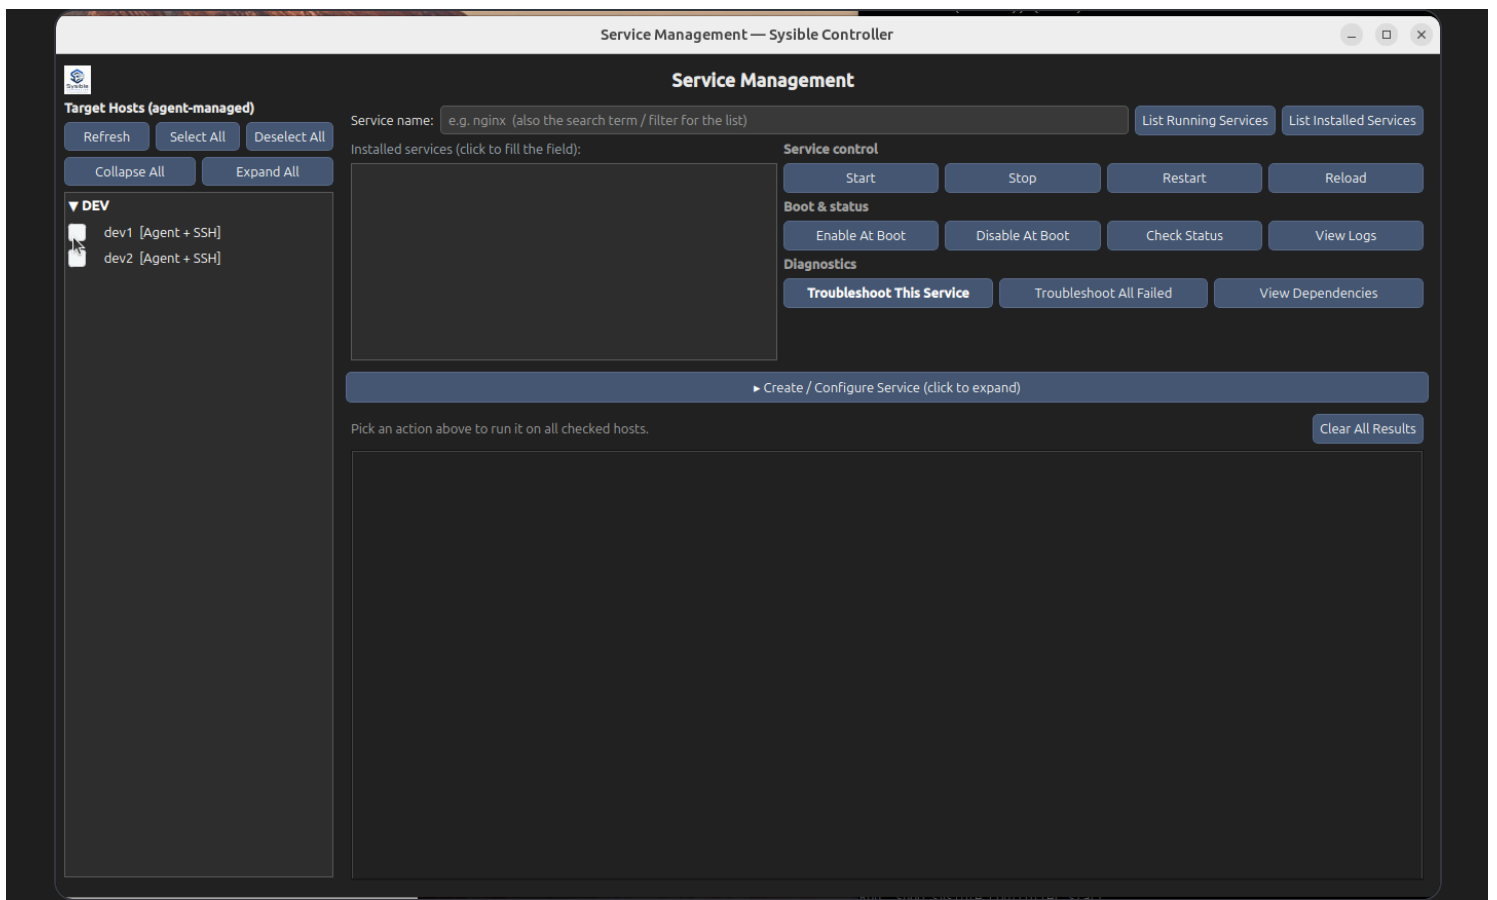


1. Open **System Administration** → **Service Management**.
2. Check one or more hosts in the **Target Hosts** list (use **Select All** for the whole fleet).
3. Type a service name and click **Start**, **Stop**, **Restart**, **Enable At Boot**, **Status**, or **Logs**; **Troubleshoot** diagnoses failures.

## Environmental Policies

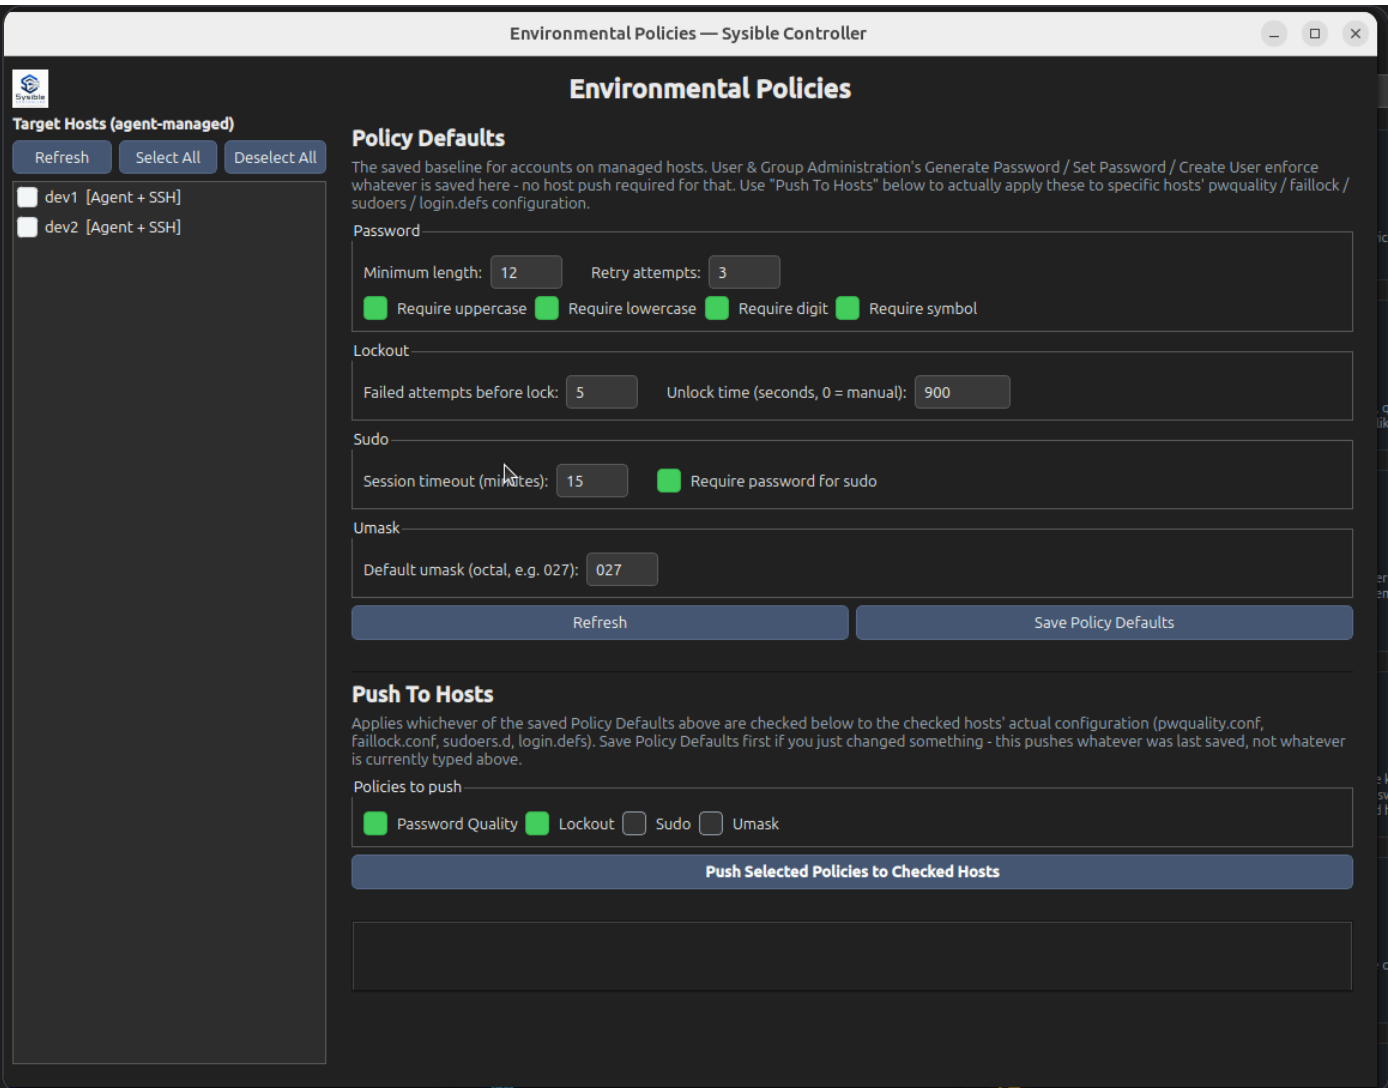


1. Open **System Administration** → **Environmental Policies**.
2. Check one or more hosts in the **Target Hosts** list (use Select All for the whole fleet).
3. Set the password, lockout, sudo, and umask baseline, then click **Push Selected Policies to Checked Hosts**.

## Cron & Systemd Timers

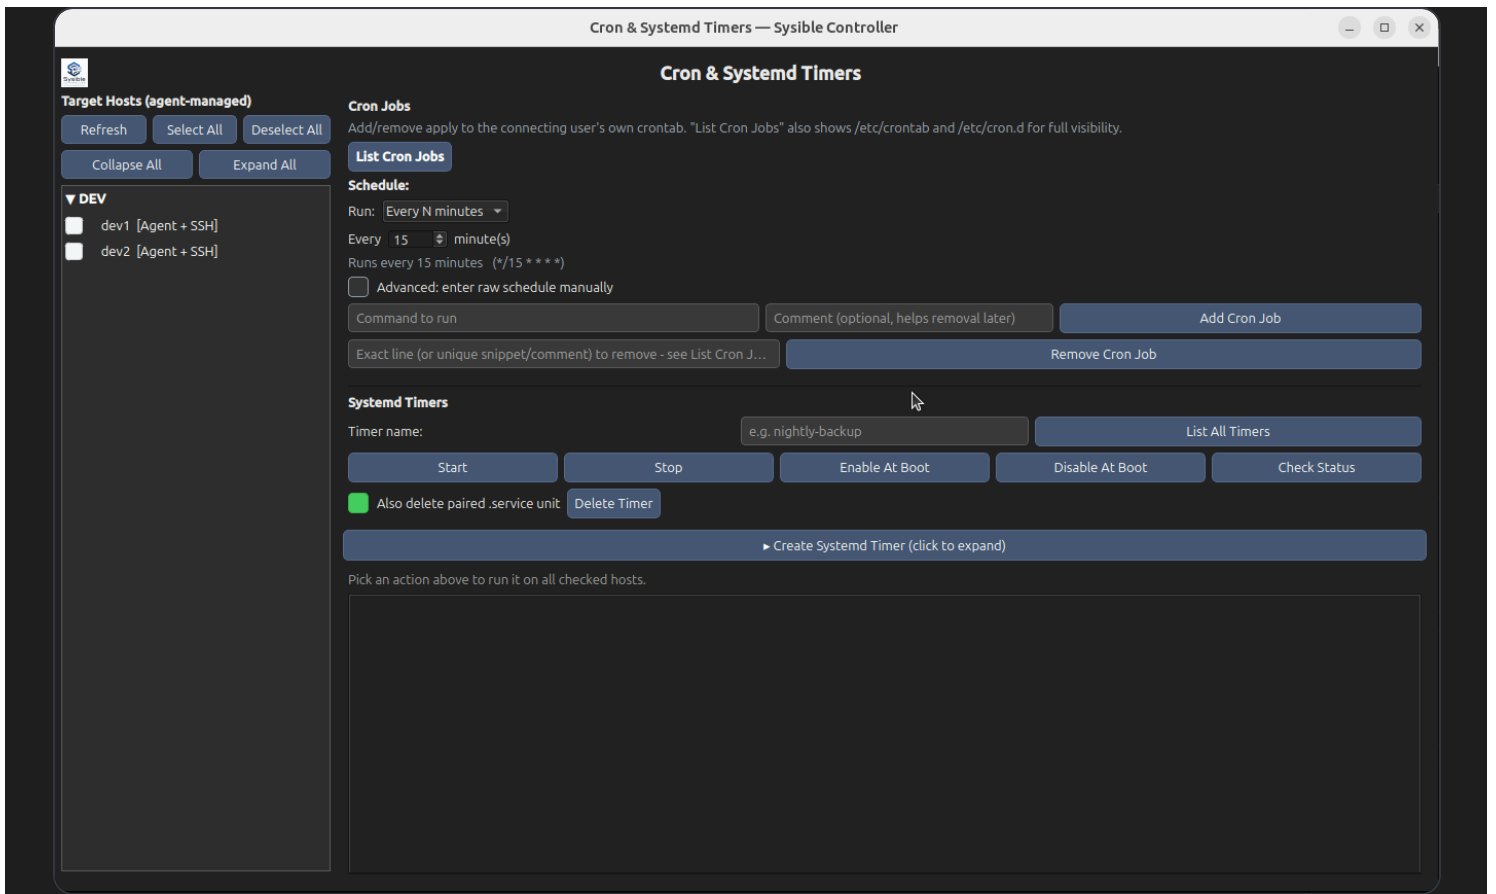


1. Open **System Administration** → **Cron & Systemd Timers**.
2. Check one or more hosts in the **Target Hosts** list (use **Select All** for the whole fleet).
3. Use **List Cron Jobs** / **Add Cron Job** (the schedule builder writes the syntax for you), or manage timers with **Create Timer**, **Start**, **Enable At Boot**.

## Host Software Management

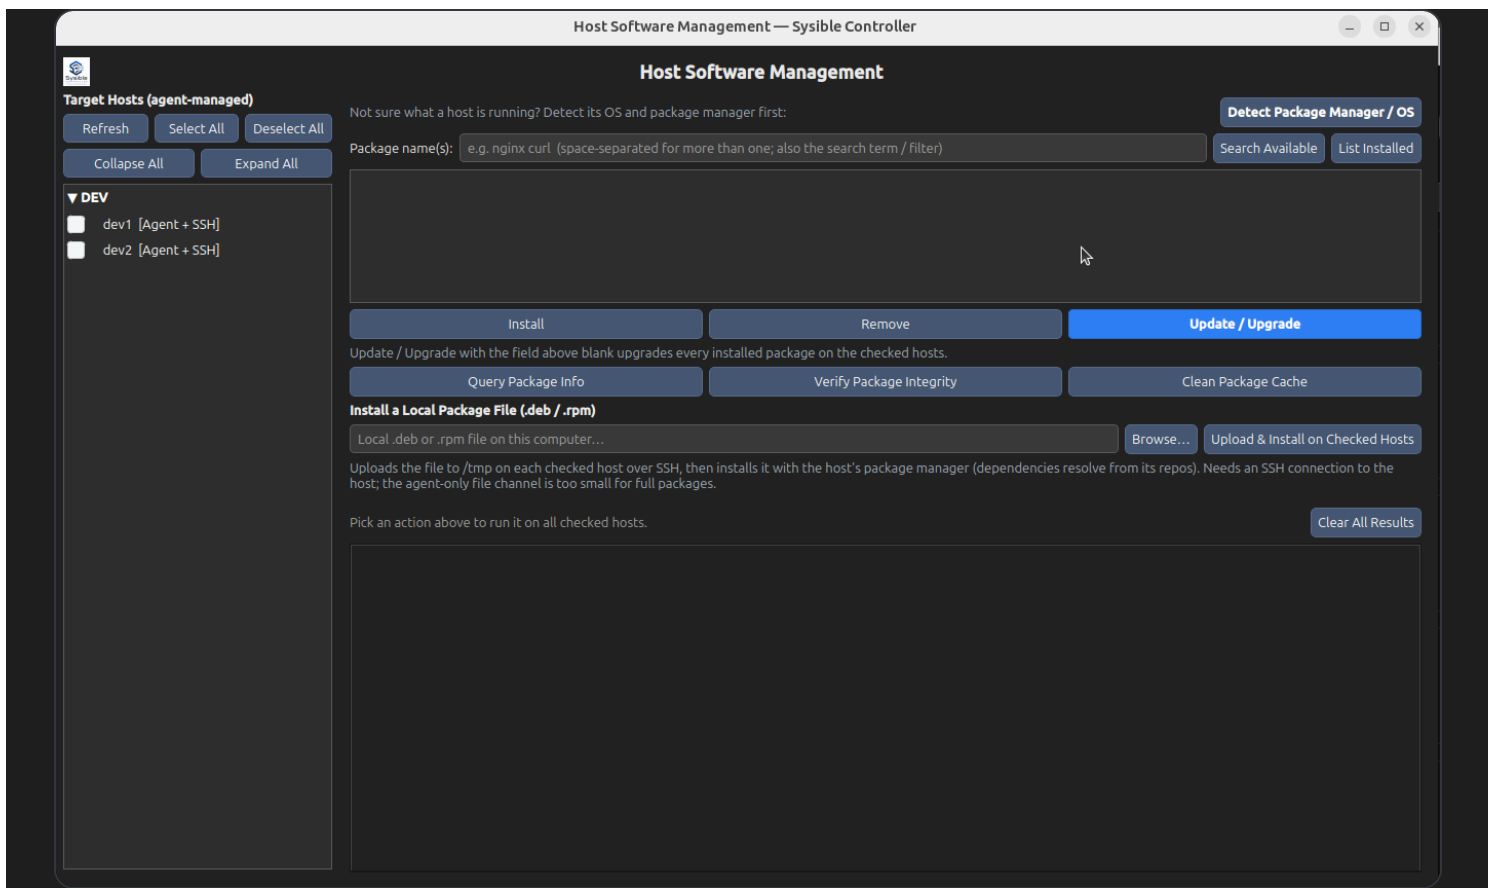


1. Open **System Administration** → **Host Software Management**.
2. Check one or more hosts in the **Target Hosts** list (use **Select All** for the whole fleet).
3. Click **Detect Package Manager / OS**, then **Install**, **Remove**, **Update / Upgrade**, or **Query Package Info** — the same buttons work across apt/dnf/yum/zypper.

## Repository Management

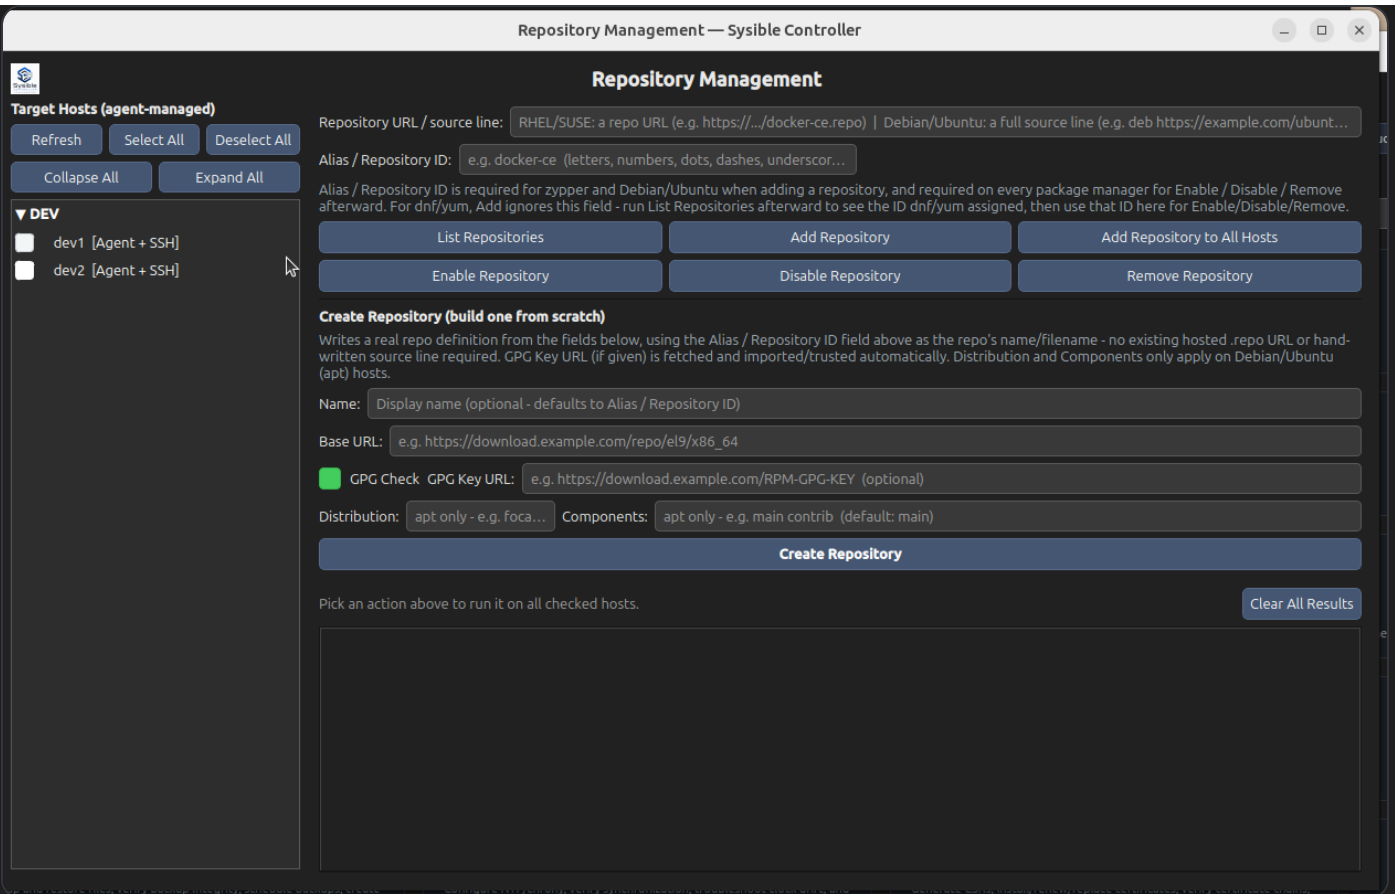


1. Open **System Administration** → **Repository Management**.
2. Check one or more hosts in the **Target Hosts** list (use **Select All** for the whole fleet).
3. Click **List Repositories**, then **Add Repository** (or **Add Repository to All Hosts**), **Enable**, **Disable**, or **Remove Repository**.

## Network Management

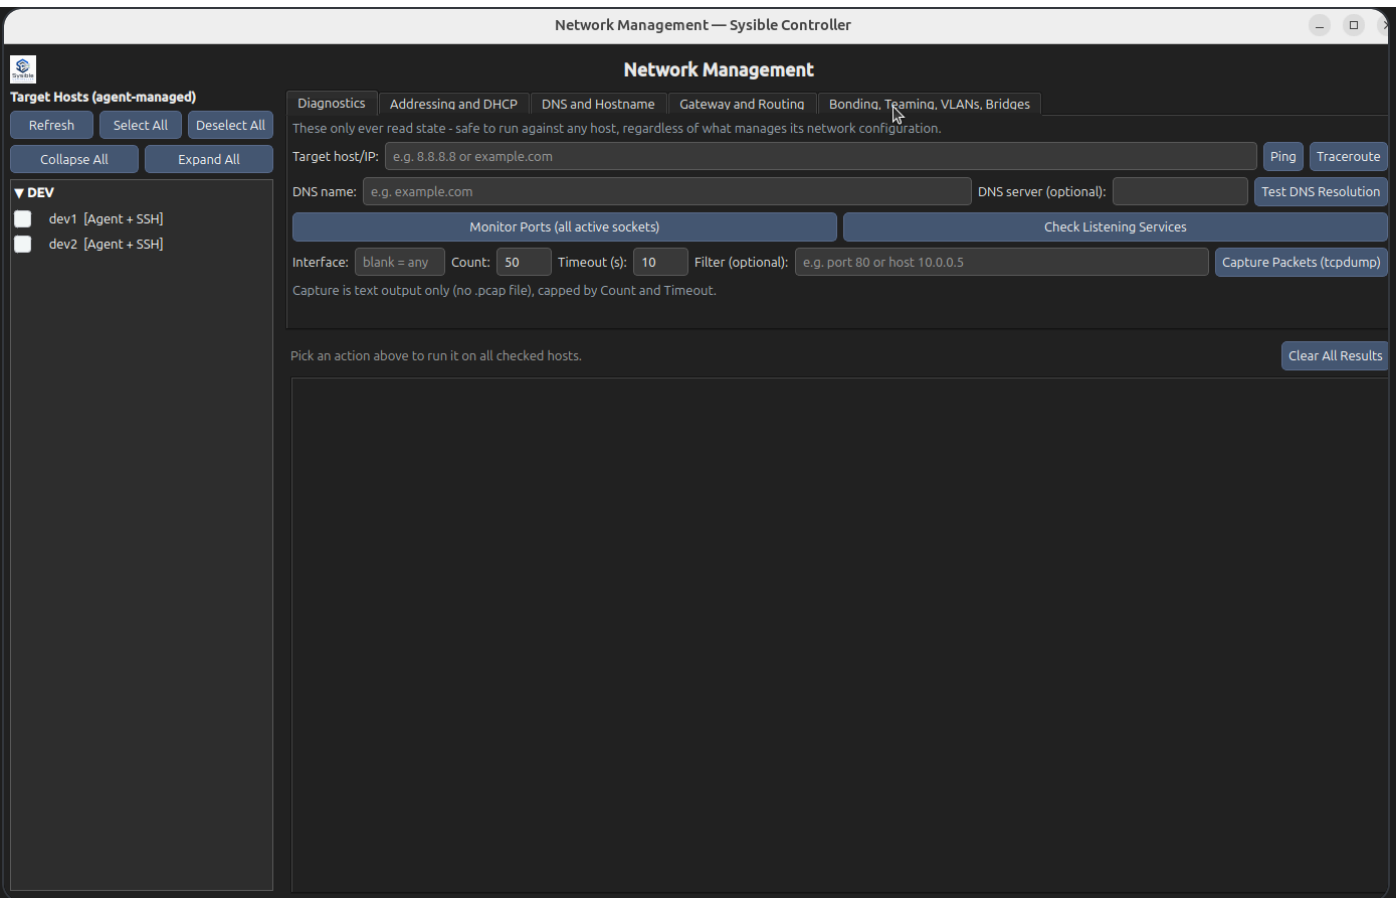

1. Open **System Administration** → **Network Management**.
2. Check one or more hosts in the **Target Hosts** list (use Select All for the whole fleet).
3. Start in **Diagnostics** (**Ping**, **Traceroute**, **Test DNS Resolution**); use the other tabs to configure addressing, DNS, routing, and bonds/VLANs/bridges.


## File System Management

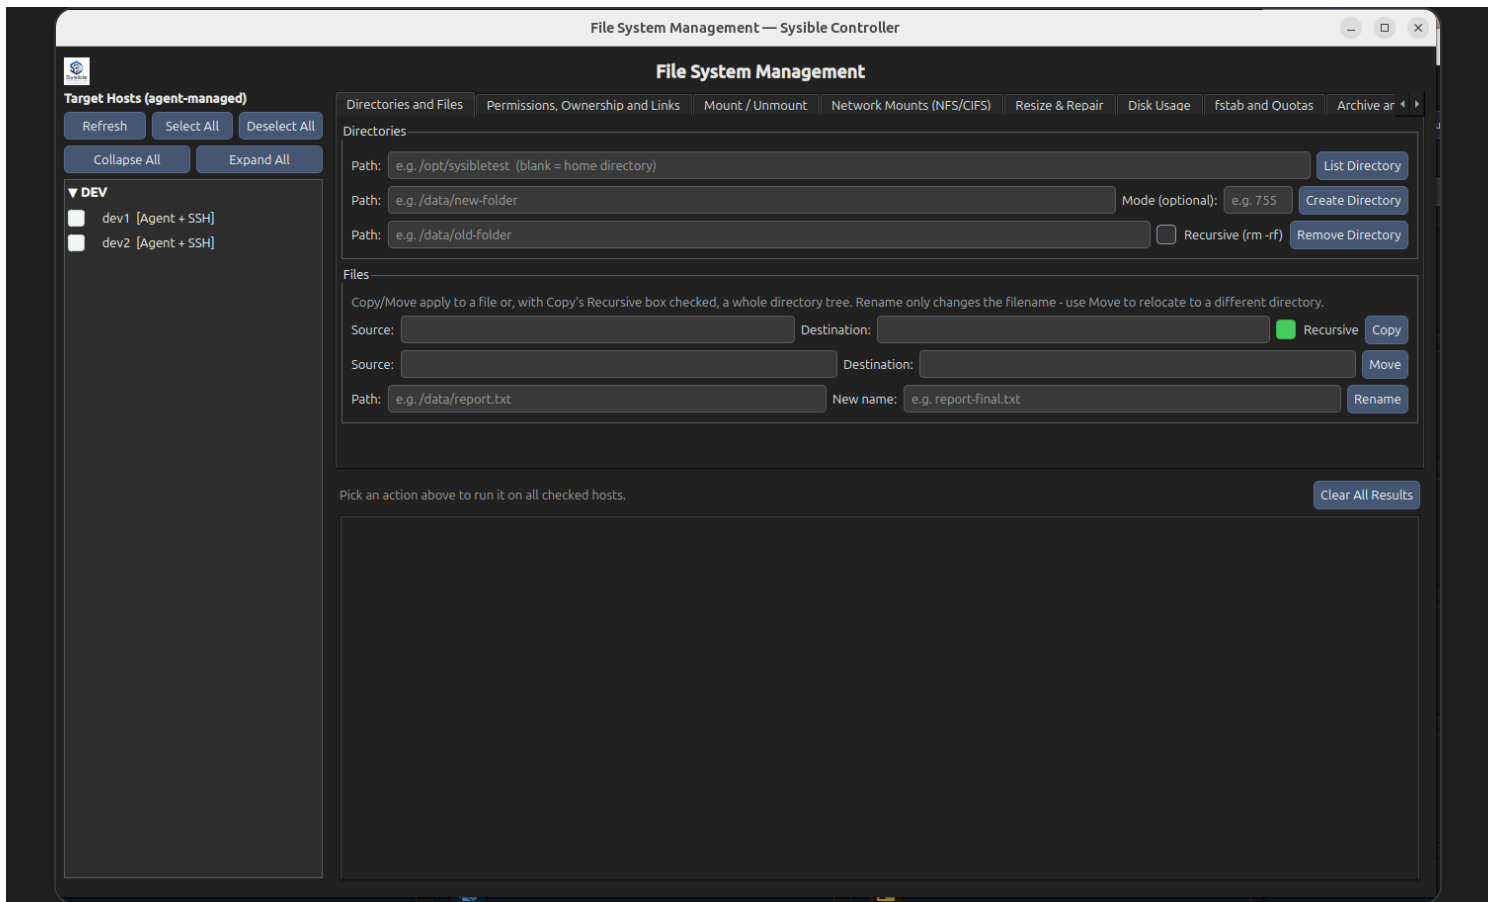

1. Open **System Administration** → **File System Management**.
2. Check one or more hosts in the **Target Hosts** list (use **Select All** for the whole fleet).
3. Start in **Directories and Files** — **List Directory** shows a path's contents; then create/copy/move/rename. Separate tabs cover permissions/links, **Mount / Unmount**, **Network Mounts (NFS/CIFS)**, **Resize & Repair**, **Disk Usage**, **fstab/quotas**, and archives.


## Storage Administration



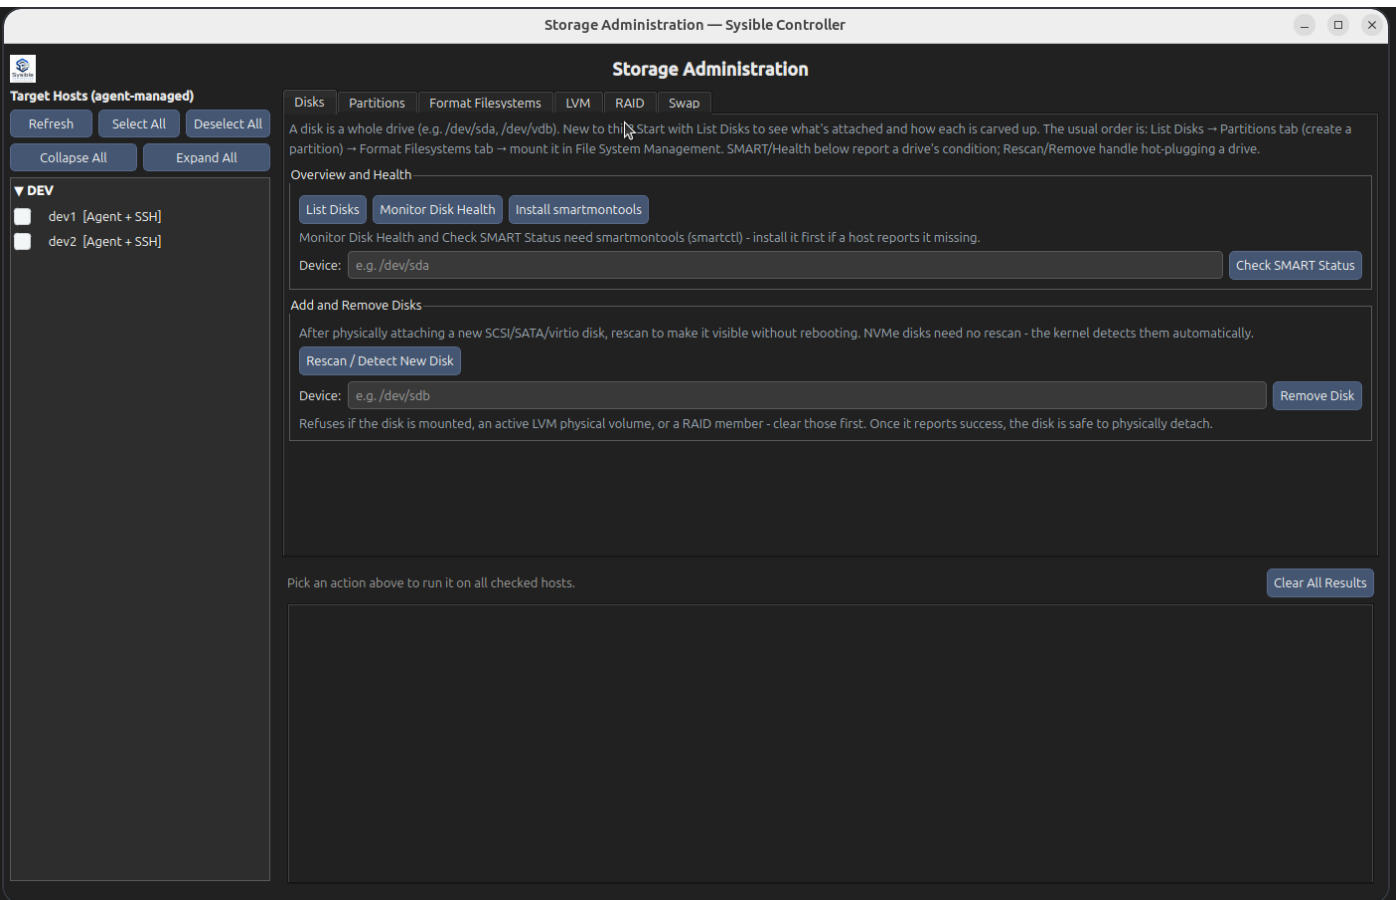

1. Open **System Administration** → **Storage Administration**.
2. Check one or more hosts in the **Target Hosts** list (use Select All for the whole fleet).
3. Work through the tabs: **Disks** (and SMART), **Partitions**, **Format**, **LVM**, **RAID**, **Swap**. Enter a device like `/dev/sdb` and click the action.

## Firewall Administration

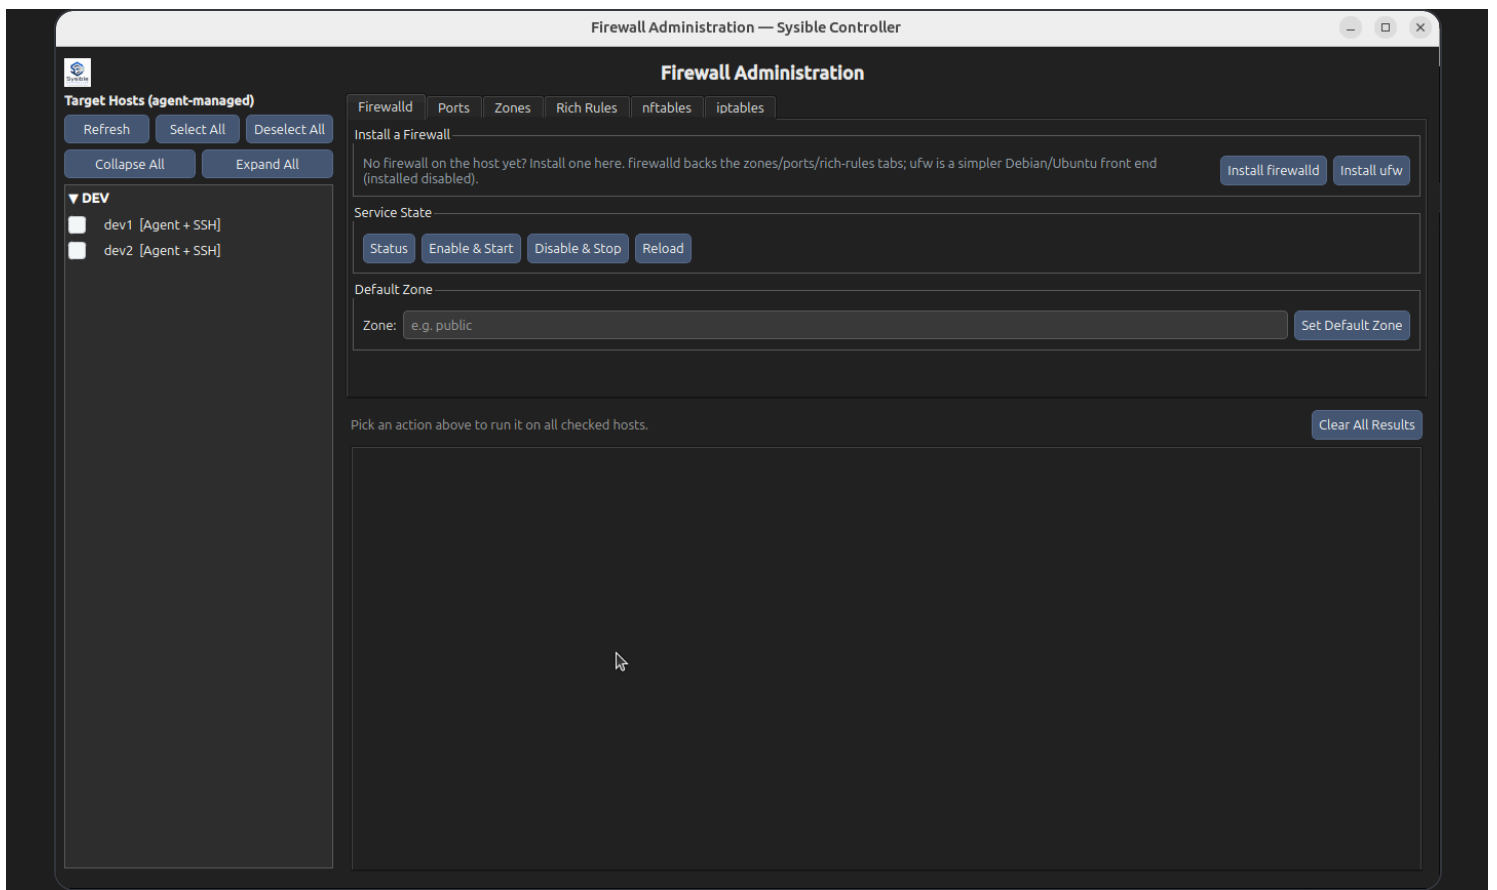

1. Open **System Administration** → **Firewall Administration**.
2. Check one or more hosts in the **Target Hosts** list (use Select All for the whole fleet).
3. Use **Firewalld/Ports** to **Open Port / Close Port** and **Reload**; **Zones**, **Rich Rules**, and raw **nftables/iptables** tabs are there for advanced rules.

## Security Administration

The screenshot shows the 'Security Administration' window in Sysible Controller. The 'SELinux' tab is active. On the left, under 'Target Hosts (agent-managed)', there are buttons for 'Refresh', 'Select All', 'Deselect All', 'Collapse All', and 'Expand All'. Below these, a list of hosts is shown under the 'DEV' group: 'dev1 [Agent + SSH]' and 'dev2 [Agent + SSH]'. The main panel contains several sections: 'Mode' with 'Runtime mode' and 'Persistent mode' both set to 'enforcing'; 'Booleans' with a filter 'e.g. httpd' and a list of booleans including 'e.g. httpd\_can\_network\_connect'; 'Denials' with a 'Lines' dropdown set to '50'; 'File Contexts' with a path filter 'e.g. /var/www/html'; and 'Policies' with a filter, path spec, and SELinux type. At the bottom, there is a 'Clear All Results' button.

1. Open **System Administration** → **Security Administration**.
2. Check one or more hosts in the **Target Hosts** list (use Select All for the whole fleet).
3. Tabs: **SELinux**, **SSH** (harden + rotate keys), **Audit & Logins**, **Updates & Policy**, and **Hardening & Scans** (Lynis/rkhunter).

## Backup & Recovery



**Target Hosts (agent-managed)**

Refresh

Select All

Deselect All

Collapse All

Expand All

▼ DEV

☐ dev1 [Agent + SSH]

☐ dev2 [Agent + SSH]

Files

Snapshots

Schedule & DR

Back Up Files

Source path:  Destination dir: 

Back Up

Creates a timestamped .tar.gz of the source under the destination directory.

Restore Files

Archive:  Restore into: 

Restore

Verify Backup Integrity

Archive: 


Verify

Pick an action above to run it on all checked hosts.

Clear All Results


1. Open **System Administration** → **Backup & Recovery**.
2. Check one or more hosts in the **Target Hosts** list (use **Select All** for the whole fleet).
3. Set a source and destination and click **Back Up**, then **Verify** or **Restore**; the other tabs cover LVM snapshots and scheduled/DR drills.

## Time Synchronization

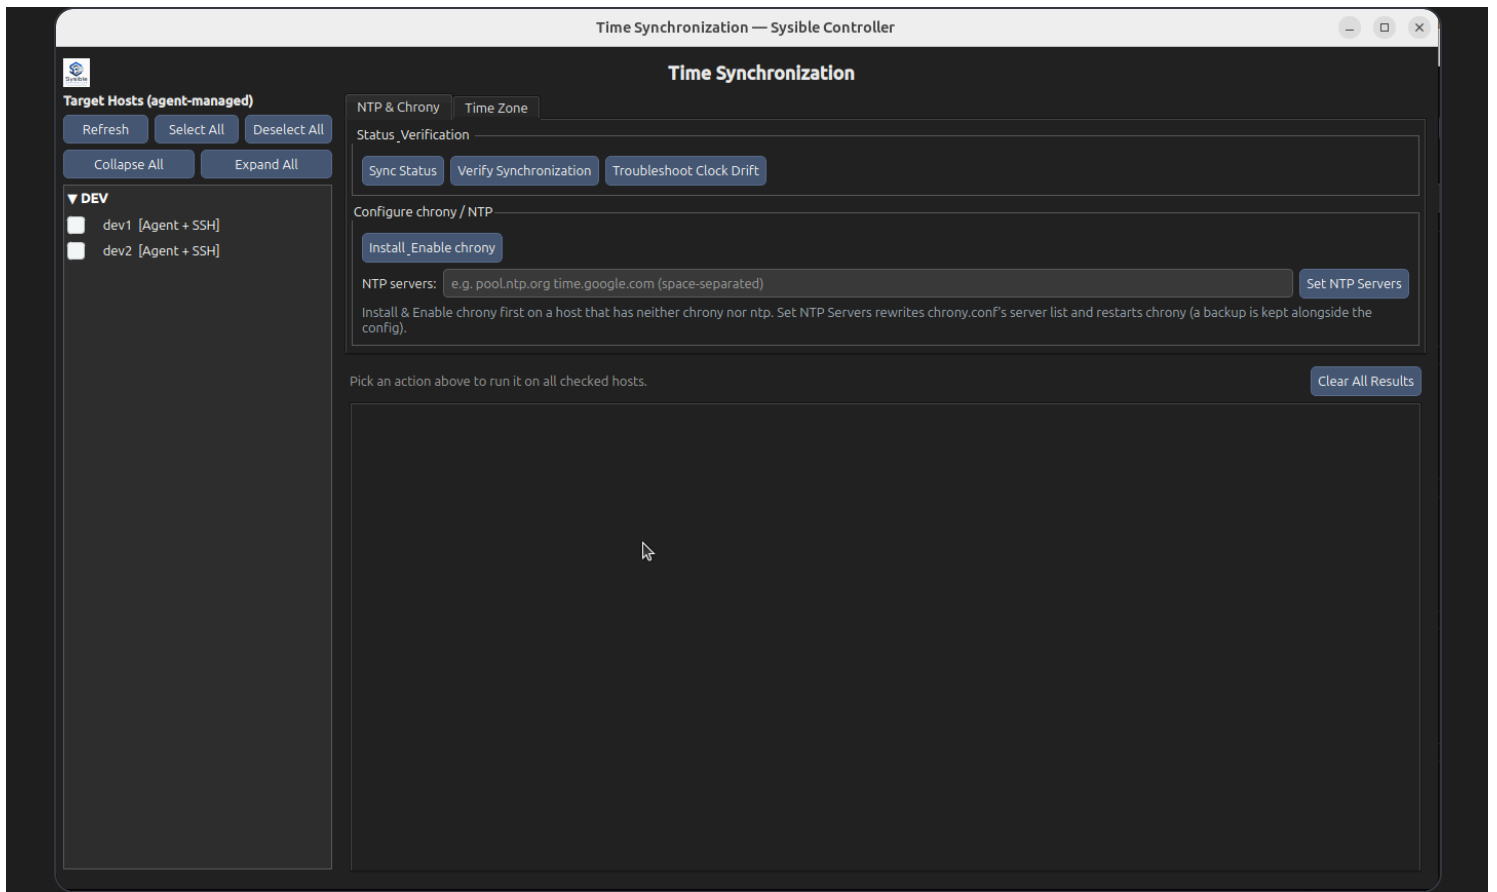


1. Open **System Administration** → **Time Synchronization**.
2. Check one or more hosts in the **Target Hosts** list (use **Select All** for the whole fleet).
3. Click **Sync Status** / **Verify Synchronization**, then **Set NTP Servers** or **Set Time Zone** as needed.

## Certificate Management

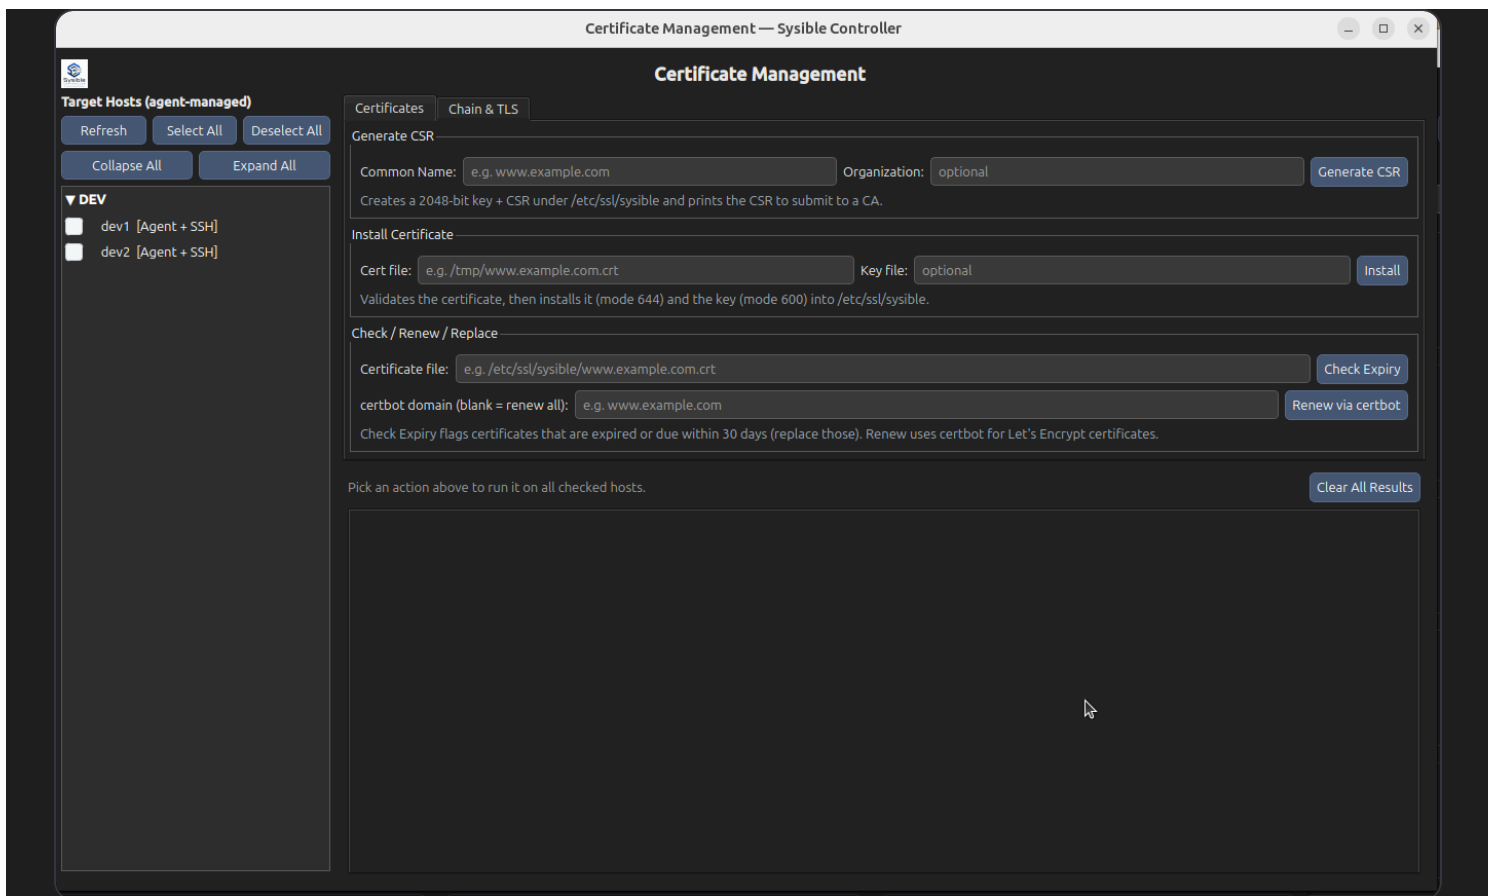


1. Open **System Administration** → **Certificate Management**.
2. Check one or more hosts in the **Target Hosts** list (use **Select All** for the whole fleet).
3. Click **Generate CSR**, **Install**, or **Check Expiry**; the **Chain & TLS** tab verifies chains and troubleshoots endpoints.

## Containers & VMs

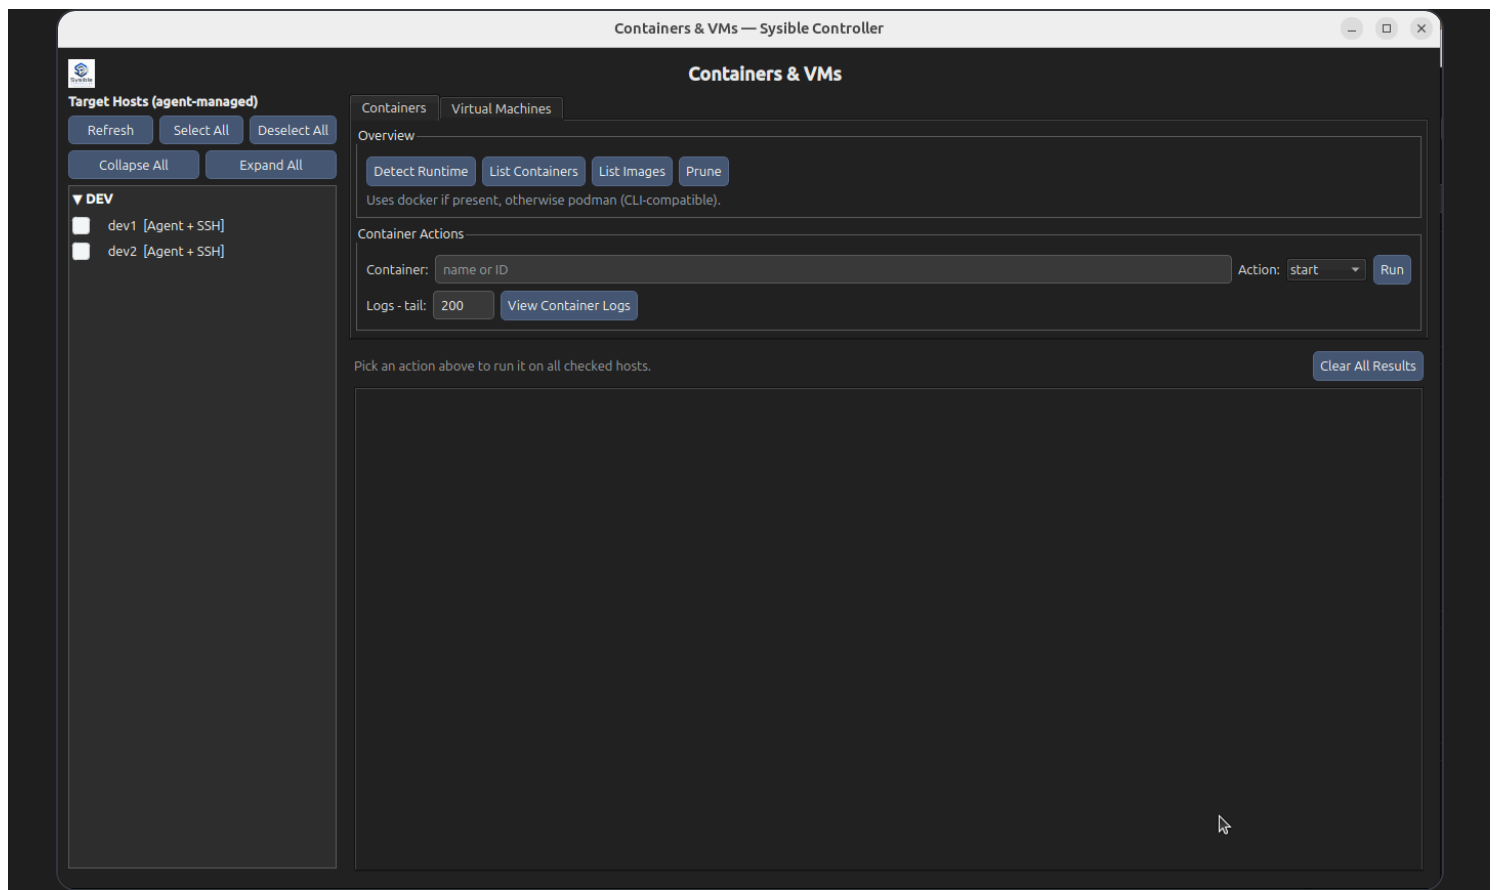

1. Open **System Administration** → **Containers & VMs**.
2. Check one or more hosts in the **Target Hosts** list (use Select All for the whole fleet).
3. Click **Detect Runtime**, then **List Containers**, **View Container Logs**, **Run**, or **Prune**; the **Virtual Machines** tab manages libvirt VMs.

## Directory Services (Active Directory / LDAP)

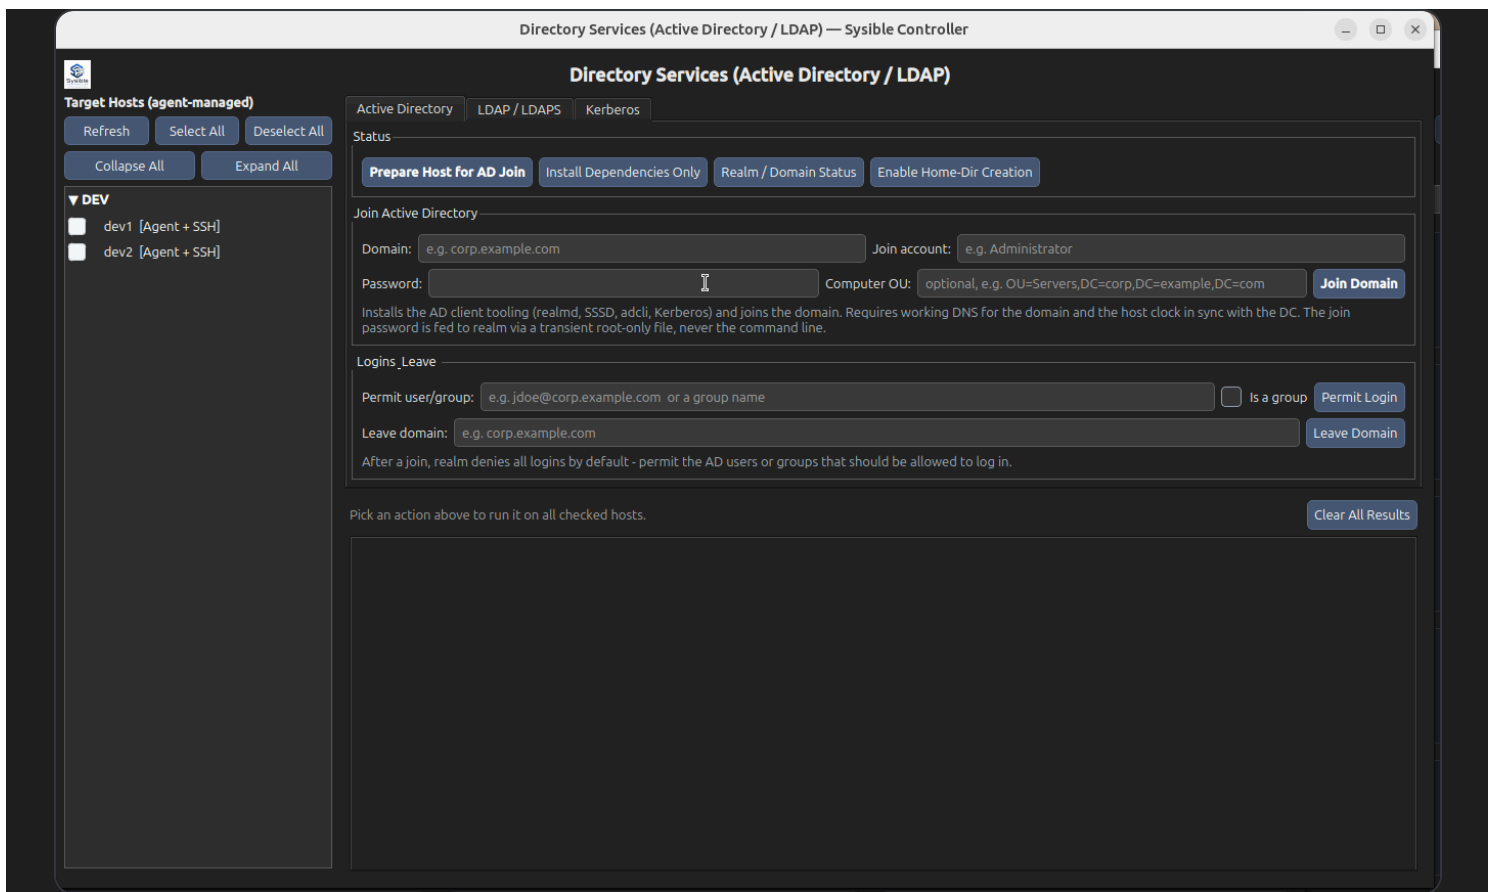

1. Open **System Administration** → **Directory Services** and check the target hosts.
2. Click **Prepare Host for AD Join** first — it installs the tooling, syncs time, enables home-dir creation, and verifies the domain's SRV records resolve.
3. With a clean readiness report, click **Join Domain** then **Permit Login**; the **LDAP / LDAPS** and **Kerberos** tabs configure and test identity.

## Distro Subscription & Licensing



Distro Subscription & Licensing — Sysible Controller

### Distro Subscription & Licensing

Overview | Red Hat (RHSM) | Ubuntu Pro | SUSE (SCC)

What is this host?

**Detect Distro & Subscription Tools**

Each vendor tab only works on its own distro: Red Hat (RHSM) on RHEL-family hosts, Ubuntu Pro on Ubuntu, SUSE (SCC) on SLES/openSUSE. Detect first to see which applies. Registration secrets (RHSM password, Pro token, SUSE reg-code) are passed to the vendor tool as it requires; prefer RHSM activation keys where you can.

Register All Selected Hosts (auto-detect vendor)

Registers every checked host with its own subscription system. Fill in only the vendors you have: Red Hat (org + activation key, or username + password), Ubuntu Pro (token), and/or SUSE (reg-code). Dispatched across all checked hosts at once — e.g. select five RHEL servers and register them together.

RHSM Org:  Activation Key:

RHSM User:  Password:  ☒ Auto-attach

Ubuntu Pro Token:  SUSE Reg-Code:  SUSE Email:

**Register All Selected Hosts**

Pick an action above to run it on all checked hosts. **Clear All Results**

1. Open **System Administration** → **Distro Subscription & Licensing**.
2. On **Overview**, click **Detect Distro & Subscription Tools** to see which vendor applies; check the hosts to act on.
3. Use the matching tab — **Red Hat (RHSM)** (**Register All** registers + auto-attaches every checked host at once), **Ubuntu Pro** (attach a token, enable services), or **SUSE (SCC)** (register a reg-code) — then **Status / List** to confirm.

## Sysible Controller Settings



## Sysible Controller Settings

### Controller Configuration

This is what generated agent bundles (see Webserver Portal Configuration) will be configured to talk to. Set a Hostname, an IP Address, or both - then choose which one bundles should actually use below. "All Detected IPs" skips picking entirely; every address found on this controller is baked into the bundle, and the agent tries each one until one connects - useful when this controller has more than one network path (e.g. LAN + VPN) and you're not sure which managed hosts can reach which.

Hostname:

NetworkController

IP Address:

192.168.1.29

Detect Local IPs

Detected on this controller: 192.168.1.29, 192.168.10.6

Use for agent bundles:

Hostname

Must match the port the sysible-backend service actually binds the HTTPS API to (9000 unless changed). This is NOT the Webserver Portal's port (set on its own page) - an agent built with the wrong number here will fail to connect.

Port:

9000

Refresh

Save Controller Configuration

### TLS Certificate

The certificate the controller presents over HTTPS, to this dashboard and every enrolled agent. Self-signed by default (install\_sysible.sh) - install one issued by your PKI team here instead if you have one. Installing replaces it immediately and restarts the backend to apply it; every open Sysible window briefly shows as disconnected, then recovers on its own. Already-enrolled agents and GUI machines keep trusting whatever certificate they last pinned until you redistribute the new one to them - use Download Trust Certificate below and copy it over SYSIBLE\_CA\_CERT on each. New agent bundles built after installing pick up the new trust certificate automatically.

Self-signed - valid, expires in 3649 day(s)

Subject: CN=sysible-controller

Issuer: CN=sysible-controller

Refresh

Install Custom Certificate...

Download Trust Certificate

### Administrators

Accounts that can log into this dashboard. A new administrator is forced to change their password on first login.

| Username | Role      | Created By | Last Login     | Must Change Password |
|----------|-----------|------------|----------------|----------------------|
| alice    | Superuser | setup      | 2026-06-25 ... | No                   |
| admin    | Sysadmin  | alice      | 2026-06-25 ... | No                   |
| gurl     | Sysadmin  | alice      | 2026-06-25 ... | No                   |

Refresh

Remove Selected Administrator

Add Administrator

Username:

Temporary Password:

Role: Sysadmin (run tools on hosts)

Add Administrator

Change My Own Credentials

Logged in as: cdovbish

Current Password:

New Username:

cdovbish

New Password:

Confirm New Password:

Save My Credentials

1. Open **Sysible Controller Settings** from the Dashboard.
2. Set the controller address/port, and add administrators choosing a **role** — **Superuser** (manage admins, see live logs) or **Sysadmin** (fleet tools only). Tune the admin password policy.
3. Review the **Audit Log** and record a license key under **License & Version**.



## Webserver Portal Configuration

### Portal Service

Status: stopped URL: https://10.0.1.5:8443

Port

Start Portal

Stop Portal

Save Port

### Portal Credentials

Username

New password

Save Credentials

Remove Login Access

### Login History & Active Sessions

2026-06-22 08:02 ops success 10.0.4.2

Refresh Login History

Refresh Sessions

Revoke Selected

### Shared File Pool

agent-bundle.zip · runbook.pdf

Add File...

Save To Computer...

Delete

1. Open **Webserver Portal Configuration** from the Dashboard.
2. Set a port and credentials, then click **Start Portal**.
3. Share the URL with host operators; manage the shared file pool and review login history/sessions here.