

# Learn CSS by Playing Games



@\_codevalley



Zuhaib Asif

FLEXBOXDEFENCE


flexboxdefence.com


Flexbox Defense

<

Wave 1 of 12


>



Use the `justify-content` property to move these two towers into position. Click the  button in the stylesheet for a reminder on how the property works.

1

`.tower-group-1 {`



2

`display: flex;`

3





4


`}`

☒ hide tower inputs

Start Wave

Made by Channing Allen



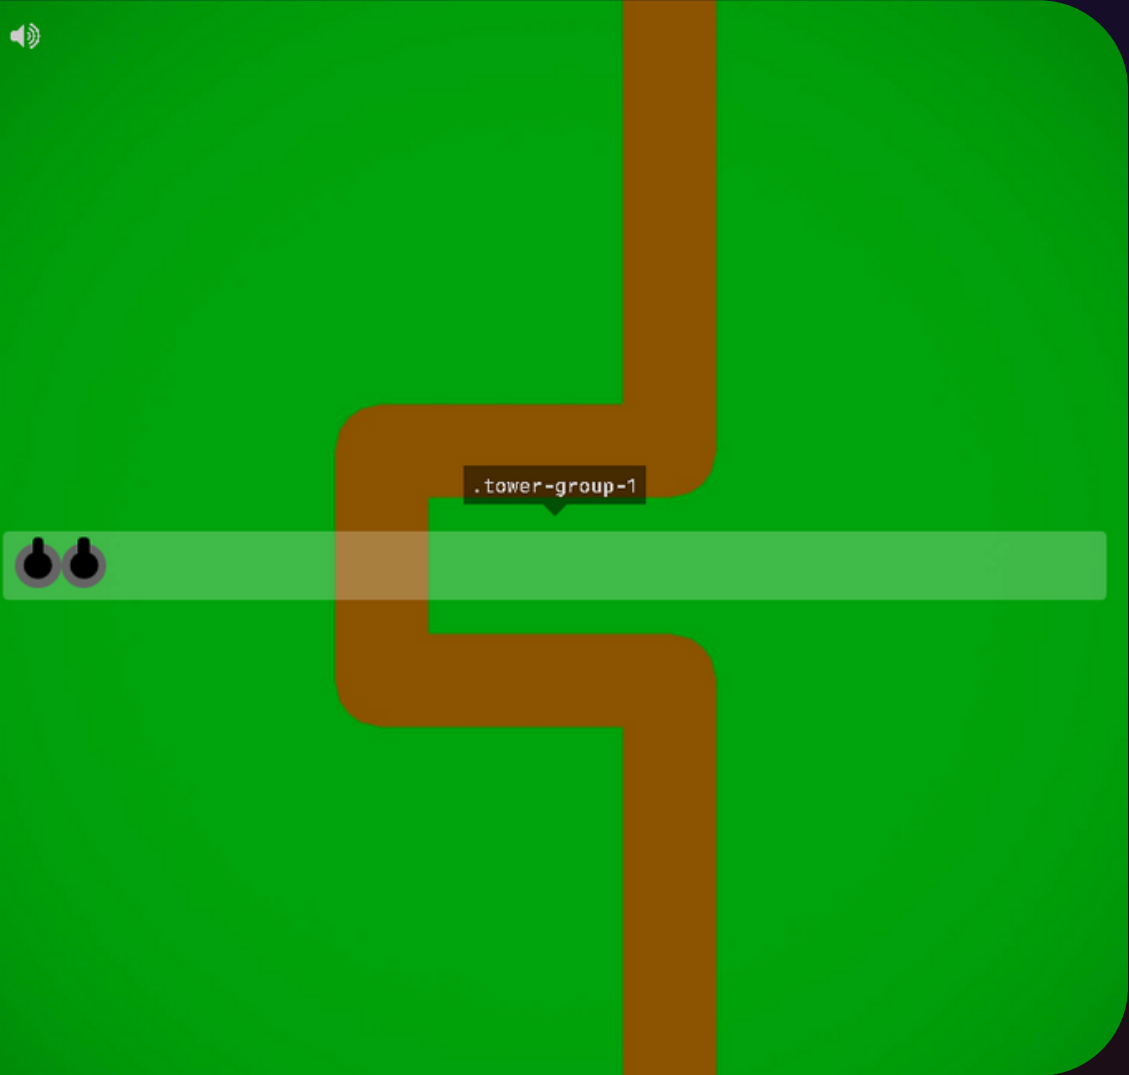



@\_codevalley



Zuhaib Asif

# CSSGRIDGARDEN

*cssgridgarden.com*

## GRID GARDEN

◀ Level 1 of 28 ▶

Welcome to Grid Garden, where you write CSS code to grow your carrot garden!  
Water only the areas that have carrots by using the `grid-column-start` property.

For example, `grid-column-start: 3;` will water the area starting at the 3rd vertical grid line, which is another way of saying the 3rd vertical border from the left in the grid.

```
1 #garden {  
2   display: grid;  
3   grid-template-columns: 20% 20% 20% 20% 20%;  
4   grid-template-rows: 20% 20% 20% 20% 20%;  
5 }  
6  
7 #water {  
8     
9 }  
10  
11  
12  
13  
14
```

Next

Grid Garden authored on [Codepen](#) • [GitHub](#) • [Twitter](#) • [English](#)

Want to learn CSS flexbox? Play [Flexbox Froggy](#).





@\_codevalley



Zuhaib Asif

# CODEPIP

codepip.com



Games

Plans

Blog


Log in

Sign up

## Learn to code by playing games

Codepip is the platform for your favorite web development games. Gain an edge in your next interview or project.

Create a free account

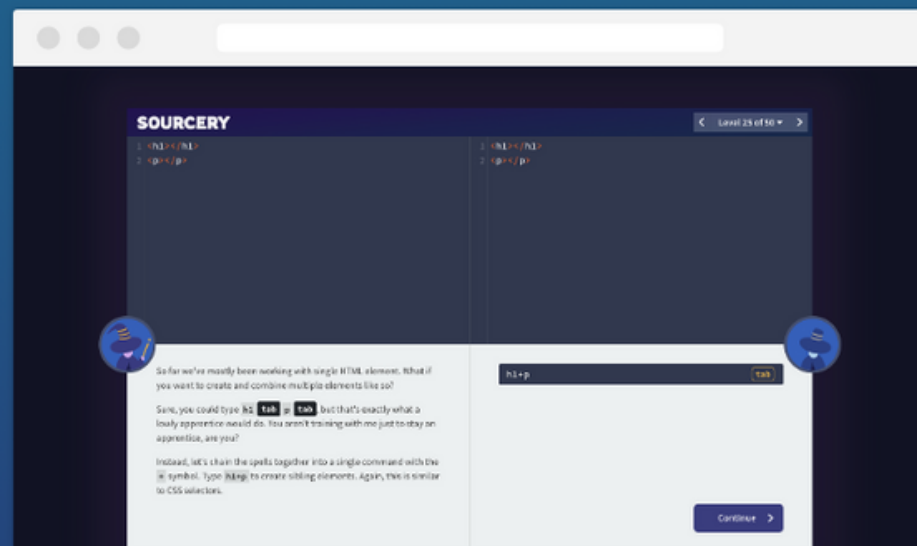

Create a free account to enjoy these features

# FLUKEOUT

flukeout.github.io

Select the plates

Help, I'm stuck!



CSS Editor

style.css

HTML Viewer

table.html

```
1 |Type in a CSS selector| enter
2 {
3 /* Styles would go here. */
4 }
5
6 /*
7 Type a number to skip to a level.
8 Ex → "5" for level 5
9 */
10
11
12
13
14
```

```
1 <div class="table">
2   <plate />
3   <plate />
4 </div>
5
6
7
8
9
10
11
12
13
14
```

## Type Selector

Select elements by their type

A

Selects all elements of type **A**. Type refers to the type of tag, so **<div>**, **<p>** and **<ul>** are all different element types.

## Examples

**div** selects all **<div>** elements.

**p** selects all **<p>** elements.



@\_codevalley



Zuhaib Asif

# CSSBATTLE

cssbattle.dev

## WELCOME

### Welcome to CSSBattle!

CSS code-golfing game is here! Use your CSS skills to replicate targets with smallest possible code. Feel free to check out the targets below and put your CSS skills to test.

[Sign In](#) / [Sign Up](#)

## BATTLES



90

Players Online

### CSSBattle's "LEARN"

Want to learn CSS before you battle?

[Learn CSS](#)

#### Custom Battles

[Sign In](#) to host a battle

Hosting a conference, meetup, company engineering event or just want to have some nerd fun? [Read more about Custom Battles.](#)

## GLOBAL LEADERBOARD

You: -/257036



Jeroen Meijers **PRO**  
93192.00 (132 Targets)



Beo  
93188.17 (132 Targets)



Gabriele  
92616.12 (132 Targets)



Ilya Streltsyn **PRO**  
92481.71 (132 Targets)

4th



JFrandomm  
92049.48 (132 Targets)

5th

## ACTIVITY TIMELINE



Beo set a new record on Target #85 with 127 chars (-1).  
12 days ago



JFrandomm set a new record on Target #48 with 127 chars (-1).  
22 days ago



# CODEMONKEY

codemonkey.com

