

Revealjs Presentation

Built with Quarto

Siyuan Wang

Sothorn University of Science and Technology

May 12, 2026

Contents

- Meet Revealjs & Quarto

Meet Revealjs & Quarto

Hello World! 你好, 世界!

This is a subtitle

This is an example of footnotes:

- apple¹
 - banana²
 - orange³

Figure 1 is a mermaid example:

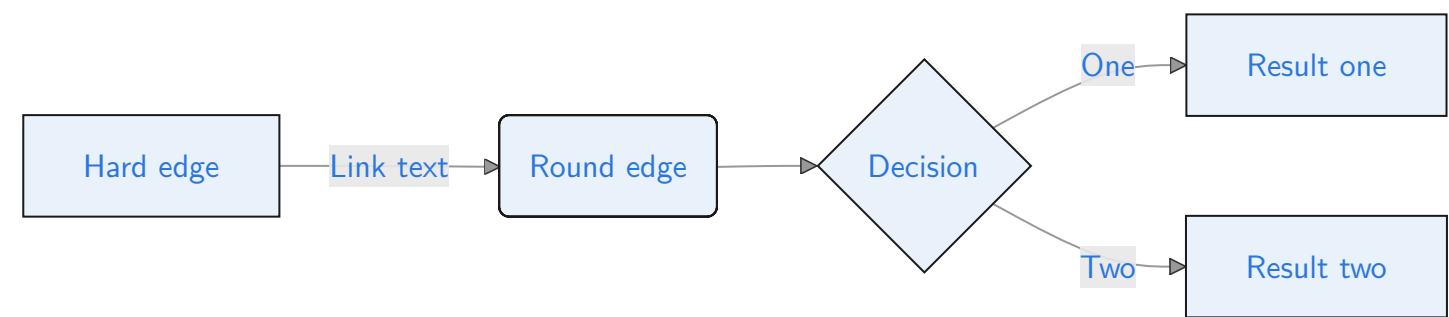


Figure 1: This is a simple mermaid graph.

Here are some footnotes (This is created with an `aside` tag)

1. apple reference
2. banana reference

Callout Blocks

Here are some types of callout blocks

 **Callout Warning**

This is the content of the callout block.

 **Callout Note**

This is the content of the callout block.

 **Callout Important**

This is the content of the callout block.

 **Callout Tip**

This is the content of the callout block.

 **Callout Caution**

This is the content of the callout block.

Alerts & Cross-refs

To emphasize specific words or text, you can:

- Use the default `.alert` class, e.g. `important note`.
- Use the `.fg` class for custom colour, e.g. `important note`.
- Use the `.bg` class for custom background, e.g. `important note`.

Test cross-reference

Click below:

Section 1.3

Speaker notes and Incremental

Open speaker's mode (press **s** key) to see the notes

Ordered and Unordered Lists

Here we have an unordered list.

- first item
 - sub-item
 - second item

And next we have an ordered one.

1. first item
 - i. sub-item
 - ii. second sub-item
2. second item

This page has no footer

This page has no footer

Add {footer=false} to the page header

This page has custom footer

This page has customized footer

Pics & Videos & HTML

- Simple figure without caption



XinBaoDao Dance

- Figure that can cite as: Figure 2



XinBaoDao Dance

Figure 2

SubFigs

As shownn the Figure 3, Figure 3 (a), Figure 3 (b)



(a) xinbaodao1



(b) xinbaodao2

Figure 3: Famous XinBaoDao

Tables

Table Usage

Table 1 is a regular table

Table 1: Demonstration of pipe table syntax

Default	Left	Right	Center
12	12	12	12
123	123	123	123
1	1	1	1

Table 2 can adjust width

Table 2: Fruit prices

fruit	price
apple	2.05
pear	1.37
orange	3.09

Table 3 creates table with python code chunk

Table 3: Astronomical object

Astronomical object	R (km)	mass (kg)
Sun	696,000	1.989e+30

Code Blocks

- Normal Code Block

```
1 import numpy as np
2 import matplotlib.pyplot as plt
3
4 r = np.arange(0, 2, 0.01)
5 theta = 2 * np.pi * r
6 fig, ax = plt.subplots(subplot_kw={'projection': 'polar'})
7 ax.plot(theta, r)
8 ax.set_rticks([0.5, 1, 1.5, 2])
9 ax.grid(True)
10 plt.show()
```


- Code Block with highlight

```
1 import numpy as np
2 import matplotlib.pyplot as plt
3
4 r = np.arange(0, 2, 0.01)
5 theta = 2 * np.pi * r
6 fig, ax = plt.subplots(subplot_kw={'projection': 'polar'})
7 ax.plot(theta, r)
8 ax.set_rticks([0.5, 1, 1.5, 2])
9 ax.grid(True)
10 plt.show()
```

```
1 import numpy as np
2 import matplotlib.pyplot as plt
3
4 r = np.arange(0, 2, 0.01)
5 theta = 2 * np.pi * r
6 fig, ax = plt.subplots(subplot_kw={'projection': 'polar'})
7 ax.plot(theta, r)
8 ax.set_rticks([0.5, 1, 1.5, 2])
9 ax.grid(True)
10 plt.show()
```

Executable Code

```
1 import numpy as np
2 import matplotlib.pyplot as plt
3
4 r = np.arange(0, 2, 0.01)
5 theta = 2 * np.pi * r
6 fig, ax = plt.subplots(subplot_kw={"projection": "polar"})
7 ax.plot(theta, r)
8 ax.set_rticks([0.5, 1, 1.5, 2])
9 ax.grid(True)
10 plt.show()
```

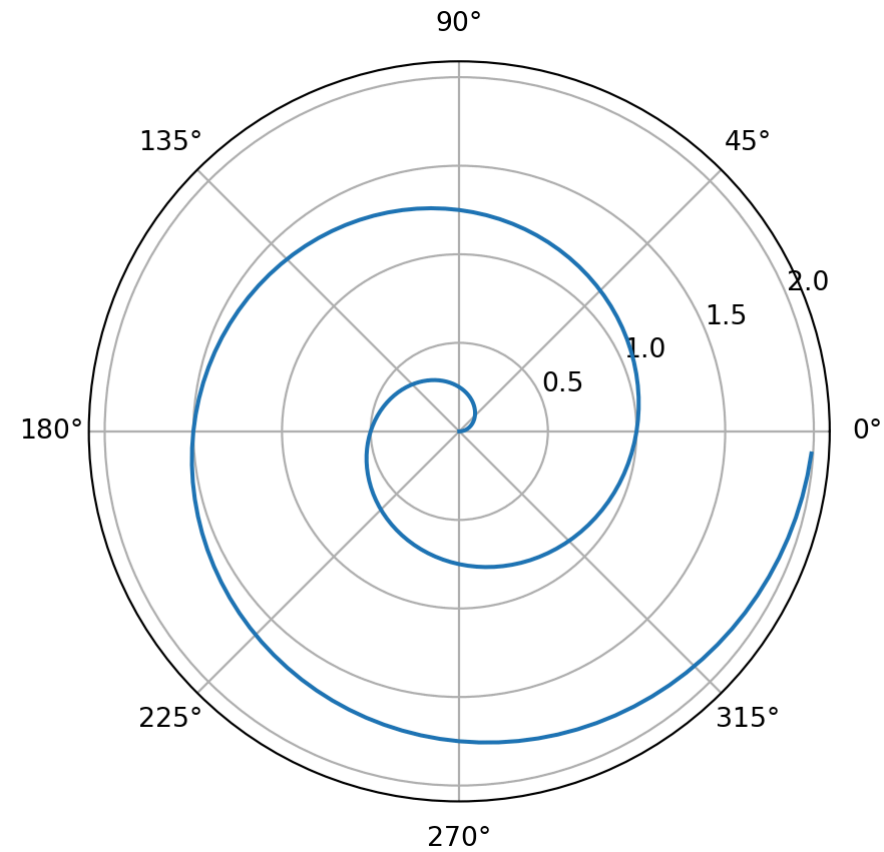

Equations, Citations

- Einstein's theory of special relatively that expresses the equivalence of mass and energy:

$$E = mc^2$$

- Input an inline equation: $\mathbb{E}(x) = \int x f(x) dx$
- Cite a reference like (Peng et al. 2021).

Tabsets

Tab A

Tab B

Content for [Tab A](#)

Tabsets

Tab A

Tab B

Content for [Tab B](#)

Tow Columns

- Column 1

- apple

- banana

- Column 2

- orange

- watermelon

References

Peng, Xue Bin, Ze Ma, Pieter Abbeel, Sergey Levine, and Angjoo Kanazawa. 2021. “AMP: Adversarial Motion Priors for Stylized Physics-Based Character Control.” *ACM Transactions on Graphics* 40 (4): 1–20. <https://doi.org/10.1145/3450626.3459670>.