

ZScore User Guide

For *Socket Dialogues*

This guide explains basic ZScore system features, such as the score loading and playing.

For more advanced features please contact the author via email slavko@zagorac.com

ZScore feature explanations were correct at the time of writing (Jun 2023).

Download

Use the URL below to download ZScore package for *Socket Dialogues* score:

<https://drive.google.com/drive/folders/1F8qE1NYexNxKyNp2l7jjRBslh6ptNlZc?usp=sharing>

Package Content

The package contains two directories:

- max (Max patch and data)
- scores (score data)
- zscore (application data)

The zscore directory contains following directories:

- zscore_jgui (ZScore GUI and server)
- webroot (Web Score content)
- audienceWebroot (Audience Web content)

Score resources can be found in scores.zip while Max 8 patches are stored in max.zip file.

A standalone Max 8 patch app for MacOS is available, if required. It does not require Max 8 installation, however, due to its size (> 1GB) Max 8 installation is preferable.

Installation

ZScore software can be run on any desktop operating system, providing that the third-party software dependencies outlined below are installed.

Required third-party software

| | |
|---------------|---|
| Java | <p>ZScore performance control GUI and server require Java jdk 1.8 (Java SE Development Kit) which can be installed from</p> <p>https://www.oracle.com/java/technologies/javase/javase8u211-later-archive-downloads.html</p> <p>Once jdk is installed please check that that the installation is valid (version check is good enough):</p> <p>https://www.baeldung.com/java-check-is-installed</p> |
| Max 8 | <p>Some scores written for ZScore use Max 8 as a digital audio source. If Max patches are required to play the score, please install Max 8 (free for 30 days) or download the standalone ZScore patch app (MacOS only).</p> <p>https://cycling74.com/downloads</p> |
| ZScore | <p>Download and unzip zscoreDialogues.zip into any directory (<installDir>)</p> |

How to run ZScore

Navigate to the directory where ZScore packages were unzipped (<installDir>), either through the computer's file system browser (Finder, Windows explorer...) or via a command line.

Run integrated ZScore application (GUI + Server)

Go to the "zscore" directory (<installDir>/zscore).

| | |
|------------|--|
| On MacOS | double click zscore.command or execute the command line script: <code>./zscore.sh</code> TIP: If you get macOS unidentified developer warning: right click on zscore.command → select Open → click Open button. |
| On Linux | execute the command line script: <code>./zscore.sh</code> TIP: works on any Unix OS flavour |
| On Windows | double click zscore.bat or execute it from the command line. TIP: If you get Windows Defender blue window warning: click on More Info → Run Anyway. |

The script execution above should open a new terminal window containing a startup log.

TIP: Do not close this window as it will terminate the application.

The ZScore GUI should appear after a while, if everything is ok.

The figure below shows what the ZScore GUI should look like.

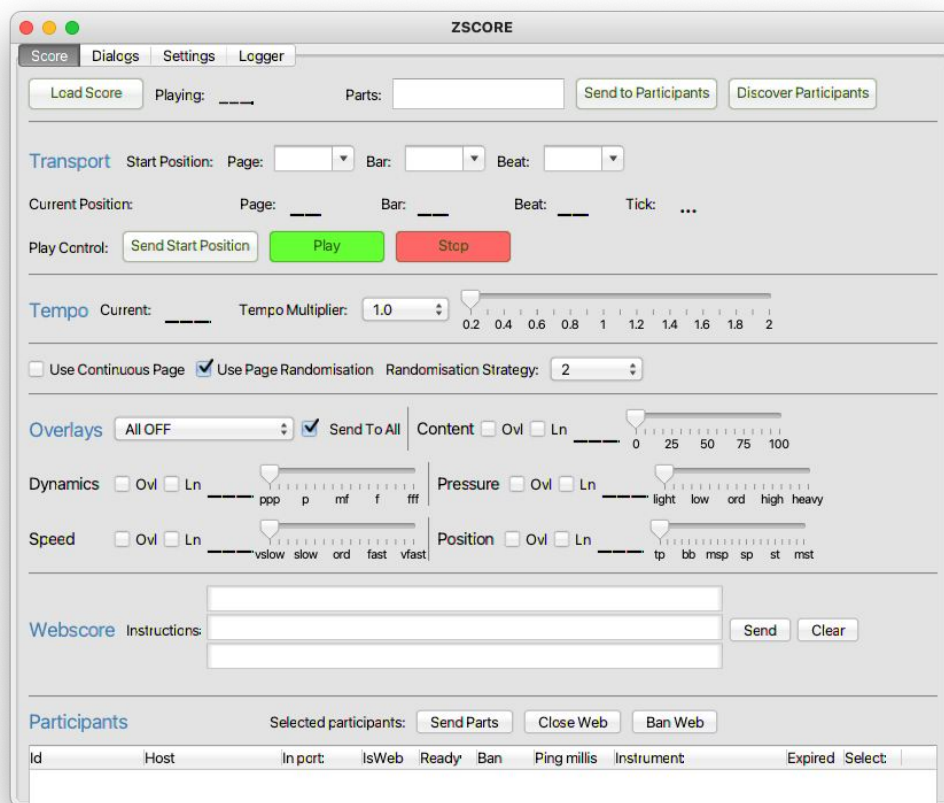


Figure 1: ZScore performance control GUI

TIP: If this does not happen, or in case of any other issues, please check for any errors in the log file (szcoreApp.log).

The log file should be available in “zscore” directory (<installDir>/zscore), or in whatever directory the app was started from.

Load Score

In the ZScore GUI, click the “Load Score” button available in the top left corner of the “Score” tab.

Please note that *Socket Dialogues* name is shortened to **dialogs** in all file names.

Navigate to the installed “scores” directory and find the required composition subdirectory:

<installDir>/scores/dialogs



Figure 2: Socket Dialogues score directory

Select and open file **1_Dialogs_BeatInfo.csv**

TIP: Required BeatInfo file should be at the top of the list if the file browser’s view is sorted by name.

If the score load was successful, ZScore GUI should display all available parts and the composition name as illustrated in Figure 3.

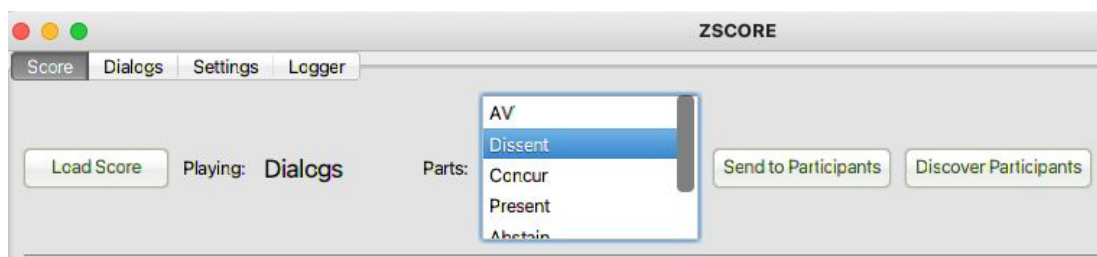


Figure 3: Successfully loaded score view

TIP: You can resize GUI as required by dragging corners.

Socket Dialogues score is managed and run from the Dialogs tab illustrated in Figure 4

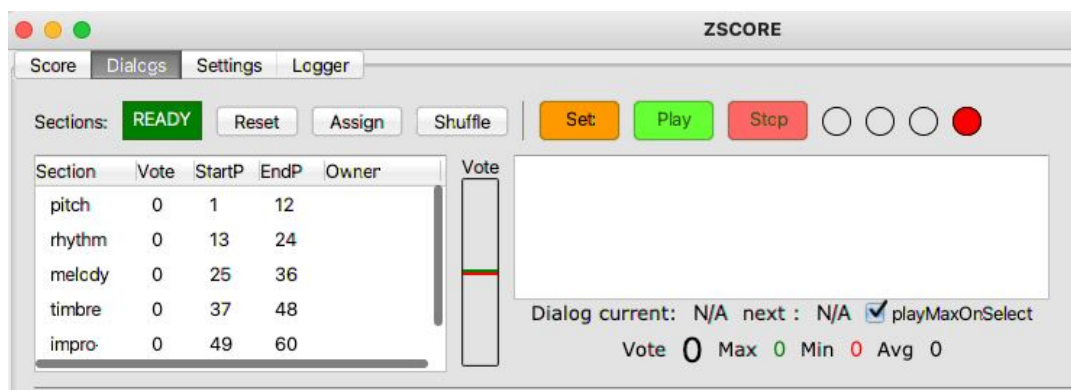


Figure 4: Socket Dialogues Tab

Web Score View

Open an Internet browser (the latest version of any modern browser should do).

In the browser address bar at the top, put:

<http://localhost:8080/> (if the browser is running on the same computer as ZScore GUI,

or

http://<host_ip_address>:8080/ (if the browser is running on another device on the same network)

where <host_ip_address> is the IP Address or hostname of the computer where ZScore GUI is running.

This IP address can be found in the ZScore GUI “Settings” tab, next to “Server Address”.

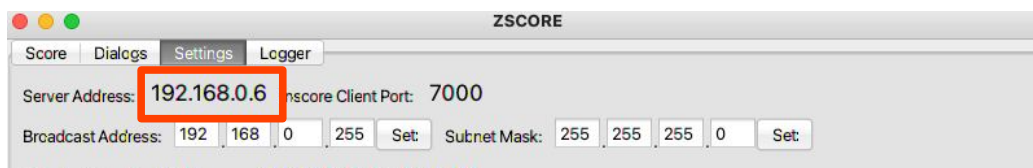


Figure 5: Host IP Address example

TIP: In the custom ZScore performance environment this address is <http://zscore:8080/>

The browser should now display a menu of available scores as illustrated in Figure 6.

Welcome to ZScore

Performers' View

Dialogs

Instrument Part

Figure 6: Web Score default view

To view the instrument part, please click on the appropriate “Instrument Part” link.

The browser should now display the “Select Transposition” view shown in Figure 7.

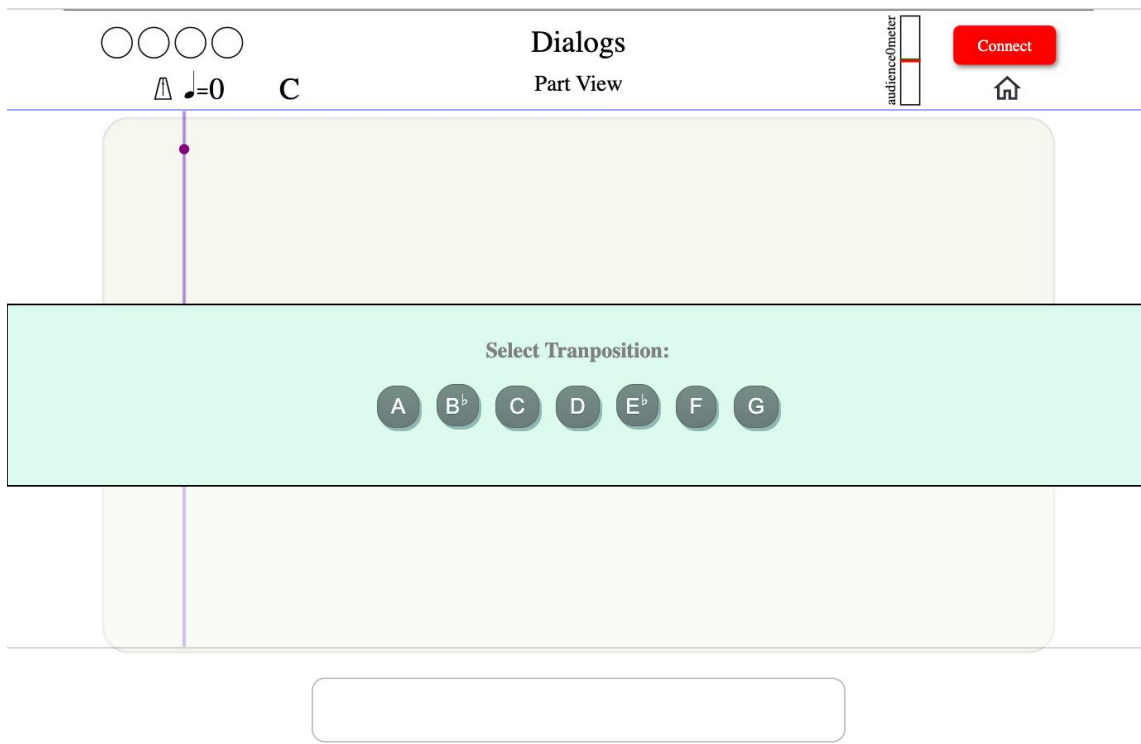


Figure 7: Socket Dialogues, Web Score initial view

Select the appropriate transposition (C for default notation).

The view should change to the Presenter selection view as illustrated in Figure 8.

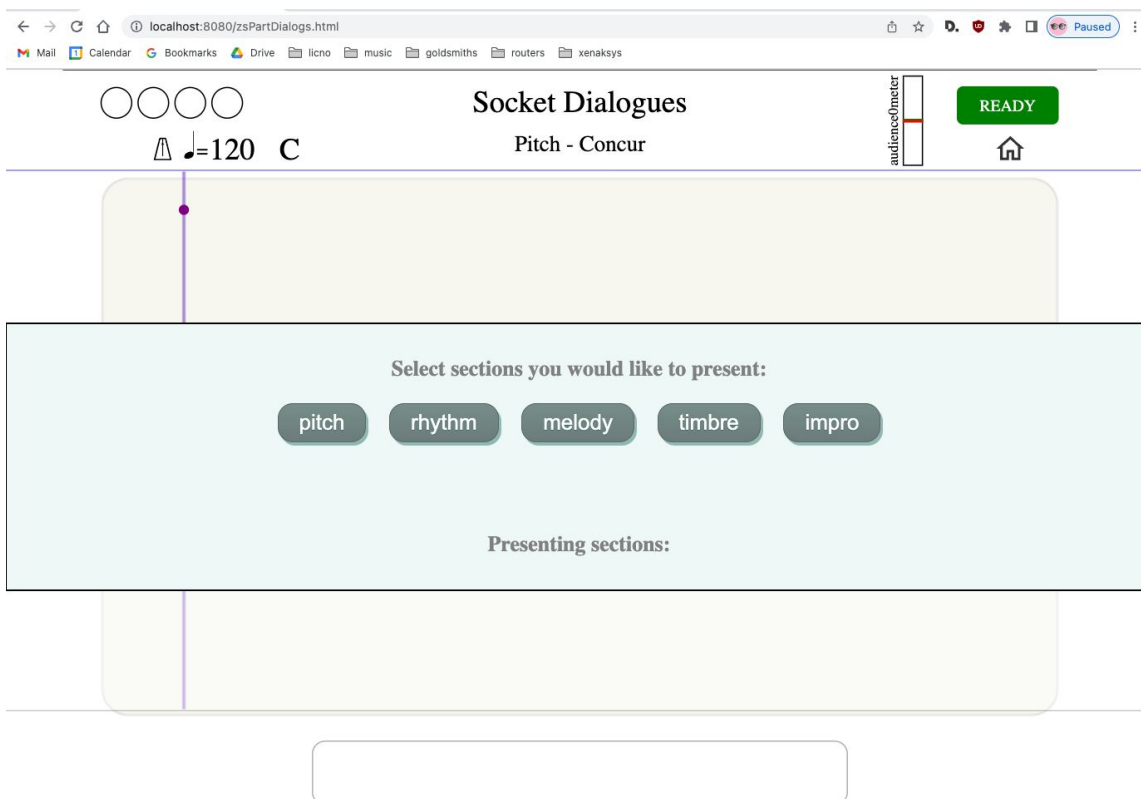


Figure 8: Socket Dialogues, Presenter selection screen

Musicians should then select Dialogues they wish to present.

The order of selection also sets the order of play. The selection order can be observed in the Dialogs tab. For the example illustrated in Figure 9, the order of play is:

melody → pitch → rhythm → impro → timbre

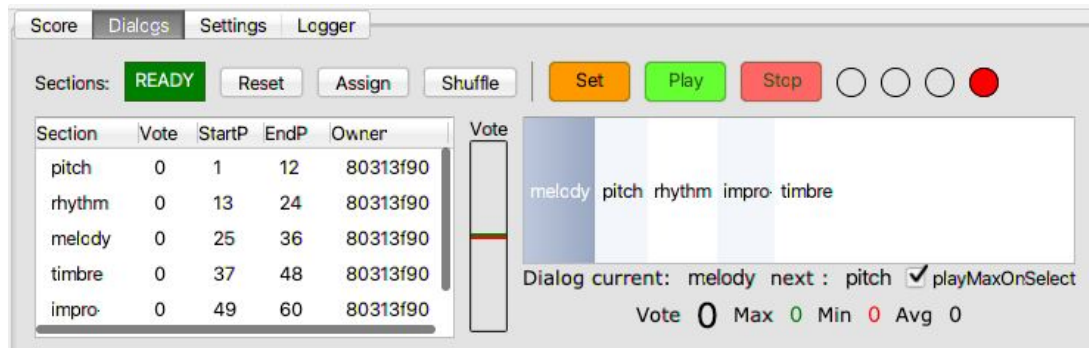


Figure 9: Socket Dialogues, order of play

The conductor can change the order of play by selecting the dialogue name in the list on the right (Figure 9) and clicking the orange “Set” button.

All Dialogues have to be selected by one of the Presenters before the start of the play.

Play Dialogue

Select Dialog tab in the ZScore GUI.

To manage the dialogue play, use buttons “Set”, “Play”, and “Stop” displayed in Figure 10.

To play the selected dialogue, always use the sequence:

1. “Set” (sends all required data to network clients for the selected dialogue)
2. “Play” (starts dialogue play)



Figure 10: Socket Dialogues, play management

To stop dialogue play at any point, use “Stop” button.

On “Set” button click, the Presenter’s view should be updated as illustrated in Figure 11.

Figure 11: Socket Dialogues, Presenter’s view on “Set”

On green “Play” button click (Figure 10), all clients should start playing the selected dialogue.

The semaphore in the top left corner of the web score should count down to the performance start.

Once the score is started, the position line will move to indicate current position in the score. Also, the bouncing ball on the top of the staff will indicate current tempo.

The score layout consists of two staves (top and bottom). One is always active (currently played) and the other one is preparatory (showing the upcoming notation).

Play starts from the beginning of the top staff and continues to the bottom staff. Once the bottom staff is completed, play continues from the beginning of the top staff.

Performer Actions

All connected musicians, apart from the Presenter, can choose their role in the Dialogue by selecting one of the options: “Concur”, “Dissent”, or “Abstain” as illustrated in Figure 12.

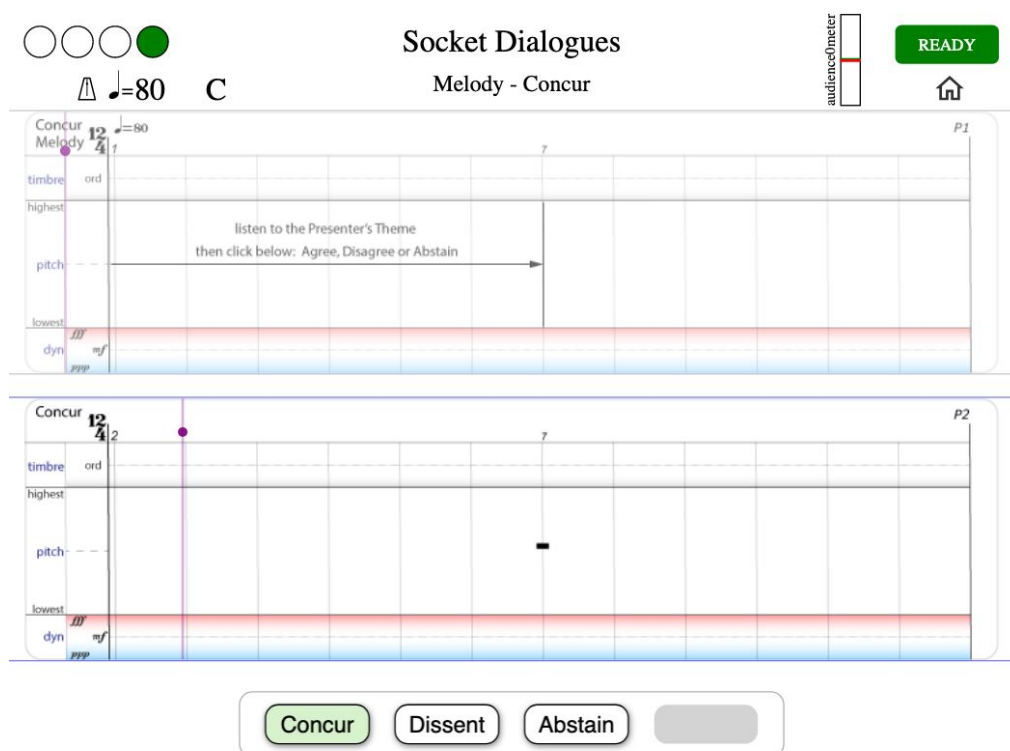


Figure 12: Socket dialogues, musician's role selection

The notation for the selected role is displayed in the next time window.

Please Note: If you wish to run multiple Web Score Clients from the same machine, please use different internet browser make for each client (e.g. Chrome for one client and FireFox for another), as the performer Id is unique for the combination of the hostname/browser make.

Audience Score View

Audience score is usually accessed via mobile devices, however, any computer can be used, including the localhost.

Open an Internet browser (the latest version of any modern browser should do).

In the browser address bar at the top, put:

<http://localhost> (if the browser is running on the same computer as ZScore GUI)

or

http://<host_ip_address> (if the browser is running on another device on the same network)

where <host_ip_address> is the IP Address or hostname of the computer where ZScore GUI is running.

This address is available in the ZScore GUI “Settings” tab under “Server Address” (Figure 5).

In the custom ZScore performance environment, audience view address is: <http://zscore/>

The browser should now show the welcome page as illustrated in Figure 13.

Welcome to ZScore



Join
the performance

Figure 13: Audience view welcome page

Click on the “Join” button to connect to the ZScore audience server.

Once the browser is connected to the server, the view should change to the composition specific welcome page.

An example of the initial view for “Socket Dialogues” is shown in Figure 14.

Preparing for the next Dialogue



Figure 14: Socket Dialogues, audience initial view

Once the score is started, as described above, the audience view will be played in sync with the performers' score.

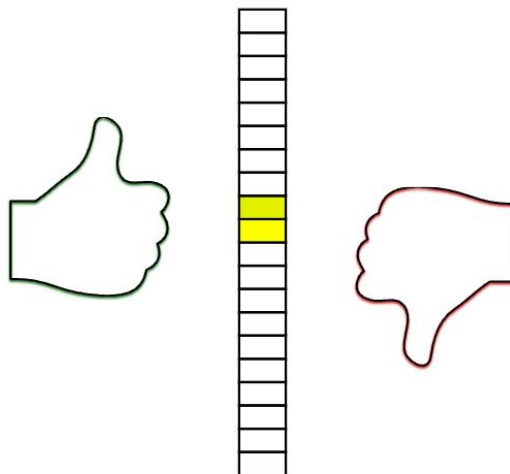


Figure 15: Socket Dialogues, vote view

The Web Score and Audience view can be modified from ZScore GUI.

In Dialogs tab there are a number controls that can modify the current view, such as Text lines, Audience view presets (notes, thumbs, meter, etc.).

The screenshot displays the 'Dialogs' tab in the ZScore GUI, which is divided into three main sections: 'Text', 'Audience', and 'Presets'.

- Text Section:** Features three input fields labeled 'L1:', 'L2:', and 'L3:'. To the right of these fields are 'Send' and 'Clear' buttons.
- Audience Section:** Contains a 'Send To:' label followed by five checkboxes: 'Present' (checked), 'Concur' (checked), 'Dissent' (checked), 'Abstain' (checked), and 'Audience' (unchecked). Below these are three checkboxes: 'Instruments' (checked), 'Audience' (unchecked), and 'All' (unchecked). Further right, there are checkboxes for 'Notes', 'Thumbs', and 'Meter' (checked), along with a 'Send' button. To the right of the 'Send' button are two dropdown menus for 'Freq' (set to 1.0) and 'Dur' (set to 8.0). Below these are three radio buttons for 'mf', 'f', and 'ff', and three radio buttons for 'mp', 'p', and 'pp'. To the far right are two sliders labeled 'Master' and 'Vol', and a 'Synth' label.
- Presets Section:** Includes a row of radio buttons: 'Score', 'Free', 'Audience' (selected), 'NOTES', 'Thumbs', 'Welcme' (selected), 'Intro', and 'END'. Below this row is a label 'Impro All:' followed by a row of radio buttons: 'Current', 'Pitch', 'Rhythm', 'Melody', 'Timbre', and 'Impro'. A 'Send' button is located to the right of the 'Impro' radio button.

Figure 16: Socket Dialogues, score view controls

ZScore Max

Some scores use Max 8 as a digital audio source.

To open max patch, navigate to the installed max directory:

<installDir>/max

Double click **1_zscore.maxpat** (it should be the first file on the list if the file browser is sorted by name)

After a while, the patch should appear as displayed in the figure below.

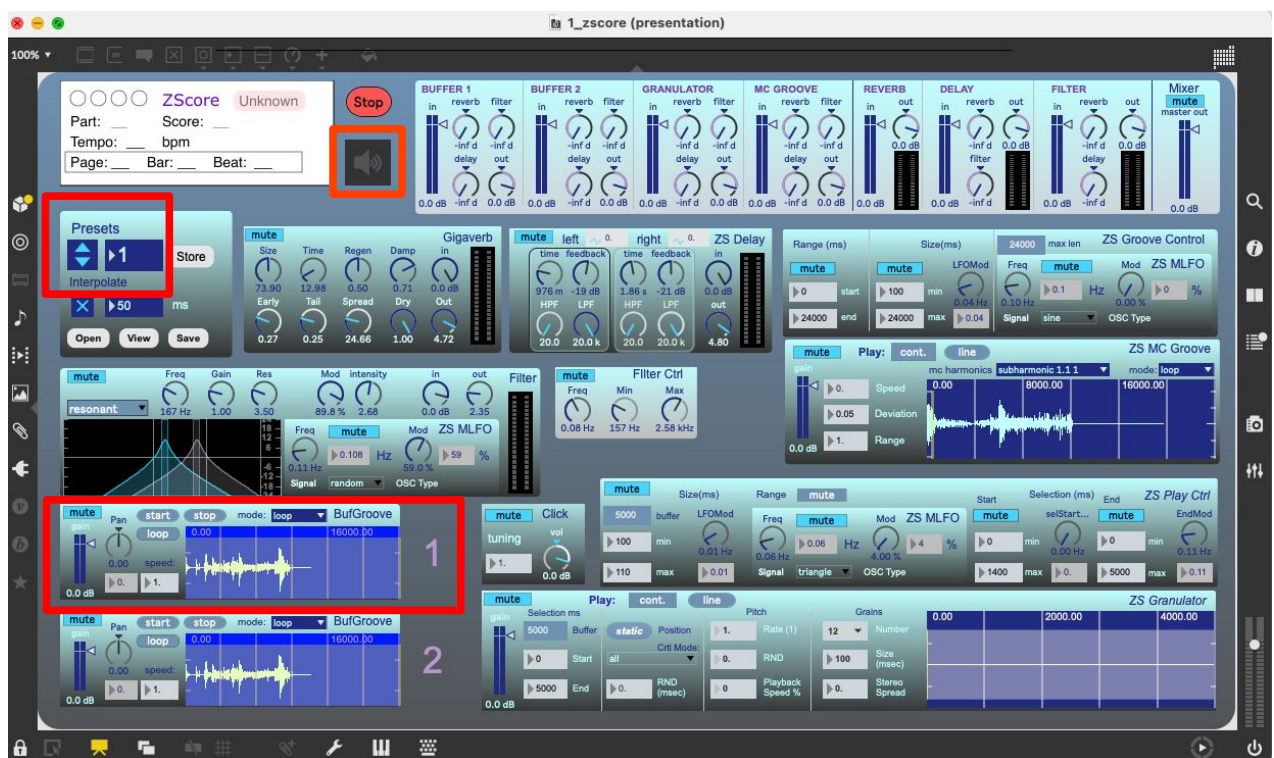


Figure 17: ZScore Max 8 patch

Initialisation and verification

Click on the speaker icon (ezcac~) below the red Stop button (indicated in Figure 13). It should turn blue.

Check the audio in/out devices are set as required (Options → Audio Status → Input/Output Device)

In the ZScore patch “Presets” box, increase the preset number to 2 (indicated in Figure 13).

Click the “start” button on the buffer 1 (indicated in Figure 13).

You should hear the buffer content.

TIP: If there are any problems please check Max Console for errors.

OSC Device Connection (Including Max)

Max patch talks to ZScore server via OSC protocol.

To connect any OSC device (Inscore, Max...) first click on the **“Discover Participants”** button in the ZScore GUI Score tab.



Figure 18: OSC device discovery

After a while, available OSC devices should appear in the Participants table as shown in the figure below.

| Participants | | | | | | | | | |
|--|-------------|---------|-------|-------|-----|-------------|------------|---------|--------------------------|
| Selected participants: Send Parts Close Web Ban Web | | | | | | | | | |
| Id | Host | In port | IsWeb | Ready | Ban | Ping millis | Instrument | Expired | Select |
| | localhost | 51452 | Web | Y | N | 0.0 | Cello | | <input type="checkbox"/> |
| /192.168.0.... | 192.168.0.6 | 6666 | OSC | N | N | 0.0 | N/A | | <input type="checkbox"/> |

Figure 19: OSC device registration

Once the OSC device is visible on the Participants list, click on the **“Send to Participants”** button in the ZScore GUI. This will send score information to all connected OSC devices.



Figure 20: Send to OSC Participants

Max device should be now recognised as “AV” instrument in the Participants list.

| Participants | | | | | | | | | |
|--|-------------|---------|-------|-------|-----|-------------|------------|---------|--------------------------|
| Selected participants: Send Parts Close Web Ban Web | | | | | | | | | |
| Id | Host | In port | IsWeb | Ready | Ban | Ping millis | Instrument | Expired | Select |
| | localhost | 51452 | Web | Y | N | 0.0 | Cello | | <input type="checkbox"/> |
| /192.168.0.... | 192.168.0.6 | 6666 | OSC | Y | N | 0.0 | AV | | <input type="checkbox"/> |

After the “Set” button in the Dialogs tab is clicked (Figure 10), as described above, Max patch should display the score name and current position.



Figure 21: Max patch score info

When the score is played, as described above, Max patch should play in sync with the performers’ and audience views.

Please note: if the check box **playMaxOnSelect** (Figure 10) is ticked, Max will start playing Granulator and MC Groove on each Dialogue start of play. If you do not want this behaviour, please untick the box.

TIP: The sequence “Discover Participants” → “Send to Participants” described above should be executed every time an OSC device is opened/restarted.

TIP: if the Max zscore patch is closed then the entire Max 8 application needs to be shutdown before opening the patch again. Reopening the patch while Max 8 is running might cause errors (please check Max console for any errors)

Latency calibration and compensation

Currently, there is no automated latency compensation in ZScore.

As the Max patch introduces additional latency due to real-time network and audio processing, it is sometimes necessary to calibrate web score latency to be in sync with Max audio.

The calibration can be visual (by observing the current position line in the web score and system latencies in the Participants list) or auditory for a more accurate synchronisation.

Auditory calibration

Both web score and max client have a built-in audio click. The click is only heard during a score play.

To enable/disable the audio click in a **Web Score** client, click on the metronome icon available in the top left corner.

This should enable click control as displayed in the figure below

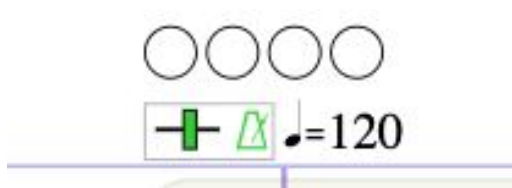


Figure 22: Web score click controls

If required, the click pitch can be changed by dragging the green bar next to the metronome icon left or right.

To enable audio click in the **Max** patch, unmute Click box displayed below.



Figure 23: Max 8 click controls

If required, change click tuning and volume in the Max patch.

Web Event Delay Setting

With both web score and Max click enabled, play the score to hear the time difference between web and Max clients.

TIP: mute all other Max sources apart from the click box.

To modify web score click timing, change Web Event Delay Ms value in the “Settings” tab of the performance control GUI, as illustrated below.

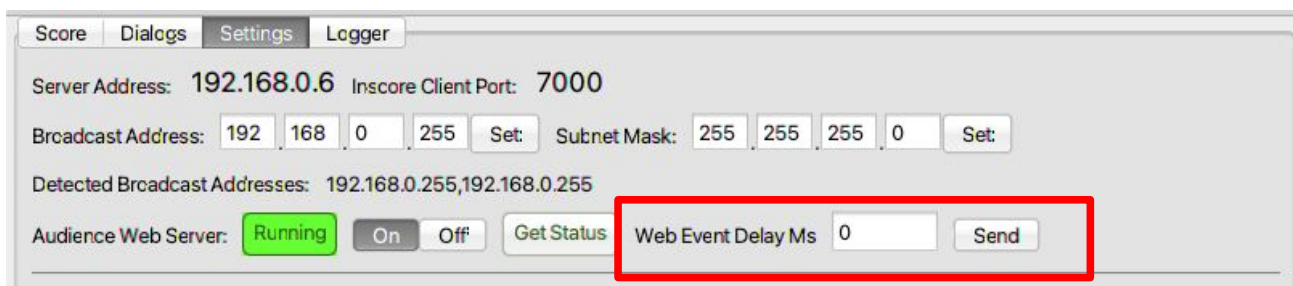


Figure 24: Web score latency delay controls

TIP: Gradually increase web delay until Max and Web score click happen at the same time.

On a local host, a delay value of somewhere between 20 – 50 milliseconds is usually adequate, however, this value may vary significantly depending on the local network configuration.

Once the delay is set to a desired value, disable web score click by clicking on the metronome icon and mute Max 8 Click control.

TIP: In the dedicated ZScore performance environment all score devices are connected via Ethernet cable to minimise latency and jitter. Audience devices connect via Wi-Fi so the audience score view is designed to cope with higher latency variations.